


## CUSTOMER DRAWING

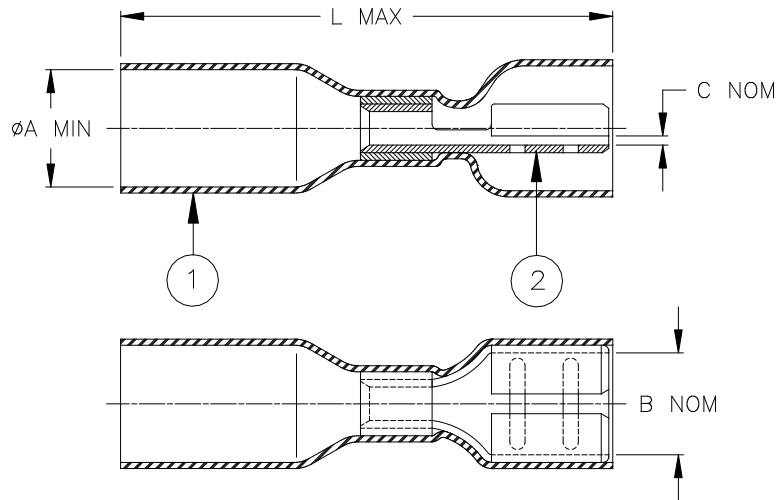

Product Name	Product Dimensions					Wire Dimensions			
	øA min	B nom	C nom	L max	Color (1)	Size Range mm <sup>2</sup> (AWG)	øG		
							min	max	
B-106-3631	4.00 [0.160]	6.60 [0.260]	0.80 [0.030]	30.00 [1.180]	Red	0.5 - 1.0 (AWG 22-18)	1.4 [0.055]	4.0 [0.160]	
B-106-3632	4.60 [0.180]	6.60 [0.260]	0.80 [0.030]	32.00 [1.260]	Blue	1.5 - 2.5 (AWG 16-14)	2.0 [0.080]	4.6 [0.180]	
B-106-3633	6.50 [0.255]	6.60 [0.260]	0.80 [0.030]	33.00 [1.300]	Yellow	3.0 - 6.0 (AWG 12-10)	2.8 [0.110]	6.5 [0.255]	


### MATERIALS


- INSULATION SLEEVE: Heat-shrinkable, transparent color (1), radiation cross-linked modified polyamide with thermoplastic adhesive coating inside.
- PUSH-ON TERMINAL: Tin-plated brass.  
BASE METAL: C260 (C26000) or C268 Brass.  
PLATING: Tin-plated per ASTM B545, Class A.

### APPLICATION

- These controlled crimp devices are designed to terminate a tin-plated or bare copper stranded wire having an insulation rated for at least 75°C to a push-on terminal. It will provide a splash proof and strain relief connection.  
UL listed wire connector 3Z11.
- Temperature range: -55°C to +125°C.
- For application tooling and installation, see RPIP-684-00.

For best results, prepare the wire as shown:



			TITLE: <b>DURASEAL PUSH-ON RECEPTACLE</b>		
Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets]		Raychem Devices	DOCUMENT NO.: <b>B-106-3XXX</b>		
TOLERANCES: 0.00 ± 0.02 MM 0.0 ± 0.2 MM 0 ± 0.5 MM	ANGLES: ± 0°30' ROUGHNESS IN MICRON	TE Connectivity reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.	REVISION: <b>D</b>	DATE: <b>FEB 22, 2017</b>	
PREPARED BY: <b>YNGUYEN</b>	CAGE CODE: <b>06090</b>	REVISED PER: <b>ECO-17-002136</b>	SCALE: <b>NTS</b>	SIZE: <b>A</b>	SHEET: <b>1 of 1</b>

©2015-2017 TE CONNECTIVITY CORPORATION. ALL RIGHTS RESERVED.

If this document is printed it becomes uncontrolled. Check for the latest revision.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for te connectivity manufacturer:*

Other Similar products are found below :

[570416-000](#) [CLTEQ-M81CE-SSRELAY-4-20V](#) [4-1633138-8](#) [D38999/24FJ4AN](#) [4-1195131-0](#) [650069-000](#) [SMD100-2](#) [2EDL4CM](#)  
[DTS20W19-11PD-3028](#) [DTS20W19-11PD-3028-LC](#) [DTS20W19-32SD-3028-LC](#) [DTS20W19-32SD-3028](#) [NC6-P104-06](#) [TXR64AB90-](#)  
[3616AI](#) [DTS26F21-41HE](#) [DTS26F21-41AE](#) [DTS26F21-41PE-LC](#) [DTS26F21-11SE-3028-LC](#) [D38999/24WF32JE](#) [D38999/24WF32SE-LC](#)  
[DTS24W19-32HE](#) [D38999/20JB35HA](#) [D38999/24WJ20PA](#) [164-8033-08](#) [D38999/24FF32JE](#) [D38999/24FF32SE-LC](#) [D38999/24WF32JB](#)  
[D38999/24WG11HA](#) [D38999/24WG11HN](#) [MS27467T21F11H](#) [DJT16E21-11HA](#) [DTS24F19-32HE](#) [DTS20W19-32SA-3028-LC](#) [DTS24F19-](#)  
[11SC-3028-LC](#) [DTS24F19-11SC-3028](#) [DJT14E13-98HB](#) [D38999/20WC8BB](#) [1-330599-5](#) [DTS24F21-41HN-LC](#) [DTS24F21-41HN](#)  
[DTS24F21-41AN](#) [DTS24F21-39HN](#) [DTS24F21-41PN-LC](#) [AFD50-10-6SN-1A-LC](#) [DJT10F17-26HC](#) [DTS24W19-32HB](#) [ACT20JE99HA](#)  
[DJT10E17-26HC](#) [DJT10E17-26HN](#) [DJT10F17-26HA](#)