Molded Parts Specification Control Drawing

234A611 thru 671 Part Number : Description : Boot, Rectangular Subminiature, 90° End Entry, Overexpanded

NOTES 1. All dimensions are in $\frac{\text{inches}}{[\text{millimeters}]}$; $\frac{\text{ios}}{[\text{gms}]}$ inches lbs

2. Dimensions appearing in table are as follows:


a - As Supplied

b - After Unrestricted Recovery

Coating is optional. As supplied dimensions appearing in table are for uncoated parts. When coating is added, entry diameters will be reduced by .06 max.

Molding ports are optional. When -00 modification number is specified molding ports will be located as shown.

5. Weight shown in table of dimensions is based on polyolefin part.






TABLE OF DIMENSIONS													
PART NUMBER	Н		J		К		Р	R	s	W	Х	Weight	This Boot Fits
	Min	±5%	Min	±5%	Min	Max	±10%	±10%	±10%	±20%	±20%	Nom	Cannon-Cinch
	a	b	a	ь	a	ь	b	ь	ь	ь	ь	ь	
234A611	<u>.63</u> [16,0]	.80 [20,3]	<u>.63</u> [16,0]	<u>42</u> [10,7]	.63 [16,0]	.16 [4,1]	1.02 [25,9]	<u>.85</u> [21,6]	<u>.60</u> [15,2]	.04 [1,02]	.12 [3,05]	.0048 [2,18]	DE-9
234A621	.75 [19,1]	1.11 [28,2]	.75 [19,1]	.42 [10,7]	.75 [19,1]	.21 [5,3]	1.21 [30,7]	.97 [24,6]	.73 [18,5]	.04 [1,02]	.12 [3,05]	.0059 [2,68]	DA-15
234A632	1.15 [29,2]	1.66 [42,2]	1.15 [29,2]	. <u>42</u> [10,7]	1.15 [29,2]	.29 [7,4]	1.69 [42,9]	1.10 [27,9]	.87 [22,1]	.04 [1,02]	.12 [3,05]	.0102 [4,63]	DB-25
234A642	1.35 [34,3]	2.31 [58,7]	1.35 [34,3]	. <u>42</u> [10,7]	1.35 [34,3]	.34 [8,6]	2.10 [53,3]	1.20 [30.5]	1.00 [25,4]	.04 [1,02]	.12 [3,05]	.0 <u>132</u> [5,99]	DC-37
234A652	1.48 [37,6]	2.28 [57,9]	1.48 [37,6]	<u>.54</u> [13,7]	1.48 [37,6]	<u>.42</u> [10,7]	2.20 [55,9]	1.27 [32,3]	1.00 [25,4]	.04 [1,02]	.12 [3,05]	.0 <u>152</u> [6,90]	DD-50
234A661	.63 [16,0]	.80 [20,3]	.63 [16,0]	.42 [10,7]	.63 [16,0]	.15 [3,8]	1.02 [25,9]	.73 [18,5]	.48 [12,2]	.04 [1,02]	.12 [3,05]	. <u>0045</u> [2,04]	DE-9
234A671	.75 [19,1]	1.11 [28,2]	<u>.75</u> [19,1]	<u>.42</u> [10,7]	.75 [19,1]	.20 [5,1]	1.21 [30,7]	.78 [19,8]	.53 [13,5]	.04 [1,02]	.12 [3,05]	. <u>0056</u> [2,54]	DA-15

TUCO/Electronics/Reychem

Revision: J Date: 10/04/01 Part Number :

234A611 thru 671 Description :

Boot, Rectangular Subminiature, 90° End Entry, Overexpanded


Molded Parts Specification Control Drawing

Part Number: 234A611 thru 671 Description : Boot, Rectangular

Subminiature, 90° End Entry, Overexpanded

COMPATABILITY CHART									
MATERIAL DASH NO.	MATERIAL DESCRIPTION	RT SPEC	COATING SLASH NO.	COATING S NO.	COATING DESCRIPTION				
-3	Polyolefin, Semi-rigid	RT-301	/42; /86	S-1017;S-1048	Adhesive				
-4	Polyolefin, Flexible	RT-1304	/42; /86	S-1017;S-1048	Adhesive				
-8	Polyolefin, Space	RT-1308	N/A						
-25	Elastomer, Fluid Resistant	RT-1325	/86	S-1048	Adhesive				
-100	Polyolefin, Semi−flexible ZEROHAL™	RT-1323	/86	S-1048	Adhesive				

Date :

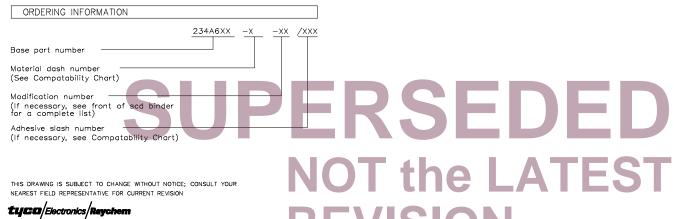

TYCO ELECTRONICS 307 CONSTITUTION DRIVE MENLO PARK, CALIFORNIA 94025

Boot, Rectangular Subminiature, 90° End Entry, Overexpanded

234A611 thru 671

CAD FILE MP01085

Description :

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for TE Connectivity manufacturer:

Other Similar products are found below:

D38999/24FJ4AN 570416-000 CLTEQ-M81CE-SSRELAY-4-20V 4-1195131-0 650069-000 SMD100-2 358838-000 CB-1022B-78

RM707012 RP410012 MMS42 1-640426-8 2EDL4CM DTS20W19-11PD-3028-LC RM202615 NC6-P104-06 MSPS103B DTS26F2141HE-LC DTS26F21-41AE DTS26F21-41PE-LC DTS26F21-11SE-3028-LC 30DCB6 1932144-1 293545-4 LVR125S MS27466T25F4PB

CKB-38-78010 TR04AI-TINELLOCKRING 1206SFF150F/63-2 D38999/20JB35HA TE1500A2R2J D38999/20WC8BB DTS24F19-11SC3028-LC D38999/24WG11HA D38999/24WG11HN MS27467T21F11H DJT16E21-11HA MS27467T21F35J MS27467T21F11J

MS27467T21F16H-LC MS27467T21F35H MS27467T21F41H-LC 1206SFH150F/24-2 RP330024 DJT16E21-11PA-LC DJT16E21-11HA
LC DJT16E21-11AA MS27467T21B11JA DJT16E21-11JA MS27467T21B11JA-LC