


## CUSTOMER DRAWING

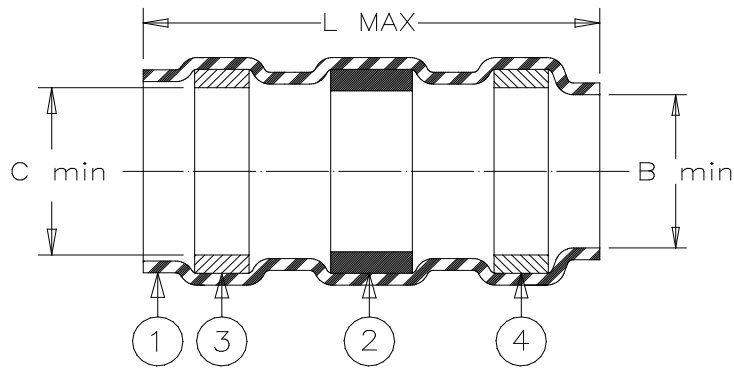

Part Name	Component Dimensions			Cable Dimensions				
	L max	B min	C min	E max	F min	G ±0.5(0.020)	H ±0.5(0.020)	D max
SLT-3X	17.3 (0.681)	2.7 (0.106)	3.1 (0.122)	3.1 (0.122)	1.4 (0.055)	7 (0.276)	6 (0.236)	2.7 (0.106)
SLT-5X	17.3 (0.681)	4.4 (0.173)	5.0 (0.197)	5.0 (0.197)	2.5 (0.098)	7 (0.276)	6 (0.236)	4.4 (0.173)
SLT-6X	20.0 (0.787)	5.9 (0.232)	6.4 (0.252)	6.4 (0.252)	3.2 (0.126)	7 (0.276)	6 (0.236)	5.9 (0.232)
SLT-7X	20.0 (0.787)	7.1 (0.280)	7.6 (0.299)	7.6 (0.299)	4.1 (0.161)	7 (0.276)	6 (0.236)	7.1 (0.280)
SLT-12X	31.5 (1.240)	10.8 (0.425)	11.6 (0.457)	11.6 (0.457)	7.3 (0.287)	9.5 (0.374)	8.5 (0.335)	10.8 (0.425)
SLT-14X	31.2 (1.228)	13.3 (0.524)	13.8 (0.543)	13.3 (0.524)	8.1 (0.319)	7 (0.276)	6 (0.236)	8.9 (0.350)


### MATERIAL

- INSULATION SLEEVE: Heat-shrinkable, radiation cross-linked modified polyvinylidene fluoride. Transparent clear.
- SOLDER PREFORM WITH FLUX:  
SOLDER: TYPE Cd18 per ANSI J-STD-006.  
FLUX: TYPE ROL0 per ANSI J-STD-004. Color: Violet.
- MELTABLE SEALING RING: Thermally stabilized thermoplastic. Color: Blue.
- MELTABLE SEALING RING: Thermally stabilized thermoplastic. Color: Clear.

### APPLICATION

- This controlled soldering device is designed for termination of a tin or silver plated copper shield on a cable having an insulation rated for at least +105°C.
- Temperature range: -55°C to +125°C.
- For application tooling contact your local Raychem technical service.

For best results, prepare the cable as shown:

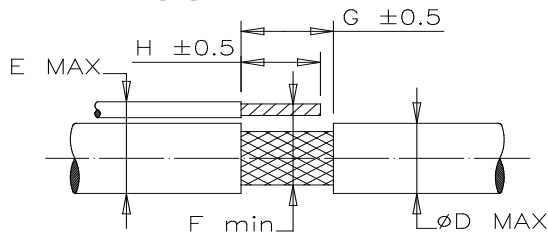

TE Connectivity, TE connectivity (logo), Raychem, and SolderSleeve are trademarks

		<b>Raychem</b> Devices	<b>TITLE: SOLDERSLEEVE DEVICE SHIELD TERMINATION LOW TEMPERATURE</b>			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE IN BETWEEN BRACKETS.			<b>DOCUMENT NO.: SLT-YX/1YX</b>			
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A  ROUGHNESS IN MICRON	TE Connectivity reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.	Revision: A2		Issue Date: March 2020	
DRAWN BY: R. MAPALO	DATE: 07-06-98	ECO: ECO-20-003568	SCALE: NONE	SIZE: A	SHEET: 1 of 1	

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Solder & Shield Tubing](#) category:*

*Click to view products by [TE Connectivity](#) manufacturer:*

Other Similar products are found below :

[CTC-0062-20-9/5-9](#) [CTC-0062-22-9/5-9](#) [650076N001](#) [680441-000](#) [D-150-0331CS2902](#) [D-181-1222-90/9CS2800](#) [D-300-01CS1108](#) [982127-1](#) [D-436-0127CS391](#) [D-436-0182CS246](#) [D-436-37CS2651](#) [D-436-58CS246](#) [D-436-61CS246](#) [D-436-82-CS2621](#) [D-659-0087](#) [D-750-0005CS2493](#) [E53797N001](#) [S200-2-01](#) [S200-4-00CS2904](#) [LSS-81-16AA-CS5575](#) [SO63-2-9036-22CS2677](#) [SO63-3-01CS293](#) [SO63-3-9036-20CS2677](#) [SO63-3-9036-22CS2677](#) [SO63-4-9036-20CS2677](#) [SO63-5-9036-22CS2677](#) [CC1525-000](#) [CTA-0025](#) [CTA-0025CS072](#) [D-108-01CS227](#) [D-108-07CS436](#) [D-128-0010](#) [D-141-0108CS404](#) [D-142-51-202-7754](#) [D-144-41CS1371](#) [D-150-0231-NRCS2896](#) [B-801-18-01](#) [B-801-58](#) [515-9](#) [C67137-000](#) [D-436-36CS2908](#) [D-436-37CS2908](#) [D-436-52CS246](#) [D-436-83CS2705](#) [D-438-0102](#) [LSS-26-8A](#) [427243-000](#) [D-106-2012](#) [D-300-08CS1108](#) [UWCS-2U/7.6-1C/5.8](#)