

# SPECIFICATION CONTROL DRAWING


55A1811

TITLE ONE CONDUCTOR CABLE, RADIATION-CROSSLINKED, MODIFIED ETFE INSULATED, SHIELDED, JACKETED, NORMAL WEIGHT, 600 VOLT

Date 09-20-01

Revision F

This specification sheet forms a part of the latest issue of Raychem Specification 55A.

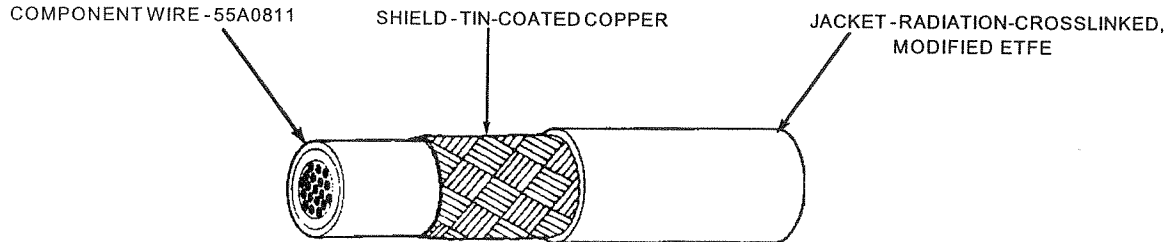

CABLE CONSTRUCTION DETAILS							
PARTNUMBER	CONDUCTOR SIZE (AWG)	SHIELD SIZE (AWG)	JACKET THICKNESS (inches)		OUTSIDE DIAMETER (inches)		MAXIMUM WEIGHT (lbs/1000 ft.)
			MINIMUM	NOMINAL	NOMINAL	MAXIMUM	
55A1811-30-*	30	38	.006	.008	.065	.070	4.0
55A1811-28-*	28	38	.006	.008	.068	.073	4.5
55A1811-26-*	26	38	.006	.008	.073	.078	5.3
55A1811-24-*	24	38	.006	.008	.078	.083	6.3
55A1811-22-*	22	38	.006	.008	.084	.089	7.9
55A1811-20-*	20	38	.006	.008	.092	.097	10.0
55A1811-18-*	18	38	.006	.008	.103	.109	13.3
55A1811-16-*	16	38	.006	.008	.111	.117	16.0
55A1811-14-*	14	38	.006	.008	.128	.134	22.2
55A1811-12-*	12	38	.006	.008	.145	.151	30.3
55A1811-10-*	10	38	.006	.008	.168	.176	45.0
55A1811- 8-*	8	38	.007	.009	.229	.250	76.6
55A1811- 6-*	6	38	.007	.009	.275	.286	115.
55A1811- 4-*	4	36	.008	.010	.350	.368	181.
55A1811- 2-*	2	34	.009	.011	.456	.479	297.
55A1811- 1-*	1	34	.009	.011	.518	.544	380.
55A1811- 0-*	0	34	.010	.012	.560	.588	444.
55A1811- 00-*	00	34	.010	.012	.620	.651	568.
55A1811-000-*	000	34	.012	.014	.664	.697	672.

### CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 150°C  
 Maximum continuous conductor temperature  
 VOLTAGE RATING: 600 volts (rms)  
 ACCELERATED AGING: 300 ± 3°C for 7 hours  
 BLOCKING: 200 ± 3°C for 6 hours  
 DIELECTRIC WITHSTAND: 1500 volts (rms), 60 Hz  
 FLAMMABILITY: Procedure 1, 3 seconds (maximum);  
 3 in. (maximum); no flaming of facial tissue  
 JACKET COLOR: White preferred  
 JACKET ELONGATION AND TENSILE STRENGTH:  
 Elongation, 50% (minimum)  
 Tensile Strength, 5000 lbf/in<sup>2</sup> (minimum)  
 JACKET FLAWS:  
 Spark Test, 1000 volts (rms), 100% test  
 Impulse Dielectric Test, 6.0 kV (peak), 100% test

LIFE CYCLE: 200 ± 3°C for 168 hours  
 LOW TEMPERATURE-COLD BEND: -65 ± 2°C for 4 hours  
 SHIELD COVERAGE: 85% (minimum)  
 VOLTAGE WITHSTAND TEST (POST ENVIRONMENTAL):  
 1000 volts (rms), 60 Hz, 1 minute

PARTNUMBER:  
 The "\*" in the part numbers above shall be replaced by a color code designator with a dash separating the component wire color from the jacket color.  
 Example: AWG 20, white component wire; white jacket:  
 55A1811-20-9-9

NOTE: Nominal values are for information only.  
 Nominal values are not requirements.

COLORS AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681.

DIMENSIONS ARE IN INCHES, AND UNLESS OTHERWISE DESIGNATED ARE NOMINAL.

**Raychem**

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Hook-up Wire](#) category:*

*Click to view products by [TE Connectivity](#) manufacturer:*

Other Similar products are found below :

[8918-BRN-1000](#) [8920-DK-BLU-1000](#) [CR6328-000](#) [01776.38.01](#) [M22759/16-14-5-500FT](#) [7053-RED-1000](#) [7053-SLATE-1000](#) [F25935-000](#)  
[F60898-000](#) [8055](#) [81044/12-18-9CS3209](#) [82A0811-4-9-G110](#) [83004-ORG-1000](#) [83005-LT-BLU-1000](#) [83025-VIO-1000](#) [8523-RED-100](#)  
[8524-WHT-100](#) [8525-ORG-1000](#) [8530-BLK-1000](#) [8530-LT-BLU-100](#) [8538-009-1000](#) [8597-LT-BLU-100](#) [8898-BLK-100](#) [138498-000](#)  
[E76065-000](#) [EPD50886A-20-9](#) [BFWUL3239-24-PINK](#) [C2015A.12.04](#) [C2015A.12.05](#) [C2015A.12.08](#) [C2015A.12.10](#) [C2015A.12.19](#)  
[C2016A.12.05](#) [C2016A.12.07](#) [C2065A.12.02](#) [C77653-000](#) [220368-001](#) [8916-GRY-500](#) [8918-RED-100](#) [8919-DK-BLU-1000](#) [8919-YEL-100](#)  
[8920-YEL-100](#) [9242833001](#) [933205-000](#) [282257-000](#) [2841/7-YELLOW-1000](#) [2842/7-ORANGE-100](#) [2842/7-RED-1000](#) [2843/19-BLUE-100](#)  
[2843/1-YELLOW-100](#)