


SPECIFICATION CONTROL DRAWING

TITLE ONE CONDUCTOR CABLE, RADIATION-CROSSLINKED, MODIFIED ETFE INSULATED, SHIELDED, JACKETED, NORMAL WEIGHT, 600 VOLT

This specification sheet forms a part of the latest issue of Raychem Specification 55A.

Date 09-20-01
Revision F

55A1811

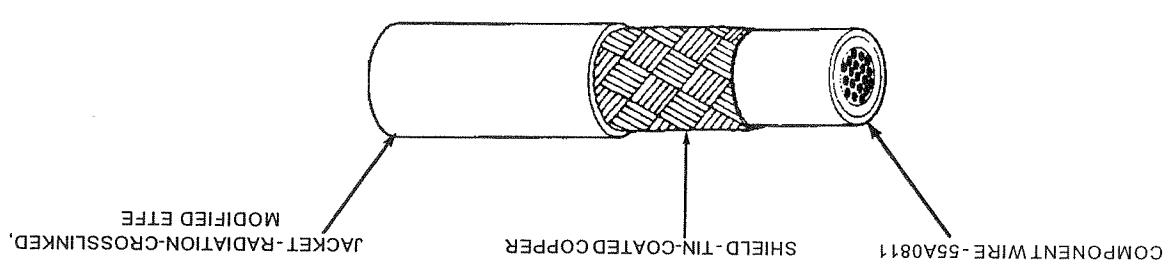

CABLE CONSTRUCTION DETAILS

PART NUMBER	CONDUCTOR SIZE (AWG)	SHIELD SIZE (AWG)	JACKET THICKNESS (inches)			OUTSIDE DIAMETER (inches)	MAXIMUM WEIGHT (lbs/1000 ft)
			MINIMUM	NOMINAL	NOMINAL		
55A1811-30*	38	38	.006	.008	.065	.070	4.0
55A1811-28*	38	38	.006	.008	.068	.073	4.5
55A1811-26*	38	38	.006	.008	.073	.078	5.3
55A1811-24*	38	38	.006	.008	.078	.083	6.3
55A1811-22*	38	38	.006	.008	.084	.089	7.9
55A1811-20*	38	38	.006	.008	.092	.097	10.0
55A1811-18*	38	38	.006	.008	.103	.109	13.3
55A1811-16*	38	38	.006	.008	.111	.117	16.0
55A1811-14*	38	38	.006	.008	.128	.134	22.2
55A1811-12*	38	38	.006	.008	.145	.151	30.3
55A1811-10*	38	38	.006	.008	.168	.176	45.0
55A1811-8*	38	38	.007	.009	.229	.250	76.6
55A1811-6*	38	38	.007	.009	.275	.286	115.
55A1811-4*	36	36	.008	.010	.350	.368	181.
55A1811-2*	34	34	.009	.011	.456	.479	297.
55A1811-1*	34	34	.009	.011	.518	.544	380.
55A1811-0*	34	34	.010	.012	.560	.588	444.
55A1811-00*	34	34	.010	.012	.620	.651	568.
55A1811-000*	34	34	.012	.014	.664	.697	672.

CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 150°C
 Maximum continuous conductor temperature
 VOLTAGE RATING: 600 volts (rms)
 ACCELERATED AGING: 300 ± 3°C for 7 hours
 BLOCKING: 200 ± 3°C for 6 hours
 DIELECTRIC WITHSTAND: 1500 volts (rms), 60 Hz
 FLAMMABILITY: Procedure 1, 3 seconds (maximum);
 3 in. (maximum); no flaming of facial tissue
 JACKET COLOR: White preferred
 JACKET ELONGATION AND TENSILE STRENGTH:
 Elongation, 50% (minimum)
 Tensile Strength, 5000 lbf/in² (minimum)
 JACKET FLAWS:
 Spark Test, 1000 volts (rms), 100% test
 Impulse Dielectric Test, 6.0 kV (peak), 100% test

NOTE: Nominal values are for information only.
 Nominal values are not requirements.

LIFE CYCLE: 200 ± 3°C for 168 hours
 LOW TEMPERATURE-COLD BEND: -65 ± 2°C for 4 hours
 SHIELD COVERAGE: 85% (minimum)
 VOLTAGE WITHSTAND TEST (POST ENVIRONMENTAL):
 1000 volts (rms), 60 Hz, 1 minute

PART NUMBER:
 The "****" in the part numbers above shall be replaced by
 a color code designator with a dash separating the
 component wire color from the jacket color.
 Example: AWG 20, white component wire; white jacket;
 55A1811-20-9-9



300 Constitution Drive, Menlo Park, California 94025
 1-800-2-Raychem Fax: 1-650-361-6297

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Hook-up Wire](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[002333-000](#) [M81044/12-22-6](#) [M81044/9-8-9](#) [743094-001](#) [81044/12-18-9CS3209](#) [8538-009-1000](#) [ATFC0311-20-5D](#) [EF5675-000](#)
[BFWUL3239-24-PINK](#) [22759/34-16-9CS2621](#) [22759/42-24-9CS2620](#) [933205-000](#) [284711-000](#) [961473-000](#) [30802-009-250](#) [99M0111-20-2](#)
[A00594-000](#) [190571-000](#) [22759/41-12-9CS2620](#) [22759/41-16-9CS2620](#) [22759/43-10-9CS2873](#) [265925-000](#) [CM9524-000](#) [31510-010-250](#)
[31514-009-500](#) [34401-010-250](#) [34402-010-500](#) [M81044/9-4-9](#) [391441-BK007](#) [400R0111-10-9](#) [431660-000](#) [ATFC0311-20-0](#) [44/7024-26-9-9](#)
[44A0112-22-9CS3184](#) [456157-000](#) [BFW-UL3239-24-WHITE](#) [55/0312-26-6L-CS2570](#) [55A0811-12-9](#) [55A6087-20-9-9-9](#) [55A6315-22-9-](#)
[9CS2632](#) [55A7400-22-9/96-9CS2275](#) [55A9002-30-5](#) [55PC0211-20-5CS2502](#) [55PC0811-6-9CS2637](#) [55PC1211-22-9-9CS3278](#) [C07683-000](#)
[32820-009-5000](#) [34020-008-2000](#) [391850-BK199](#) [392075-RD199](#)