

SPECIFICATION CONTROL DRAWING


55A1821

TITLE TWO CONDUCTOR CABLE, RADIATION-CROSSLINKED, MODIFIED ETFE INSULATED, SHIELDED, JACKETED, NORMAL WEIGHT, 600 VOLT

Date 4-27-93

Revision E

This specification sheet forms a part of the latest issue of Raychem Specification 55A.

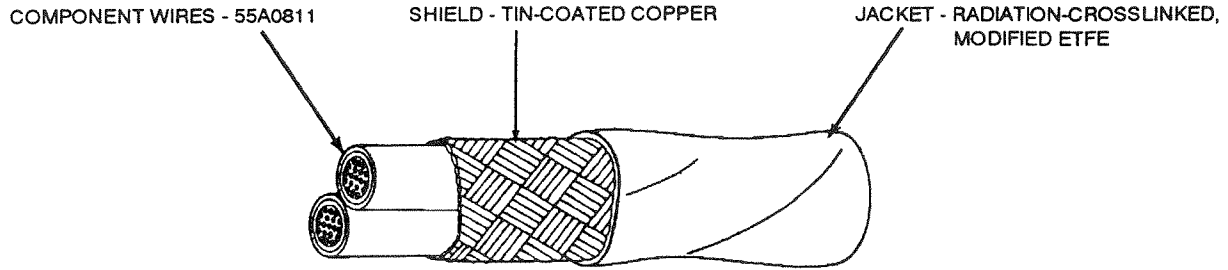

CABLE CONSTRUCTION DETAILS

PART NUMBER	CONDUCTOR SIZE (AWG)	SHIELD SIZE (AWG)	JACKET THICKNESS (inches)		OUTSIDE DIAMETER (inches)		MAXIMUM WEIGHT (lbs/1000 ft.)
			MINIMUM	NOMINAL	NOMINAL	MAXIMUM	
55A1821-26-*	26	38	.006	.008	.113	.119	9.6
55A1821-24-*	24	38	.006	.008	.123	.129	11.0
55A1821-22-*	22	38	.006	.008	.135	.141	13.9
55A1821-20-*	20	38	.006	.008	.151	.158	18.2
55A1821-18-*	18	38	.006	.008	.173	.180	24.5
55A1821-16-*	16	38	.006	.008	.189	.196	28.8
55A1821-14-*	14	38	.007	.009	.225	.233	41.4
55A1821-12-*	12	38	.007	.009	.259	.269	57.4
55A1821-10-*	10	38	.008	.010	.308	.323	85.7
55A1821- 8-*	8	36	.009	.011	.432	.454	163.
55A1821- 6-*	6	34	.010	.012	.532	.559	251.
55A1821- 4-*	4	34	.011	.015	.677	.711	385.
55A1821- 2-*	2	34	.012	.018	.879	.923	619.

CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 150°C

Maximum continuous conductor temperature

VOLTAGE RATING: 600 volts (rms)

ACCELERATED AGING: 300 ± 3°C for 7 hours

* BLOCKING: 200 ± 3°C for 6 hours

DIELECTRIC WITHSTAND: 1500 volts (rms), 60 Hz

FLAMMABILITY: Procedure 1, 3 seconds (maximum);

3 in. (maximum); no flaming of facial tissue

JACKET COLOR: White preferred

JACKET ELONGATION AND TENSILE STRENGTH:

Elongation, 50% (minimum)

Tensile Strength, 5000 lbf/in² (minimum)

JACKET FLAWS:

Spark Test, 1000 volts (rms), 60 Hz, 100% test

Impulse Dielectric Test, 6.0 kV (peak), 100% test

* LIFE CYCLE: 200 ± 3°C for 168 hours

LOW TEMPERATURE-COLD BEND: -65 ± 3°C for 4 hours

SHIELD COVERAGE: 85% (minimum)

VOLTAGE WITHSTAND TEST (POST ENVIRONMENTAL):

1000 volts (rms), 60 Hz, 1 minute

PART NUMBER:

The *** in the part numbers above shall be replaced

by color code designators with a slash separating

the component wire colors and a dash separating

the component wire colors from the jacket color.

Example: AWG 20, red and orange component wires; white jacket: 55A1821-20-2/3-9

* Qualification Test

NOTE: Nominal values are for information only.

Nominal values are not requirements.

COLORS AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-661.

DIMENSIONS ARE IN INCHES, AND UNLESS OTHERWISE DESIGNATED ARE NOMINAL.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[D38999/24FJ4AN](#) [570416-000](#) [CLTEQ-M81CE-SSRELAY-4-20V](#) [4-1195131-0](#) [650069-000](#) [SMD100-2](#) [358838-000](#) [CB-1022B-78](#)
[RM707012](#) [RP410012](#) [MMS42](#) [1-640426-8](#) [2EDL4CM](#) [DTS20W19-11PD-3028-LC](#) [RM202615](#) [NC6-P104-06](#) [MSPS103B](#) [DTS26F21-](#)
[41HE-LC](#) [DTS26F21-41AE](#) [DTS26F21-41PE-LC](#) [DTS26F21-11SE-3028-LC](#) [30DCB6](#) [1932144-1](#) [293545-4](#) [LVR125S](#) [MS27466T25F4PB](#)
[CKB-38-78010](#) [TR04AI-TINELLOCKRING](#) [1206SFF150F/63-2](#) [D38999/20JB35HA](#) [TE1500A2R2J](#) [D38999/20WC8BB](#) [DTS24F19-11SC-](#)
[3028-LC](#) [D38999/24WG11HA](#) [D38999/24WG11HN](#) [MS27467T21F11H](#) [DJT16E21-11HA](#) [MS27467T21F35J](#) [MS27467T21F11J](#)
[MS27467T21F16H-LC](#) [MS27467T21F35H](#) [MS27467T21F41H-LC](#) [1206SFH150F/24-2](#) [RP330024](#) [DJT16E21-11PA-LC](#) [DJT16E21-11HA-](#)
[LC](#) [DJT16E21-11AA](#) [MS27467T21B11JA](#) [DJT16E21-11JA](#) [MS27467T21B11JA-LC](#)