


SPECIFICATION CONTROL DRAWING

55A1821

TITLE
TWO CONDUCTOR CABLE, RADIATION-CROSSLINKED, MODIFIED ETFE INSULATED, SHIELDED, JACKETED, NORMAL WEIGHT, 600 VOLT

This specification sheet forms a part of the latest issue of Raychem Specification 55A.

COMPONENT WIRES - 55A0811
SHIELD - TIN-COATED COPPER
JACKET - RADIATION-CROSSLINKED, MODIFIED ETFE

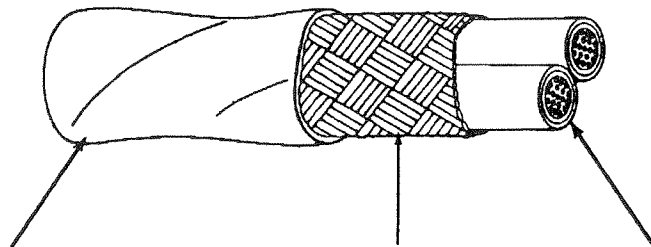

CABLE CONSTRUCTION DETAILS

PART NUMBER	CONDUCTOR SIZE (AWG)	SHIELD SIZE (AWG)	JACKET THICKNESS (inches)		OUTSIDE DIAMETER (inches)		MAXIMUM WEIGHT (lbs/1000 ft)
			MINIMUM	NOMINAL	NOMINAL	MAXIMUM	
55A1821-26*	26	38	.006	.008	.113	.119	9.6
55A1821-24*	24	38	.006	.008	.123	.129	11.0
55A1821-22*	22	38	.006	.008	.135	.141	13.9
55A1821-20*	20	38	.006	.008	.151	.158	18.2
55A1821-18*	18	38	.006	.008	.173	.180	24.5
55A1821-16*	16	38	.006	.008	.189	.196	28.8
55A1821-14*	14	38	.007	.009	.225	.233	41.4
55A1821-12*	12	38	.007	.009	.259	.269	57.4
55A1821-10*	10	38	.008	.010	.308	.323	85.7
55A1821-8*	8	36	.009	.011	.432	.454	163
55A1821-6*	6	34	.010	.012	.532	.559	251
55A1821-4*	4	34	.011	.015	.677	.711	385
55A1821-2*	2	34	.012	.018	.879	.923	619

CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 150°C
Maximum continuous conductor temperature
VOLTAGE RATING: 600 volts (rms)
ACCELERATED AGING: 300 ± 3°C for 7 hours
BLOCKING: 200 ± 3°C for 6 hours
DIELECTRIC WITHSTAND: 1500 volts (rms), 60 Hz
FLAMMABILITY: Procedure 1, 3 seconds (maximum); 3 in. (maximum) of facial tissue
JACKET COLOR: White preferred
JACKET ELONGATION AND TENSILE STRENGTH:
Elongation, 50% (minimum)
Tensile Strength, 5000 lbf/in² (minimum)
JACKET FLAWS:
Spark Test, 1000 volts (rms), 60 Hz, 100% test
Impulse Dielectric Test, 6.0 kV (peak), 100% test

NOTE: Nominal values are for information only.
Nominal values are not requirements.

* LIFE CYCLE: 200 ± 3°C for 168 hours
LOW TEMPERATURE-COLD BEND: -65 ± 3°C for 4 hours
SHIELD COVERAGE: 85% (minimum)
VOLTAGE WITHSTAND TEST (POST ENVIRONMENTAL):
1000 volts (rms), 60 Hz, 1 minute

PART NUMBER: The "*" in the part numbers above shall be replaced by color code designators with a slash separating the component wire colors and a dash separating the component wire colors from the jacket color.
Example: AWG 20, red and orange component wires; white jacket: 55A1821-20-2/3-9

* Qualification Test

COLORS AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681.

DIMENSIONS ARE IN INCHES, AND UNLESS OTHERWISE DESIGNATED ARE NOMINAL.

THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN, REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

Raychem

Raychem Corporation
300 Constitution Drive, Menlo Park, California 94025
415) 361 3333 TWX 910 373 1728

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Multi-Conductor Cables](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[89182-010-1000](#) [89705-008-500](#) [6000FE-877-1000](#) [CS2885-000](#) [M27500-20SP2S23](#) [6300FE-877-U1000](#) [6309UE-877-1000](#) [M3905-BK005](#)
[6502FE 8771000](#) [6541PA-008-U1000](#) [CV6807-000](#) [CW9530-000](#) [CX6543-000](#) [CXA-0066-20-4-9CS2973](#) [CXA-0078-16-1-9CS2405](#) [CXA-](#)
[0078-22-4-9CS2405](#) [CXA-0078-24-4-9CS2405](#) [CXA-0140-16-6/9-9CS2405](#) [CY0660-000](#) [720451-000](#) [752687-000](#) [768146-000](#) [773159-000](#)
[82841-877-5000](#) [83318E-009-500](#) [8348-060-500](#) [83559-002-1000](#) [83653-002-5000](#) [83659-002-1000](#) [83709-002-1000](#) [8404-060-500](#) [8469](#)
[060100](#) [858171-000](#) [8628-060-500](#) [868361-001](#) [8730-060-1000](#) [8737-060-U1000](#) [8747-060-100](#) [8747-060-1000](#) [8769-060-1000](#) [8775-060-](#)
[500](#) [877541-000](#) [8780-060-1000](#) [8782-001-U1000](#) [88444-002-1000](#) [9159-060-500](#) [939870-000](#) [9423 060U500](#) [9444 060U1000](#) [9497](#)
[0001000](#)