


# SPECIFICATION CONTROL DRAWING

**55A7237**

|       |   |      |        |          |   |
|-------|---|------|--------|----------|---|
| TITLE | TWO CONDUCTOR CABLE, SHIELDED, JACKETED,<br>GENERAL PURPOSE, 600 VOLT | Date | 4-8-06 | Revision | A |
|-------|---|------|--------|----------|---|

This specification sheet forms a part of the latest issue of Raychem Specification 55A.

COMPONENT WIRES - 55A0213      SHIELD - TIN-COATED COPPER      JACKET - RADIATION-CROSSLINKED,  
MODIFIED ETFE

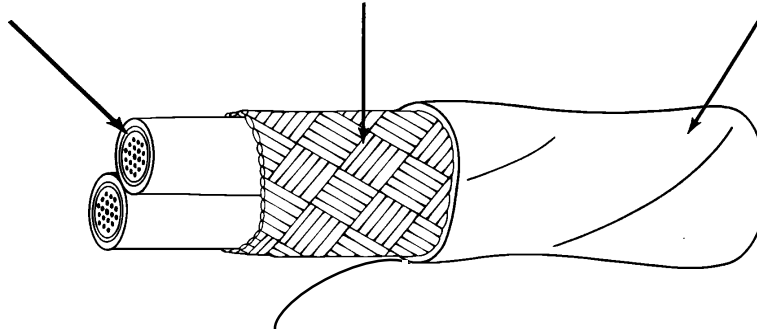

FILAMENT STRIPPING THREAD - NOMEX®, 200/1/4E, No finish

### CABLE CONSTRUCTION DETAILS

| PART NUMBER<br><u>1/</u> | CONDUCTOR<br>SIZE<br>(AWG) | SHIELD<br>SIZE<br>(AWG) | JACKET THICKNESS<br>(inches) |         | OUTSIDE DIAMETER<br>(inches) |         | MAXIMUM<br>WEIGHT<br>(lb/1000 ft.) |
|--------------------------|----------------------------|-------------------------|------------------------------|---------|------------------------------|---------|------------------------------------|
|                          |                            |                         | MINIMUM                      | NOMINAL | NOMINAL                      | MAXIMUM |                                    |
| 55A7237-22-*             | 22                         | 38                      | .006                         | .008    | .127                         | .133    | 13.3                               |
| 55A7237-20-*             | 20                         | 38                      | .006                         | .008    | .143                         | .150    | 17.6                               |
| 55A7237-18-*             | 18                         | 38                      | .006                         | .008    | .165                         | .173    | 23.9                               |
| 55A7237-16-*             | 16                         | 38                      | .006                         | .008    | .179                         | .188    | 28.5                               |
| 55A7237-14-*             | 14                         | 38                      | .006                         | .008    | .209                         | .219    | 40.2                               |
| 55A7237-12-*             | 12                         | 38                      | .007                         | .009    | .247                         | .259    | 57.7                               |

### CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 150°C  
Maximum continuous conductor temperature  
VOLTAGE RATING: 600 volts (rms)  
ACCELERATED AGING: 300 ± 3°C for 7 hours  
BLOCKING: 200 ± 3°C for 6 hours  
DIELECTRIC WITHSTAND: 1500 volts (rms), 60 Hz  
FLAMMABILITY:  
Procedure 1, 3 seconds (maximum); 3 in. (maximum);  
no flaming of facial tissue  
JACKET COLOR: White preferred  
JACKET ELONGATION AND TENSILE STRENGTH:  
Elongation, 50% (minimum)  
Tensile Strength, 5000 lbf/in<sup>2</sup> (minimum)  
JACKET FLAWS:  
Spark Test, 1000 volts (rms)  
Impulse Dielectric Test, 6.0 kV (peak)

LIFE CYCLE: 200 ± 3°C for 168 hours  
LOW TEMPERATURE-COLD BEND: -65 ± 3°C for 4 hours  
SHIELD COVERAGE: 85% (minimum)  
VOLTAGE WITHSTAND TEST: (POST ENVIRONMENTAL)  
1000 volts (rms), 60 Hz, 1 minute

PARTNUMBER:  
The "\*" in the part numbers above shall be replaced  
by color code designators with a slash separating the  
component wire colors and a dash separating  
the component wires color from the jacket color.  
Example: AWG 20, black and white component wires;  
white jacket: 55A7237-20-0/9-9

NOTE: Nominal values are for information only.  
Nominal values are not requirements.

NOMEX® is a registered trademark of E.I. du Pont de Nemours and Company.

*Users should evaluate the suitability of this product for their application. Specifications are subject to change without notice. Tyco Electronics also reserves the right to make changes in materials or processing, which do not affect compliance with any specification, without notification to Buyer.*

1/ COLORS AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681. HOWEVER, DUE TO LENGTH LIMITATIONS OF THE RAYCHEM PART NUMBER, AN ALTERNATIVE COLOR CODE MAY REPLACE MIL-STD-681 COLOR CODE DESIGNATORS. (EXAMPLE: "901/902..." MAY BE REPLACED BY "Axxx".) OTHER CODES AND SUFFIXES MAY BE ADDED TO THE PART NUMBER, AS NECESSARY, TO CAPTURE ANY ADDITIONAL REQUIREMENTS IMPOSED BY THE PURCHASE ORDER.

DIMENSIONS ARE IN INCHES, AND UNLESS OTHERWISE DESIGNATED ARE NOMINAL.

THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.  
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.



**Raychem** Wire & Cable  
501 Oakside Avenue  
Redwood City, CA 94063-3800  
Phone: 1-800-227-8816  
Fax: 1-650-361-6297

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Multi-Conductor Cables](#) category:*

*Click to view products by [TE Connectivity](#) manufacturer:*

Other Similar products are found below :

[89182-010-1000](#) [89705-008-500](#) [89842-002-1000](#) [6000FE-877-1000](#) [6120UL-002-1000](#) [CS2885-000](#) [M27500-20SP2S23](#) [6300FE-877-U1000](#) [6309UE-877-1000](#) [M3905-BK005](#) [6502FE 8771000](#) [6541PA-008-U1000](#) [CV6807-000](#) [CW9530-000](#) [CX6543-000](#) [CXA-0066-20-4-9CS2973](#) [CXA-0078-16-1-9CS2405](#) [CXA-0078-22-4-9CS2405](#) [CXA-0078-24-4-9CS2405](#) [CXA-0140-16-6/9-9CS2405](#) [CY0660-000](#) [720451-000](#) [752687-000](#) [768146-000](#) [773159-000](#) [82841-877-5000](#) [83318E-009-500](#) [8348-060-500](#) [83559-002-1000](#) [83653-002-5000](#) [83659-002-1000](#) [83709-002-1000](#) [8404-060-500](#) [8469 060100](#) [858171-000](#) [8628-060-500](#) [868361-001](#) [8730-060-1000](#) [8737-060-U1000](#) [8747-060-100](#) [8747-060-1000](#) [8769-060-1000](#) [8775-060-500](#) [8780-060-1000](#) [8782-001-U1000](#) [88444-002-1000](#) [9159-060-500](#) [9318-060-1000](#) [939870-000](#) [9423 060U500](#)