

# SPECIFICATION CONTROL DRAWING

55PC2123

TITLE

TWO CONDUCTOR CABLE, FLAT BRAID SHIELDED, JACKETED, 600 VOLT


Date

5-28-99

Revision

A

This specification sheet forms a part of the latest issue of Raychem Specification 55PC.

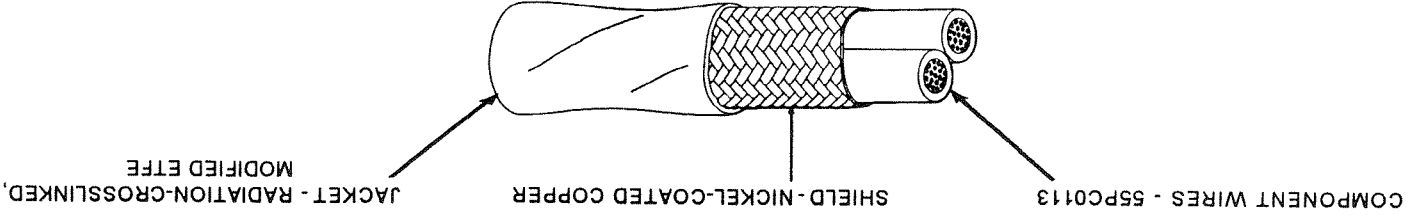

## CONSTRUCTION DETAILS

PART NUMBER	CONDUCTOR SIZE (AWG)	SHIELD STRAND THICKNESS (± .0004)	JACKET THICKNESS (in.)		DIAMETER (in.)		WEIGHT (lbs/1000 ft.)
			LOWER SPEC LIMIT	TARGET WALL	LOWER SPEC LIMIT	TARGET VALUE	
55PC2123-26*	26	.0015	.0060	.0075	.078	.083	4.96
55PC2123-24*	24	.0015	.0060	.0075	.088	.093	6.95
55PC2123-22*	22	.0015	.0060	.0075	.105	.109	9.20
55PC2123-20*	20	.0015	.0060	.0080	.117	.122	12.86
55PC2123-18*	18	.0015	.0060	.0080	.136	.141	18.09
55PC2123-16*	16	.0015	.0060	.0080	.150	.156	22.25
55PC2123-14*	14	.0015	.0065	.0085	.180	.186	32.62
55PC2123-12*	12	.0015	.0070	.0090	.218	.225	48.31
55PC2123-10*	10	.0015	.0075	.0095	.270	.278	74.50

## CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 200°C  
 Maximum continuous conductor temperature  
 VOLTAGE RATING: 600 volts (rms)  
 CROSSLINK VERIFICATION: 300 ± 3°C for 1 hour  
 DIELECTRIC WITHSTAND: 1500 volts (rms), 60 HZ  
 JACKET COLOR: White preferred  
 JACKET ELONGATION AND TENSILE STRENGTH:  
 Elongation, 50% (minimum)  
 Tensile Strength, 5000 lbf/in<sup>2</sup> (minimum)  
 JACKET FLAWS:  
 Spark Test, 1000 volts (rms), 60 HZ, 100% test  
 Impulse Dielectric Test, 6.0 KV (peak), 100% test

The "\*" in the part numbers above shall be replaced by color code designators with a slash separating the component wire colors and a dash separating the component wire colors from the jacket color.  
 Example: AWG 22, red and blue component wires; white jacket: 55PC2123-22-2/6-9

PART NUMBER:  
 SHIELD COVERAGE: 85% (minimum)  
 VOLTAGE WITHSTAND TEST (POST ENVIRONMENTAL):  
 1000 volts (rms), 60 HZ, 1 minute

COLOR AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-881.

THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

**Raychem**

Raychem Corporation  
 300 Constitution Drive, Menlo Park, California 94025  
 1-800-2-Raychem Fax: 1-650-381-825

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Multi-Conductor Cables](#) category:*

*Click to view products by [TE Connectivity](#) manufacturer:*

Other Similar products are found below :

[89182-010-1000](#) [89705-008-500](#) [6000FE-877-1000](#) [CS2885-000](#) [M27500-20SP2S23](#) [6300FE-877-U1000](#) [6309UE-877-1000](#) [M3905-BK005](#)  
[6502FE 8771000](#) [6541PA-008-U1000](#) [CV6807-000](#) [CW9530-000](#) [CX6543-000](#) [CXA-0066-20-4-9CS2973](#) [CXA-0078-16-1-9CS2405](#) [CXA-](#)  
[0078-22-4-9CS2405](#) [CXA-0078-24-4-9CS2405](#) [CXA-0140-16-6/9-9CS2405](#) [CY0660-000](#) [720451-000](#) [752687-000](#) [768146-000](#) [773159-000](#)  
[82841-877-5000](#) [83318E-009-500](#) [8348-060-500](#) [83559-002-1000](#) [83653-002-5000](#) [83659-002-1000](#) [83709-002-1000](#) [8404-060-500](#) [8469](#)  
[060100](#) [858171-000](#) [8628-060-500](#) [868361-001](#) [8730-060-1000](#) [8737-060-U1000](#) [8747-060-100](#) [8747-060-1000](#) [8769-060-1000](#) [8775-060-](#)  
[500](#) [877541-000](#) [8780-060-1000](#) [8782-001-U1000](#) [88444-002-1000](#) [9159-060-500](#) [939870-000](#) [9423 060U500](#) [9444 060U1000](#) [9497](#)  
[0001000](#)