


SPECIFICATION CONTROL DRAWING

55A6052

THREE CONDUCTOR CABLE, MODIFIED ETFE INSULATED, SHIELDED, JACKETED, NORMAL WEIGHT, 600 VOLT

This specification sheet forms a part of the latest issue of Raychem Specification 55A.

Date: 6-11-99
Revision: C

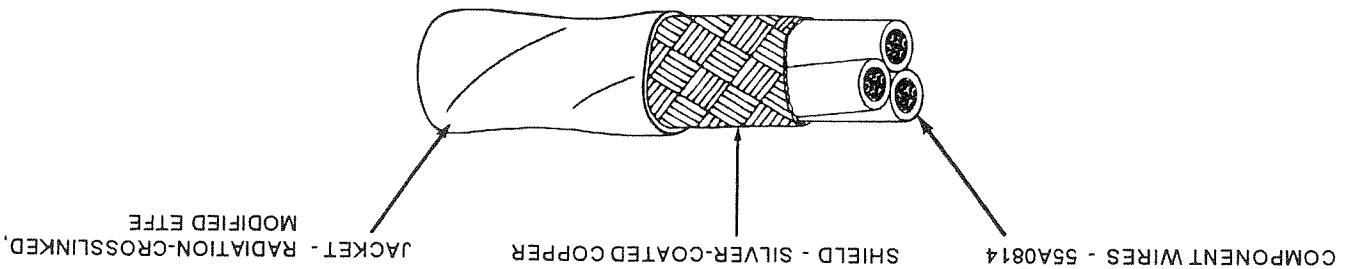

PART NUMBER	CONDUCTOR SIZE (AWG)	SHIELD SIZE (AWG)	JACKET THICKNESS (inch)		OUTSIDE DIAMETER (inch)		MAXIMUM WEIGHT (lbs/1000 ft.)
			MINIMUM	NOMINAL	NOMINAL	MAXIMUM	
55A6052-26**	26	38	.006	.008	.119	.125	12.1
55A6052-24**	24	38	.006	.008	.130	.136	14.4
55A6052-22**	22	38	.006	.008	.143	.149	18.5
55A6052-20**	20	38	.006	.008	.160	.167	24.7

CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 200°C
 Maximum continuous conductor temperature
 VOLTAGE RATING: 600 volts (rms)
 ACCELERATED AGING: 300 ± 3°C for 7 hours
 BLOCKING: 200 ± 3°C for 6 hours
 DIELECTRIC WITHSTAND: 1500 volts (rms), 60 Hz
 FLAMMABILITY: Procedure 1, 3 seconds (maximum);
 3 in. (maximum); no flaming of facial tissue
 JACKET COLOR: White preferred
 JACKET ELONGATION AND TENSILE STRENGTH:
 Elongation, 50% (minimum)
 Tensile Strength, 5000 lbf/in² (minimum)
 JACKET FLAWS:
 Spark Test, 1000 volts (rms), 60 Hz, 100% test
 Impulse Dielectric Test, 6.0 kV (peak), 100% test

NOTE: Nominal values are for information only.
 Nominal values are not requirements.

TEMPERATURE RATING: 200°C
 LIFE CYCLE: 230 ± 3°C for 500 hours
 LOW TEMPERATURE-COLD BEND: -65 ± 2°C for 4 hours
 SHIELD COVERAGE: 85% (minimum)
 VOLTAGE WITHSTAND TEST (POST ENVIRONMENTAL):
 1000 volts (rms), 60 Hz, 1 minute

PART NUMBER:
 The "*" in the part numbers above shall be replaced
 by a color code designator with a slash separating
 the component wire colors and a dash separating
 the component wire colors from the jacket color.
 Example: AWG 20, white, black and red component
 wires; white jacket: 55A6052-20-9/0/2-9

COLORS AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681.

DIMENSIONS ARE IN INCHES, AND UNLESS OTHERWISE DESIGNATED ARE NOMINAL.

THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.



Raychem Corporation
 300 Constitution Drive, Menlo Park, California 94025
 1-800-2-Raychem Fax: 1-650-361-6297

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Multi-Conductor Cables](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[89182-010-1000](#) [6000FE-877-1000](#) [M27500-20SP2S23](#) [6300FE-877-U1000](#) [6309UE-877-1000](#) [6502FE 8771000](#) [6541PA-008-U1000](#)
[CV6807-000](#) [CW9530-000](#) [CX6543-000](#) [CXA-0066-20-4-9CS2973](#) [CXA-0078-16-1-9CS2405](#) [CXA-0078-22-4-9CS2405](#) [CXA-0078-24-4-9CS2405](#) [CXA-0140-16-6/9-9CS2405](#) [CY0660-000](#) [720451-000](#) [752687-000](#) [82841-877-5000](#) [8348-060-500](#) [83559-002-1000](#) [83653-002-5000](#) [83659-002-1000](#) [83709-002-1000](#) [8404-060-500](#) [8469 060100](#) [8628-060-500](#) [868361-001](#) [8730-060-1000](#) [8737-060-U1000](#) [8747-060-100](#) [8747-060-1000](#) [8769-060-1000](#) [8775-060-500](#) [877541-000](#) [8780-060-1000](#) [88444-002-1000](#) [9159-060-500](#) [939870-000](#) [9423 060U500](#) [9444 060U1000](#) [9497 0001000](#) [9515-060-1000](#) [9520-060-1000](#) [9524-060-1000](#) [9546-060-500](#) [9572-002-U500](#) [9774-060-1000](#) [1213F-D15-A1000](#) [1213F-009-A1000](#)