
SEFM150.00

APP'D./DATE ECN\* 10887 TAM 10/6/94 0 SAFETY ORGANIZATION(S): ECO-09-026495 AEG 11DEC09 THIS FILTER HAS BEEN FORMALLY RECOGNIZED, CERTIFIED OR APPROVED BY THE LISTED AGENCY. THEREFORE, ALL TEST/REQUIREMENTS SPECIFIED RELIABILITY SPECIFICATIONS. IN THE LATEST REVISION OF THE FOLLOWING AGENCY STANDARDS STORAGE TEMPERATURE. -40°C TO +85°C STORAGE TEMPERATURE: HAVE BEEN MET: 21 DAYS # 40°C 95% RH HUMIDITY: CURRENT OVERLOAD TEST: TEST SPECIFICATIONS: 6 TIMES RATED CURRENT UL RECOGNIZED UL 1283 FOR 8 SECONDS CSA CERTIFIED CSA 22.2, NO.0, 0.4, 8 INDUCTANCE: VDE APPROVED VDE 565-3, 625 CAPACITANCE: (MEASURED # 1 KHz, 0.25 VAC MAX., 25°C ±1°C) .005µF ±20% 5 AMP., 120 VAC 4 AMP., 250 VAC OPERATING SPECIFICATIONS: LINE TO LINE: .01µF ±20% LINE VOLTAGE/CURRENT: DISCHARGE RESISTOR: 1.5 Mp 4 AMP./40°C, 250 VAC LINE/GROUND AND LINE/LINE 6000 Mm (MIN) AT 100 VDC LINE FREQUENCY: 50-60Hz INSULATION RESISTANCE 20°C AND 50% RH MAX. LEAKAGE CURRENT, EACH (W/O DISCHARGE RESISTOR) .25mA @ 120V 60Hz .42mA @ 250V 50Hz RECOMMENDED RECEIVING INSPECTION HIPOT: LINE TO GROUND -10°C TO +40°C @ RATED CURRENT, I LINES TO GROUND: 1500 VAC FOR 1 MINUTE OPERATING AMBIENT TEMP. RANGE: 1450 VDC FOR 1 MINUTE LINE TO LINE: IN AN AMBIENT, Ta, HIGHER THAN 40°C, THE MAXIMUM OPERATING FILTER APPROVAL: CURRENT, L, IS AS FOLLOWS: THE BEST WAY TO SELECT AND QUALIFY A FILTER IS FOR YOUR ENGINEERING TO TEST THE UNIT IN YOUR EQUIPMENT.

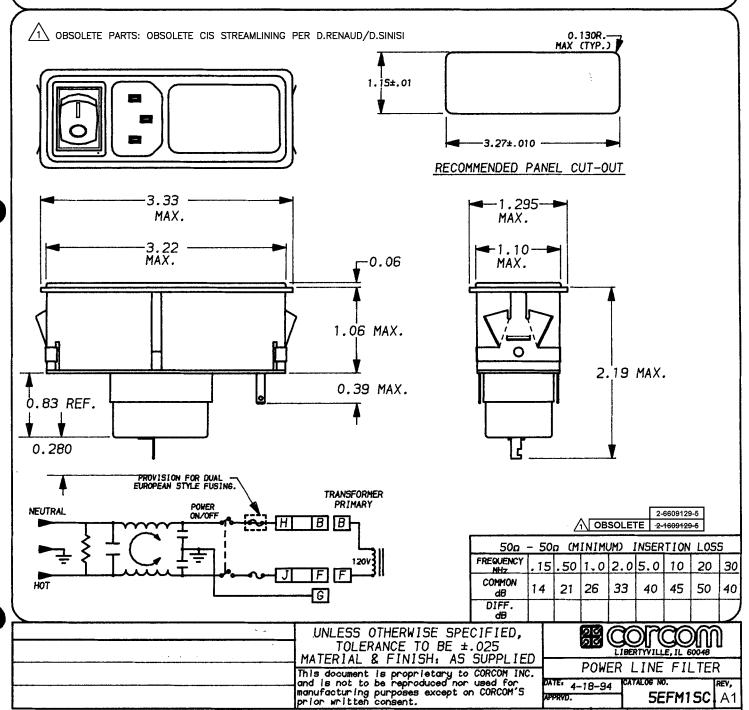

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for AC Power Entry Modules category:

Click to view products by TE Connectivity manufacturer:

Other Similar products are found below:

0098.0050 6167.0002 6609100-2 7-6609955-2 FKI2-50-6/M5 FN361-6-06 FN389-4-22 FN9226B-6-02 FN9233S1-10-06 FN9233S1-8-06 FN9233S1B-8-06 FN9233S1R-12-06 FN9233SB-12-06 FN9233SB-12-06 FN9233SB-8-06 FN9233SR-10-06 FN9244B-15-06HI FN9244EB-3-06 FN9244EB-8-06 FN9244ER-15-06 FN9244ER-8-06 FN9244ES1-8-06 FN9244ESB-8-06 FN9244ES-8-06 FN9244ESB-8-06 FN924ESB-8-06 FN924ESB-