

### Elektrische Werte

Bemessungsstrom	max. 14 A*
Durchgangswiderstand	< 5 mOhm

### Werkstoff

Kontakt	Messing, vergoldet
---------	--------------------

### Anschluss



Anschlussart/-bereich	Crimp/ 0,5 - 1,5 mm <sup>2</sup>
max. Litzenaußendurchmesser	ø2,9 mm
Abisolierlänge	5 mm
Crimpeinstellungen	sind individuell zu wählen

### Mechanische Werte

Steckzyklen	500
-------------	-----

### Werkzeuge (nicht im Lieferumfang enthalten)

digitale Crimpzange	TE Teile Nr.: C0-0235-000-000 IC Ref. Nr.: C0.235.00
analoge Crimpzange	TE Teile Nr.: C0-0201-000-000 IC Ref. Nr.: C0.201.00
(Positioniereinsatz für 1 mm Kontakte)	TE Teile Nr.: C0-0121-000-000 IC Ref. Nr.: C0.121.00)

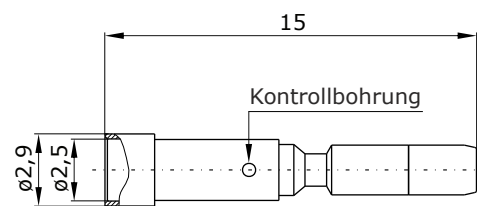

### Hauptabmessungen

Kontaktbuchse





# Contact Socket 1 mm

wire spring contact

for: - 917

**TE part number: 60-0159-011-000**  
**IC reference number: 60.159.11**

## Electrical Data

rated current max. 14 A\*  
contact resistance < 5 mOhm

## Material

contact brass, gold plated

## Termination

cross-section crimp/ 0.5 - 1.5 mm<sup>2</sup>  
max. outer wire diameter ø2.9 mm  
stripping length 5 mm  
crimp settings select individually

## Mechanical Data


mating cycles 500

## Tools (not part of product contents)

digitale crimping tool TE part no.: C0-0235-000-000  
IC reference no.: C0.235.00

analog crimping tool TE part no.: C0-0201-000-000  
IC reference no.: C0.201.00

(positioner for 1 mm contacts) TE part no.: C0-0121-000-000  
IC reference no.: C0.121.00

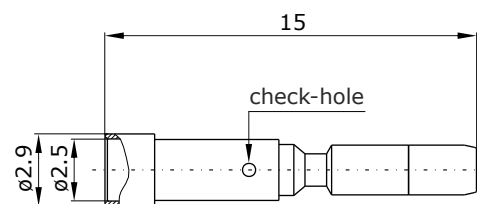

## Main Dimensions

contact socket

Y6-B109-000-0EN issued: 03.05.2010/Ra; modified: 17.10.2018/KC

© 2018 TE Connectivity

TE Connectivity, TE connectivity (logo), intercontec (logo) and speedtec are trademarks.

While TE Connectivity (TE) has made every reasonable effort to ensure the accuracy of the information in this presentation, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this article are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.

TE Connectivity Industrial GmbH  
Bernrieder Straße 15  
94559 Niederwinkling, Germany  
+49 9962 2002 - 0  
[intercontec@te.com](mailto:intercontec@te.com)  
[www.intercontec.biz](http://www.intercontec.biz)



\* for max. wire cross-section

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Circular Metric Connectors](#) category:*

*Click to view products by [TE CONNECTIVITY](#) manufacturer:*

Other Similar products are found below :

[600X518037X](#) [6STD15PCR99B70A](#) [8R4000A16M020](#) [8R5000A16M005](#) [1200910002](#) [1203580030](#) [1200910008](#) [1200910011](#) [1300140094](#)  
[130203-0054](#) [1300140026](#) [1300150099](#) [RF-12S1N8A90DU](#) [1-3637-600-5205](#) [1612618](#) [21036836414](#) [8R4006A16M010](#) [8R5006A18A120](#)  
[1604232](#) [1R3006A20M005](#) [RF-12P1N8A80DU](#) [RF-12P1N8A90DU](#) [41-40011](#) [42-01015](#) [4-22279-4](#) [4-22281-1](#) [4-22284-9](#) [43-00113](#) [43-](#)  
[01088](#) [43-01203](#) [41-40013](#) [42-00008](#) [43-00343](#) [43-01032](#) [43-01162](#) [43-10000](#) [600X518050X](#) [SACC-DSI-FS-5P-PG9-L180 SC](#)  
[8R5006A16M020](#) [8R5006A16M005](#) [8R4000A16M010](#) [6-22279-3](#) [1605332](#) [N03FA03144](#) [1300140077](#) [43-01338](#) [XS2RD4265](#) [RSC 4/9](#)  
[XS2R-D426-1](#) [XS8A-0441](#)