

SPECIFICATION CONTROL DRAWING

55PC4233

TITLE

THREE CONDUCTOR CABLE, JACKETED, 600 VOLT


Date

06-04-01

Revision

A

This specification sheet forms a part of the latest issue of Raychem Specification 55PC.

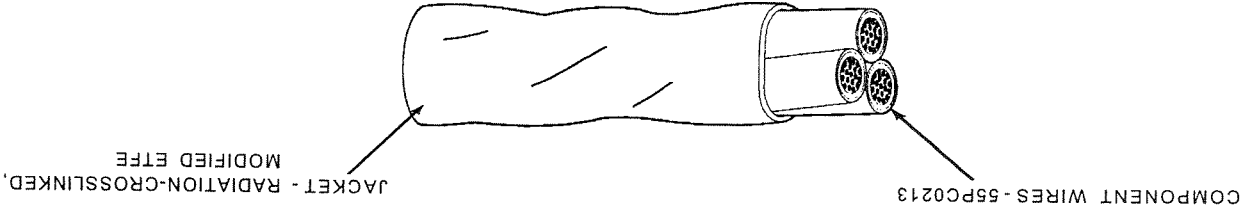

CONSTRUCTION DETAILS

PART NUMBER	CONDUCTOR SIZE (AWG)	JACKET THICKNESS (in.)		DIAMETER (in.)		WEIGHT (lbs/1000 ft.)	
		LOWER SPEC LIMIT	TARGET WALL	LOWER SPEC LIMIT	TARGET VALUE	UPPER SPEC LIMIT	TARGET VALUE
55PC4233-24*	24	.0055	.0070	.095	.100	7.69	8.21
55PC4233-22*	22	.0060	.0075	.108	.113	10.69	11.28
55PC4233-20*	20	.0060	.0075	.127	.132	15.61	16.30
55PC4233-18*	18	.0060	.0075	.148	.153	22.65	23.50
55PC4233-16*	16	.0060	.0080	.164	.170	28.52	29.53
55PC4233-14*	14	.0060	.0080	.197	.202	42.77	44.03
55PC4233-12*	12	.0060	.0080	.237	.244	64.30	65.87
55PC4233-10*	10	.0070	.0085	.289	.297	100.27	102.77
55PC4233-8*	8	.0090	.0100	.426	.443	183.96	194.46

CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 200°C
 Maximum continuous conductor temperature
 VOLTAGE RATING: 600 volts (rms)
 DIELECTRIC WITHSTAND: 1500 volts (rms)
 CROSSLINK VERIFICATION: 300 ± 3°C for 1 hour
 JACKET COLOR: White preferred
 JACKET ELONGATION AND TENSILE STRENGTH:
 Elongation, 50% (minimum)
 Tensile Strength, 5000 lbf/in² (minimum)

TEMPERATURE RATING: 200°C
 Maximum continuous conductor temperature
 VOLTAGE RATING: 600 volts (rms)
 DIELECTRIC WITHSTAND: 1500 volts (rms)
 CROSSLINK VERIFICATION: 300 ± 3°C for 1 hour
 JACKET COLOR: White preferred
 JACKET ELONGATION AND TENSILE STRENGTH:
 Elongation, 50% (minimum)
 Tensile Strength, 5000 lbf/in² (minimum)

PART NUMBER:
 The "***" in the part numbers above shall be replaced by a color code designator with a slash separating the component wire colors and a dash separating the component wire colors from the jacket color.
 Example: AWG 20, red, blue and yellow component wires; white jacket: 55PC4233-20-2/6/4-9

COLOR AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681.

THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

Raychem

300 Constitution Drive, Menlo Park, California 94025
 1-800-2-Raychem FAX: 650-361-6297

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Multi-Conductor Cables](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[89182-010-1000](#) [6000FE-877-1000](#) [M27500-20SP2S23](#) [6300FE-877-U1000](#) [6309UE-877-1000](#) [6502FE 8771000](#) [6541PA-008-U1000](#)
[CV6807-000](#) [CW9530-000](#) [CX6543-000](#) [CXA-0066-20-4-9CS2973](#) [CXA-0078-16-1-9CS2405](#) [CXA-0078-22-4-9CS2405](#) [CXA-0078-24-4-9CS2405](#) [CXA-0140-16-6/9-9CS2405](#) [CY0660-000](#) [720451-000](#) [752687-000](#) [82841-877-5000](#) [8348-060-500](#) [83559-002-1000](#) [83653-002-5000](#) [83659-002-1000](#) [83709-002-1000](#) [8404-060-500](#) [8469 060100](#) [8628-060-500](#) [868361-001](#) [8730-060-1000](#) [8737-060-U1000](#) [8747-060-100](#) [8747-060-1000](#) [8769-060-1000](#) [8775-060-500](#) [877541-000](#) [8780-060-1000](#) [88444-002-1000](#) [9159-060-500](#) [939870-000](#) [9423 060U500](#) [9444 060U1000](#) [9497 0001000](#) [9515-060-1000](#) [9520-060-1000](#) [9524-060-1000](#) [9546-060-500](#) [9572-002-U500](#) [9774-060-1000](#) [1213F-D15-A1000](#) [1213F-009-A1000](#)