


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
	T2	REVISED PER ECO-11-005027		12MAR11	RK	HMR	

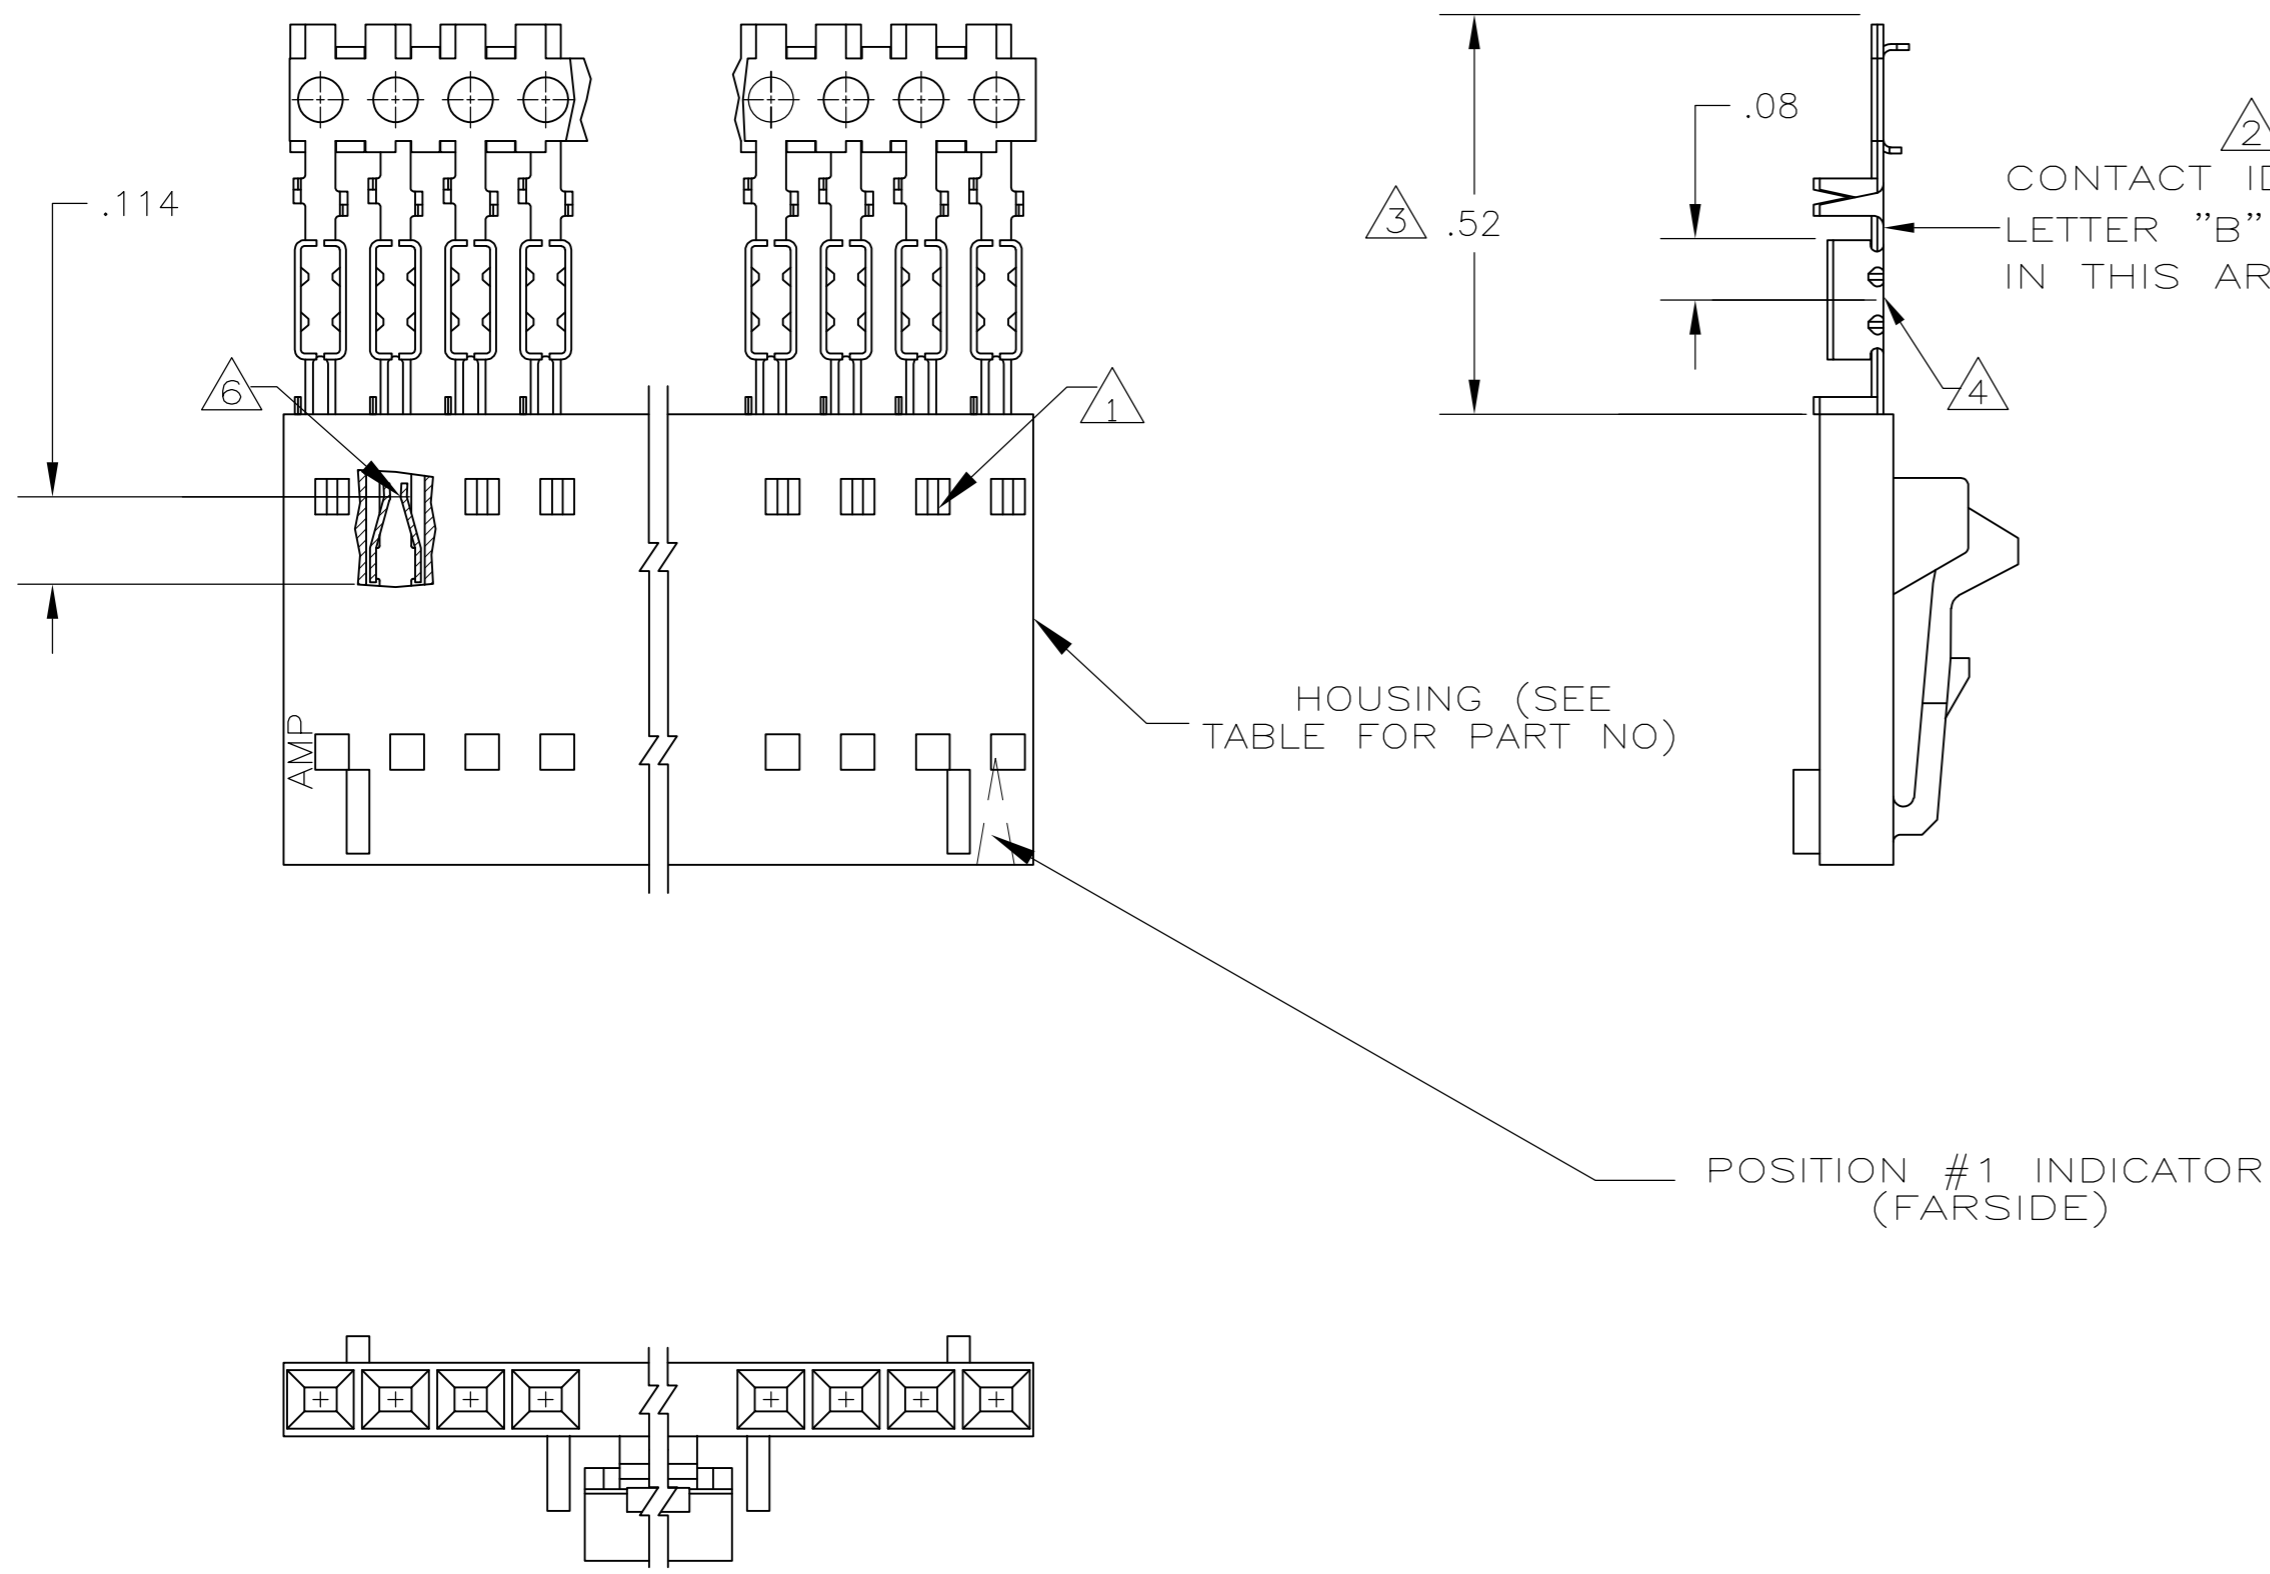

9	8	DESCRIPTION	NO OF POSN	ASSEMBLY PART NUMBER
OBSELETE	8	2-104257-4	25	7-103645-4
OBSELETE	8	2-104257-3	24	7-103645-3
OBSELETE	8	2-104257-2	23	7-103645-2
OBSELETE	8	2-104257-1	22	7-103645-1
OBSELETE	8	2-104257-0	21	7-103645-0
OBSELETE	8	1-104257-9	20	6-103645-9
OBSELETE	8	1-104257-8	19	6-103645-8
OBSELETE	8	1-104257-7	18	6-103645-7
OBSELETE	8	1-104257-6	17	6-103645-6
OBSELETE	8	1-104257-5	16	6-103645-5
OBSELETE	8	1-104257-4	15	6-103645-4
OBSELETE	8	1-104257-3	14	6-103645-3
OBSELETE	8	1-104257-2	13	6-103645-2
OBSELETE	7	2-104257-4	25	2-103645-4
OBSELETE	7	2-104257-3	24	2-103645-3
OBSELETE	7	2-104257-2	23	2-103645-2
OBSELETE	7	2-104257-1	22	2-103645-1
OBSELETE	7	2-104257-0	21	2-103645-0
OBSELETE	7	1-104257-9	20	1-103645-9
OBSELETE	7	1-104257-8	19	1-103645-8
OBSELETE	7	1-104257-7	18	1-103645-7
OBSELETE	7	1-104257-6	17	1-103645-6
OBSELETE	7	1-104257-5	16	1-103645-5
OBSELETE	7	1-104257-4	15	1-103645-4
OBSELETE	7	1-104257-3	14	1-103645-3
OBSELETE	7	1-104257-2	13	1-103645-2

SUPERSEDED BY 1-103956-1	1-104257-1	12	1-103645-1
SUPERSEDED BY 1-103956-0	1-104257-0	11	1-103645-0
SUPERSEDED BY 103956-9	104257-9	10	103645-9
SUPERSEDED BY 103956-8	104257-8	9	103645-8
SUPERSEDED BY 103956-7	104257-7	8	103645-7
SUPERSEDED BY 103956-6	104257-6	7	103645-6
SUPERSEDED BY 103956-5	104257-5	6	103645-5
SUPERSEDED BY 103956-4	104257-4	5	103645-4
SUPERSEDED BY 103956-3	104257-3	4	103645-3
SUPERSEDED BY 103956-2	104257-2	3	103645-2
SUPERSEDED BY 103956-1	104257-1	2	103645-1

- 1 CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- 2 USE WITH #22-#26 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- 3 THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 FOR STRIP ASSEMBLIES SEE PART NUMBER 103956
- 6 POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE BEAMS)
- 7 CONTACTS: .000100-.000200 BRIGHT TIN-LEAD OVER .000050 NICKEL
- 8 .000100-.000200 MATTE TIN OVER .000050 NICKEL
- 9 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DWN L A MAYER 11-4-86	TE Connectivity
		CHK P de JONG 11-12-86	
		APVD P de JONG 11-12-86	RCPT ASSY, AMPMODU MTE, SINGLE, LATCHED & POLARIZED, FOR #22-#26 AWG WIRE SIZE
		PRODUCT SPEC 108-25034	
		APPLICATION SPEC 114-25026	RESTRICTED TO
MATERIAL: HOUSING FLAME RETARDANT THERMOPLASTIC, COLOR-BLACK CONTACTS- PHOS BRONZE	FINISH: SEE TABLE	WEIGHT: -	SIZE: A2 CAGE CODE: 00779 DRAWING NO: 103645
		CUSTOMER DRAWING	SCALE: 4:1 SHEET: 1 OF 1 REV: T2

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[892-18-020-10-001101](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [009176003701906](#) [0050291907](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#)
[609-3404](#) [61062-3](#) [61082-181009](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [641991-4](#) [644827-2](#) [65817-](#)
[010LF](#) [65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68645-018](#) [68648-049](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)
[4853B](#) [707-5020](#) [707-5028](#) [71.350.2428.0](#) [71918-208LF](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [79531-3000](#)
[FCN-360C032-B](#) [FCN-367T-T012/H](#) [FCN-723D010/2](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#)