
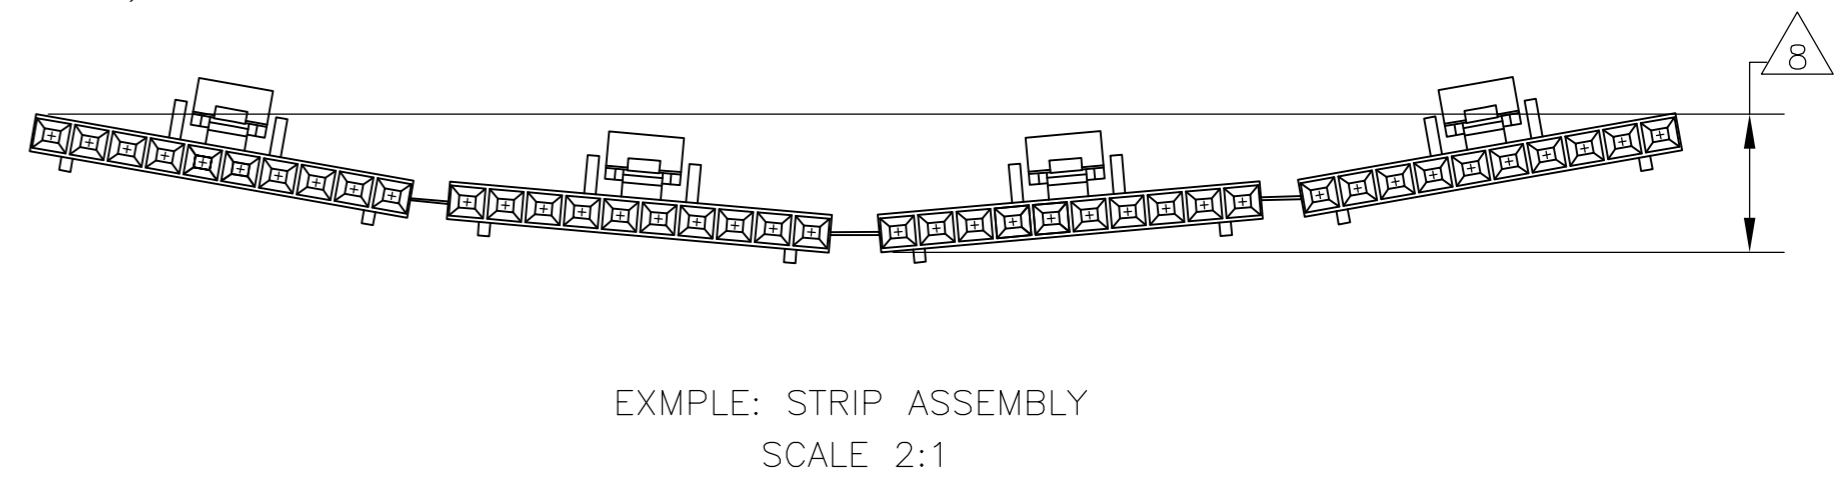


| LOC |    | DIST |     | REVISIONS                 |         |     |      |
|-----|----|------|-----|---------------------------|---------|-----|------|
| AD  | 00 | P    | LTR | DESCRIPTION               | DATE    | DWN | APVD |
|     |    | P1   |     | REVISED PER ECO-11-004587 | 11MAR11 | RK  | HMR  |

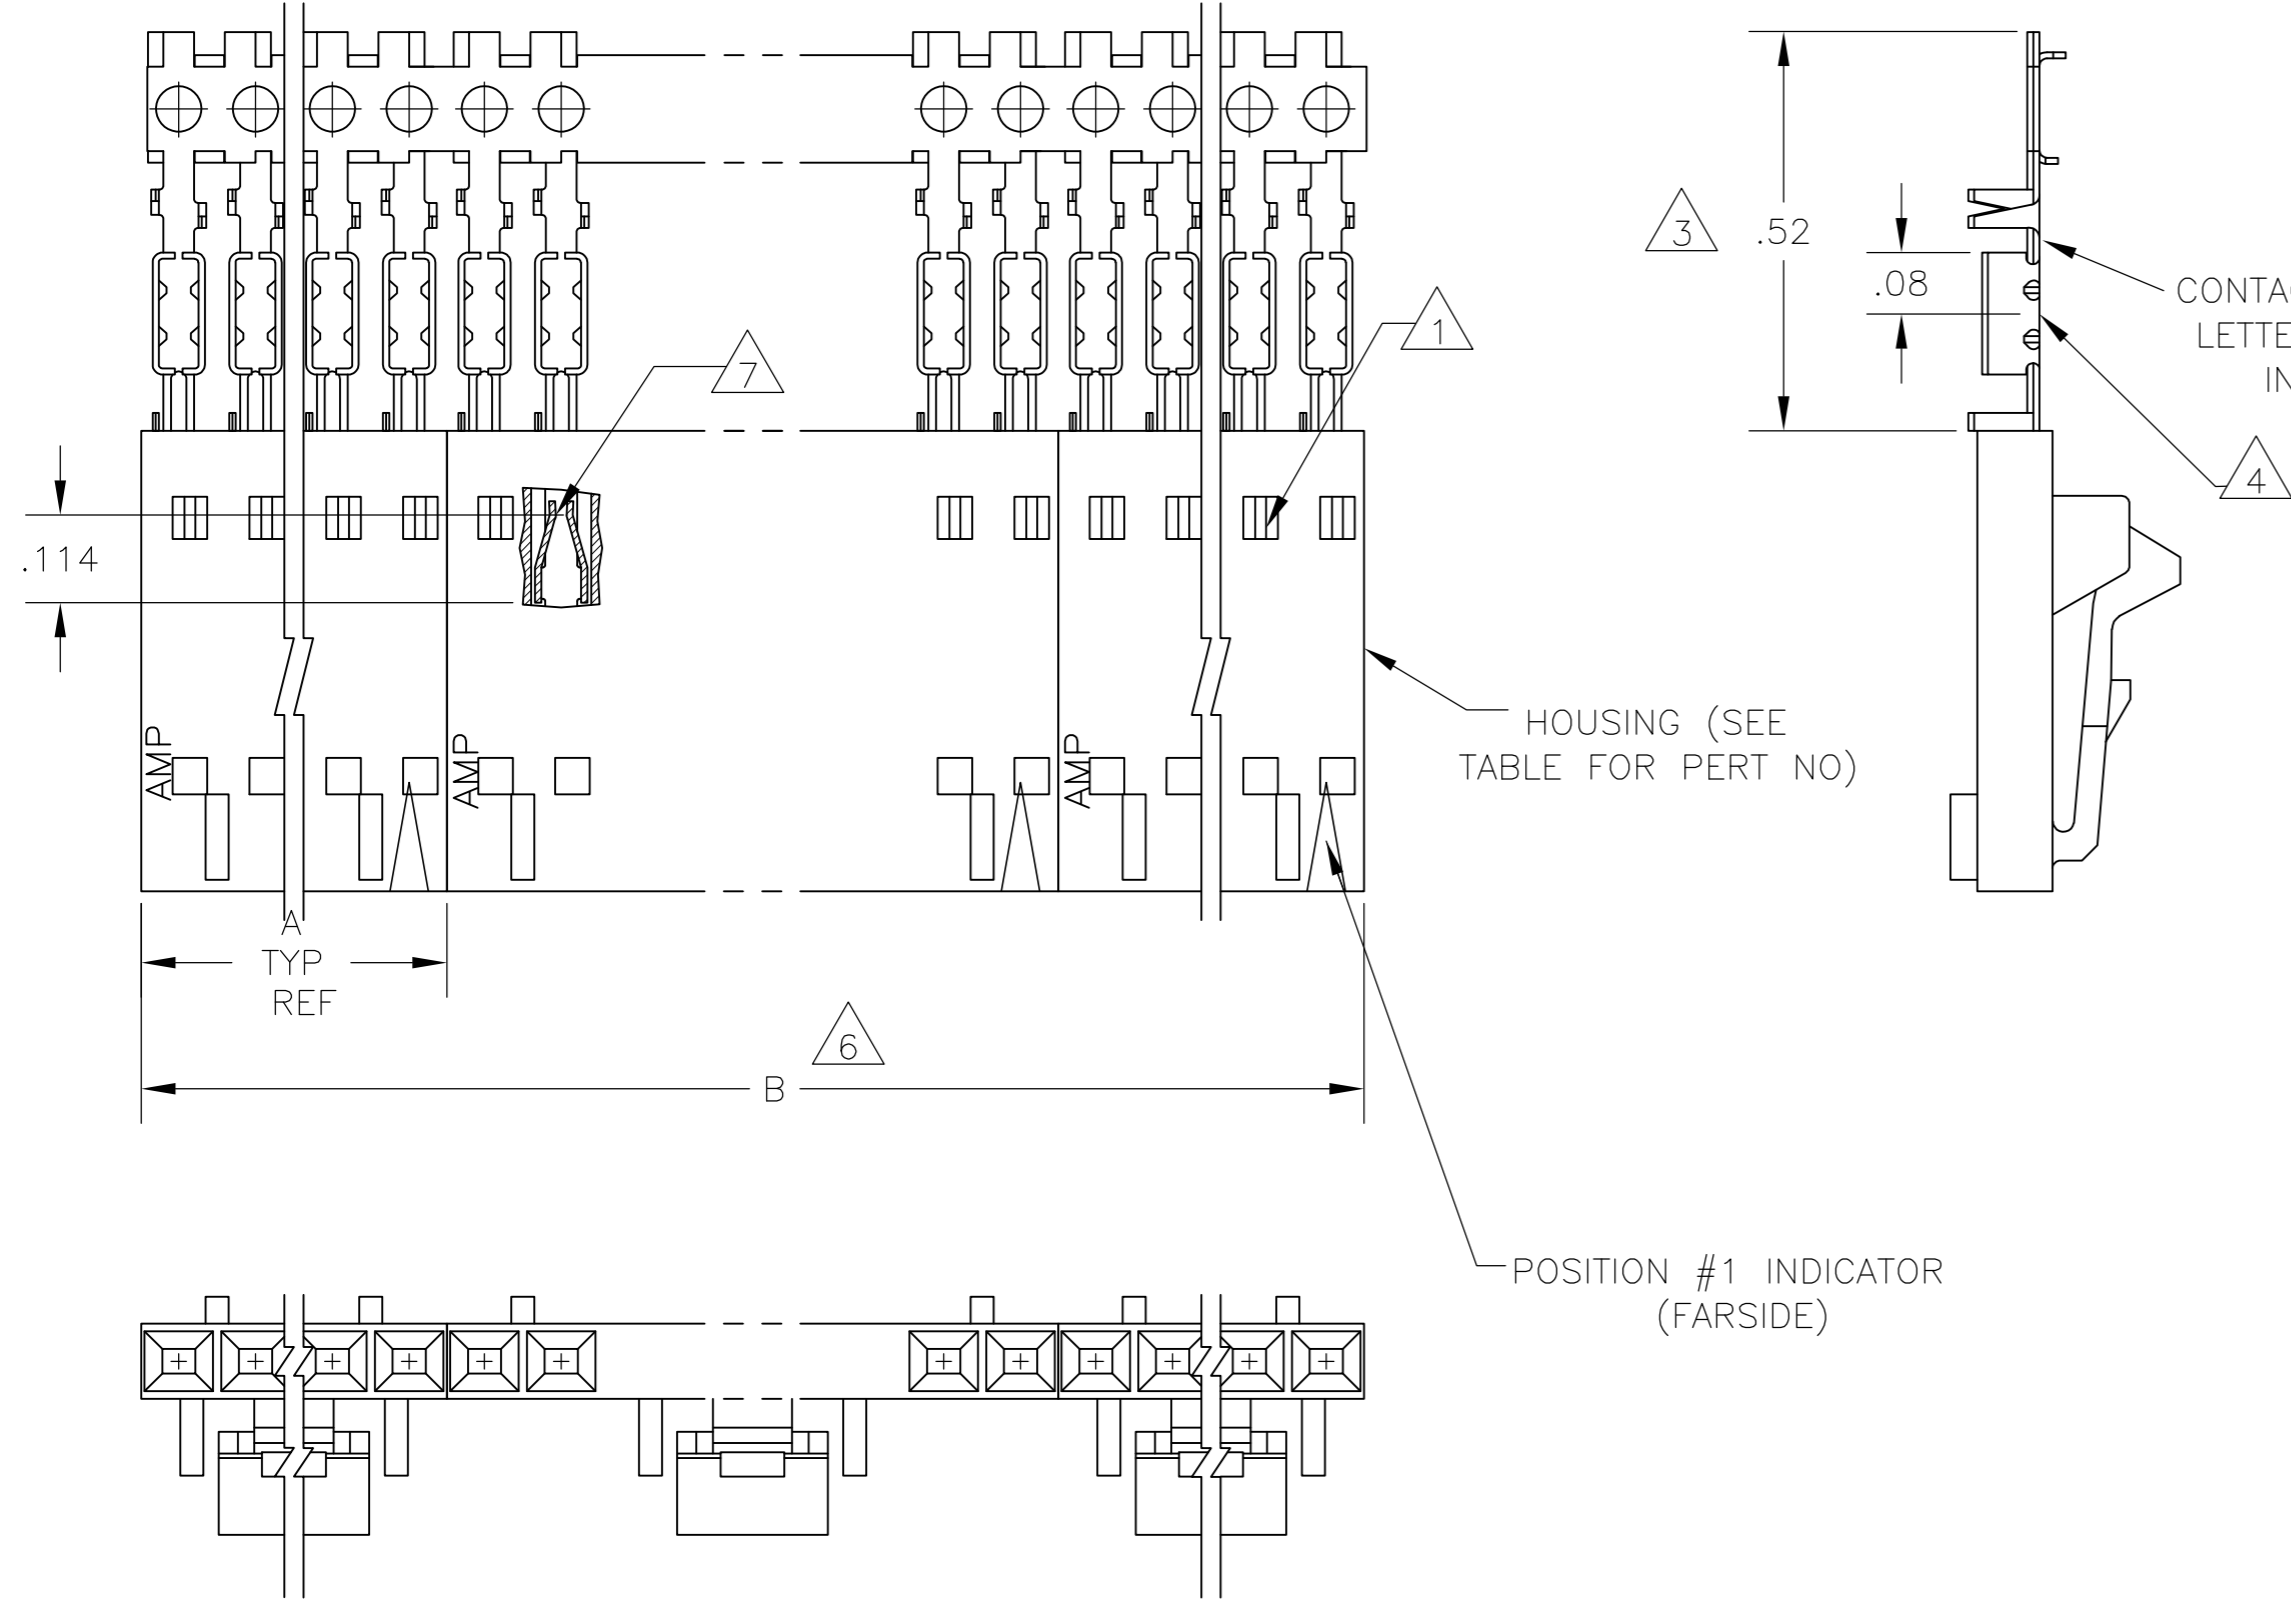

|         |    |      |       |                     |            |                               |
|---------|----|------|-------|---------------------|------------|-------------------------------|
| 12      | 2  | 2.40 | 1.198 | 1-104257-1          | 12         | 6-103958-1                    |
| 12      | 2  | 2.20 | 1.098 | 1-104257-0          | 11         | 6-103958-0                    |
| 12      | 2  | 2.00 | .998  | 104257-9            | 10         | 5-103958-9                    |
| 12      | 2  | 1.80 | .898  | 104257-8            | 9          | 5-103958-8                    |
| 12      | 2  | 1.60 | .798  | 104257-7            | 8          | 5-103958-7                    |
| 12      | 2  | 1.40 | .698  | 104257-6            | 7          | 5-103958-6                    |
| 12      | 4  | 2.39 | .598  | 104257-5            | 6          | 5-103958-5                    |
| 12      | 4  | 1.99 | .498  | 104257-4            | 5          | 5-103958-4                    |
| 12      | 5  | 1.99 | .398  | 104257-3            | 4          | 5-103958-3                    |
| 12      | 8  | 2.40 | .298  | 104257-2            | 3          | 5-103958-2                    |
| 12      | 10 | 2.00 | .198  | 104257-1            | 2          | 5-103958-1                    |
| 10      | 2  | 1.60 | .798  | 104257-7            | 8          | 1-103958-6                    |
| 10      | 4  | 1.99 | .498  | 104257-4            | 5          | 1-103958-5                    |
| 10      | 5  | 1.99 | .398  | 104257-3            | 4          | 1-103958-4                    |
| 10      | 8  | 2.40 | .298  | 104257-2            | 3          | 1-103958-3                    |
| 10      | 10 | 2.00 | .198  | 104257-1            | 2          | 1-103958-2                    |
| 9       | 2  | 2.40 | 1.198 | 1-104257-1          | 12         | 1-103958-1                    |
| 9       | 2  | 2.20 | 1.098 | 1-104257-0          | 11         | 1-103958-0                    |
| 9       | 2  | 2.00 | .998  | 104257-9            | 10         | 103958-9                      |
| 9       | 2  | 1.80 | .898  | 104257-8            | 9          | 103958-8                      |
| 9       | 2  | 1.60 | .798  | 104257-7            | 8          | 103958-7                      |
| 9       | 2  | 1.40 | .698  | 104257-6            | 7          | 103958-6                      |
| 9       | 4  | 2.39 | .598  | 104257-5            | 6          | 103958-5                      |
| 9       | 4  | 1.99 | .498  | 104257-4            | 5          | 103958-4                      |
| 9       | 5  | 1.99 | .398  | 104257-3            | 4          | 103958-3                      |
| 9       | 8  | 2.40 | .298  | 104257-2            | 3          | 103958-2                      |
| 9       | 10 | 2.00 | .198  | 104257-1            | 2          | 103958-1                      |
| PLATING | 6  | B    | A     | HOUSING PART NUMBER | NO OF POSN | ASSEMBLY PART NUMBER ON STRIP |

- 1 CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- 2 USE WITH #22-#26 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- 3 THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 FOR INDIVIDUAL ASSEMBLIES SEE PART NUMBER 103734
- 6 ASSEMBLIES ARE JOINED BY THE CARRIER STRIP. ORDER QUANTITY REFLECTS TOTAL NUMBER OF INDIVIDUAL ASSEMBLIES REQUIRED. SEE TABLE FOR NUMBER OF ASSEMBLIES PER STRIP.
- 7 POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE BEAMS)
- 8 MAXIMUM ALLOWABLE BOW OF ASSEMBLY NOT TO EXCEED .055.
- 9 .000030 GOLD IN THE CONTACT AREA. .000050-.000100 BRIGHT TIN-LEAD ON THE TERMINATION AREA, ALL OVER .000050 NICKEL.
- 10 .000030 GOLD IN THE CONTACT AREA. .000050-.000100 BRIGHT TIN ON THE TERMINATION AREA, ALL OVER .000050 NICKEL.
- 11 PRELIMINARY PART - NOT RELEASED FOR PRODUCTION.
- 12 .000030 GOLD IN THE CONTACT AREA, .000050 - .000100 MATTE TIN ON THE TERMINATION AREA, ALL OVER .000050 NICKEL

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN L A MAYER 11-4-86  
 CHK P de Jong 11-12-86  
 APVD P de Jong 11-12-86

TE Connectivity

RCPT ASSY, AMPMODU MTE, SINGLE ROW, .100 C/L, LATCHED & POLARIZED, FOR NO 22-NO 26 AWG WIRE SIZE, STRIP FORM

108-25034  
 114-25026

SIZE A2 CAGE CODE 00779 C=103958

SCALE 4:1 SHEET 1 of 1 REV P1

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [TE Connectivity](#) manufacturer:*

Other Similar products are found below :

[892-18-020-10-001101](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [009176003701906](#) [0050291907](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#)  
[609-3404](#) [61062-3](#) [61082-181009](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [641991-4](#) [644827-2](#) [65817-010LF](#) [65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68645-018](#) [68648-049](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5020](#) [707-5028](#) [71.350.2428.0](#) [71918-208LF](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [79531-3000](#)  
[FCN-360C032-B](#) [FCN-367T-T012/H](#) [FCN-723D010/2](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#)