

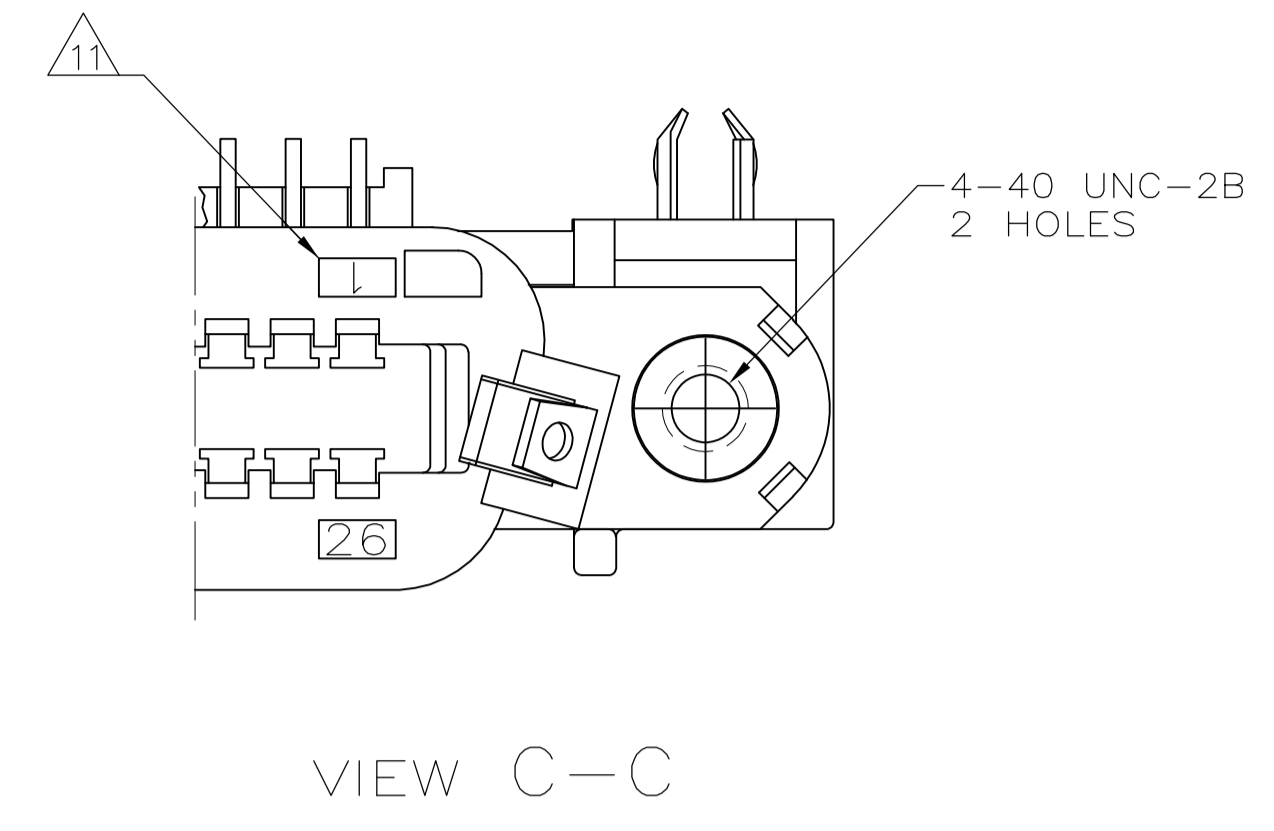
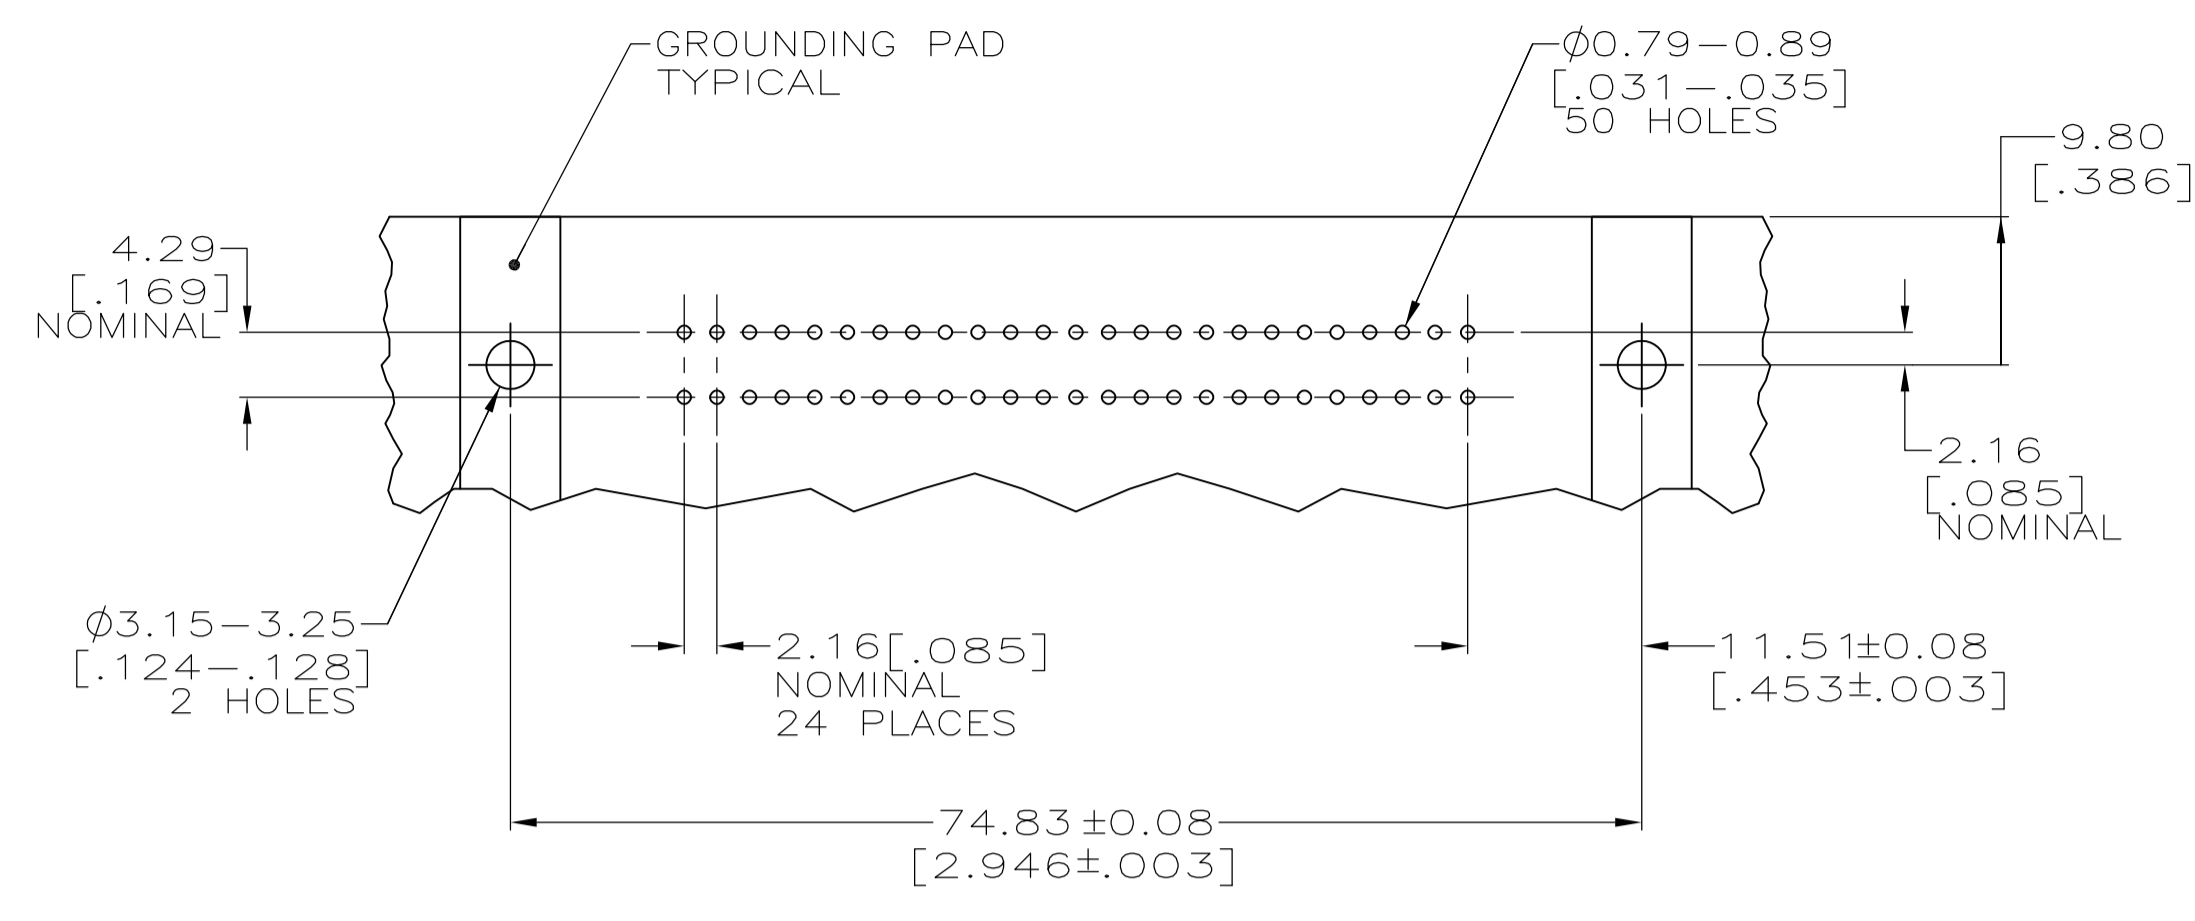
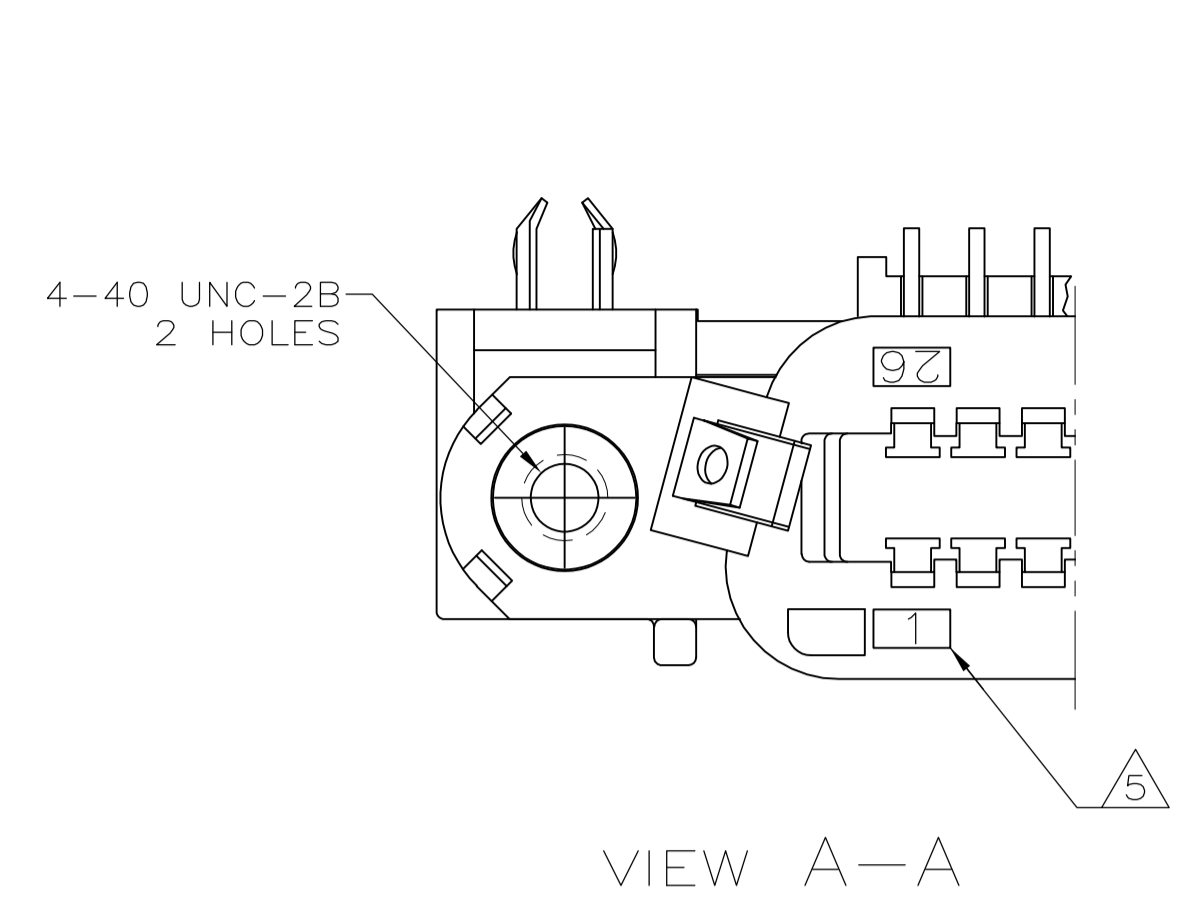
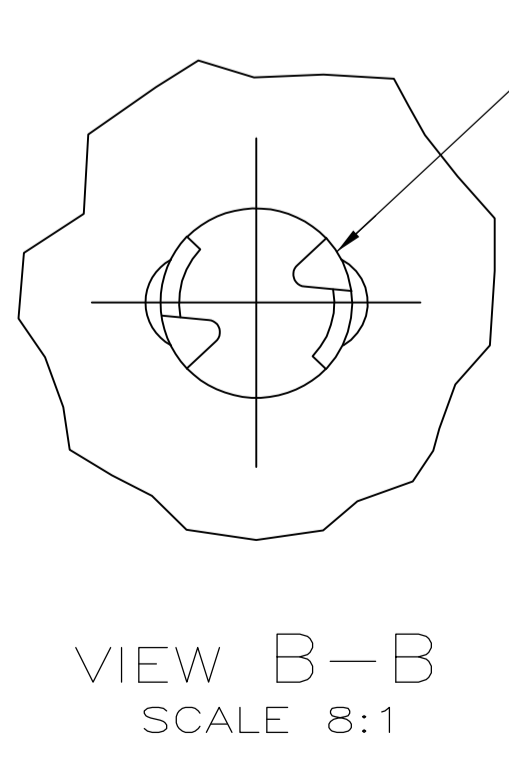
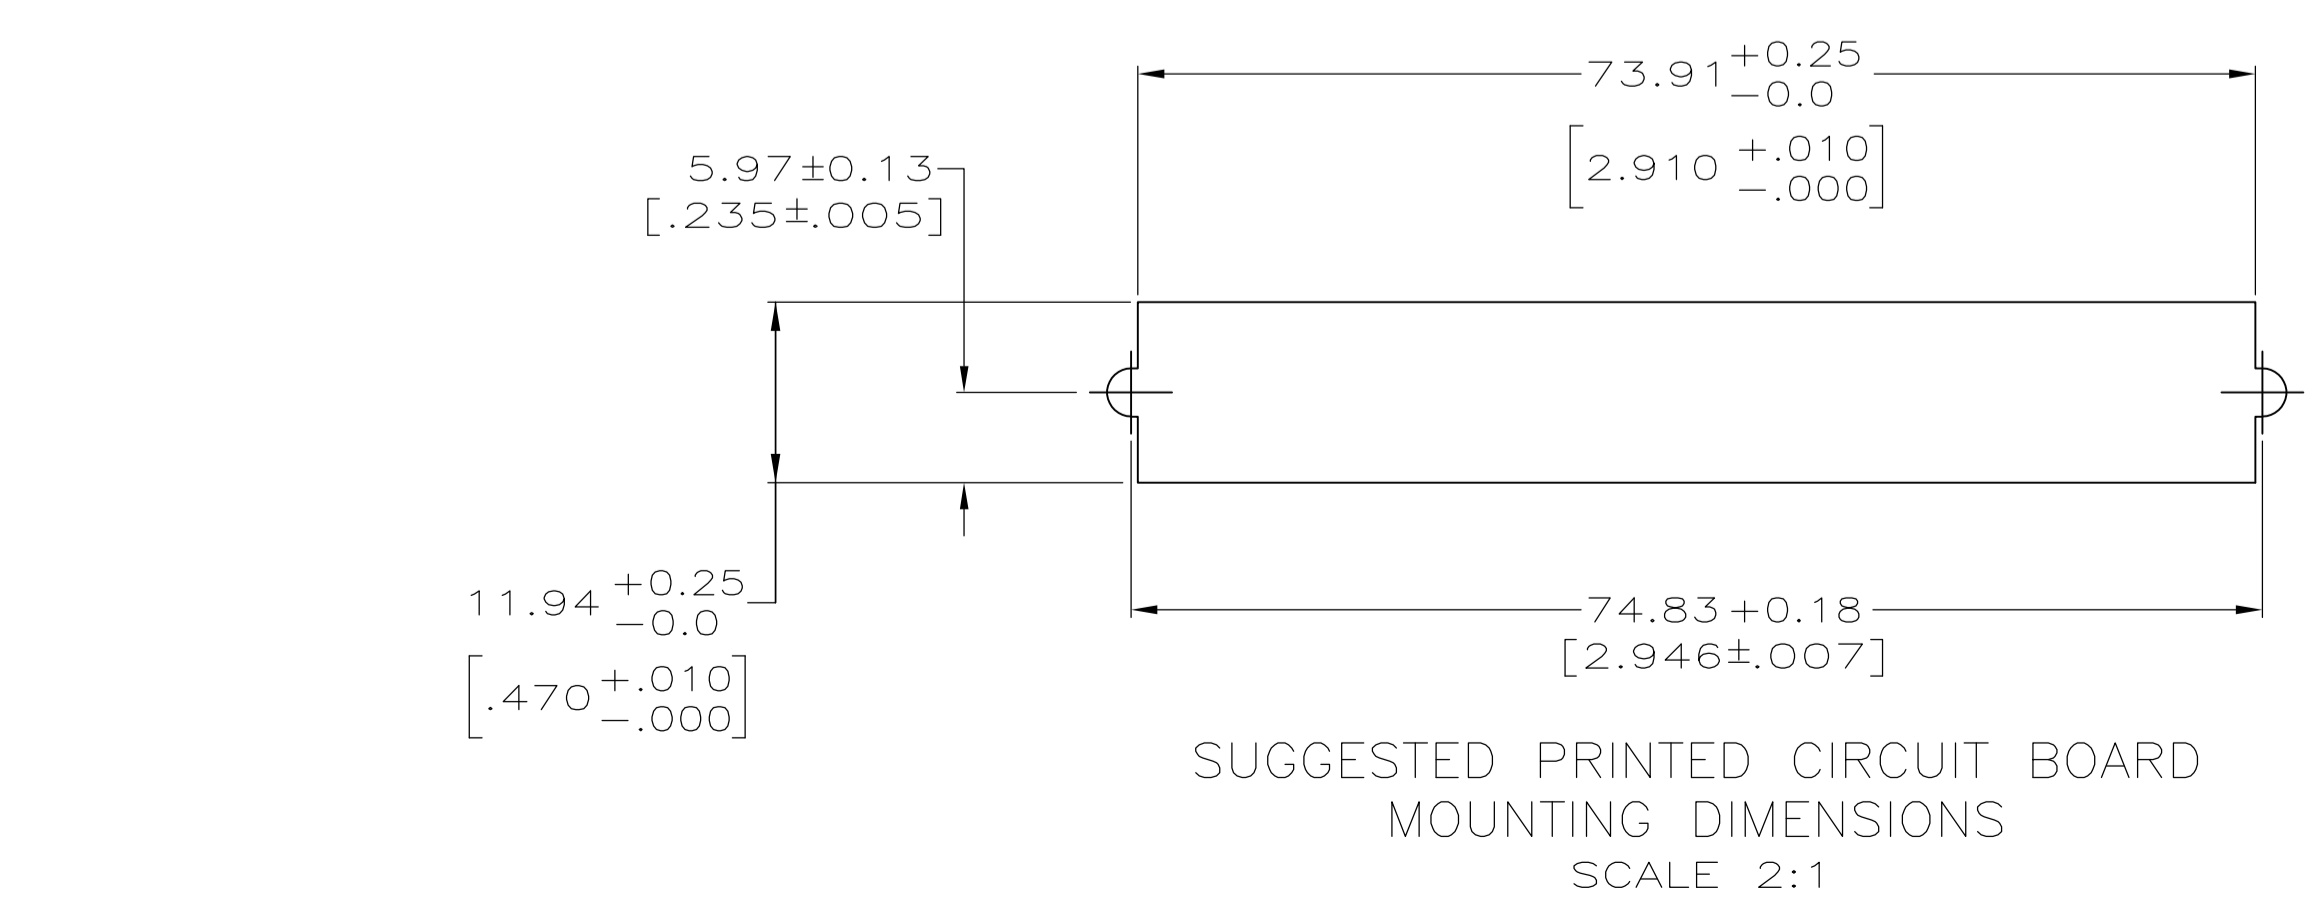


LOC		DIST		REVISIONS			
GP	00	REV	DATE	BY	CHK	APPV	
B		REVISED PER ECO-08-007327	09APR08	BM	WM		
B1		REVISED PER ECO-10-000444	19JAN10	KK	HMR		

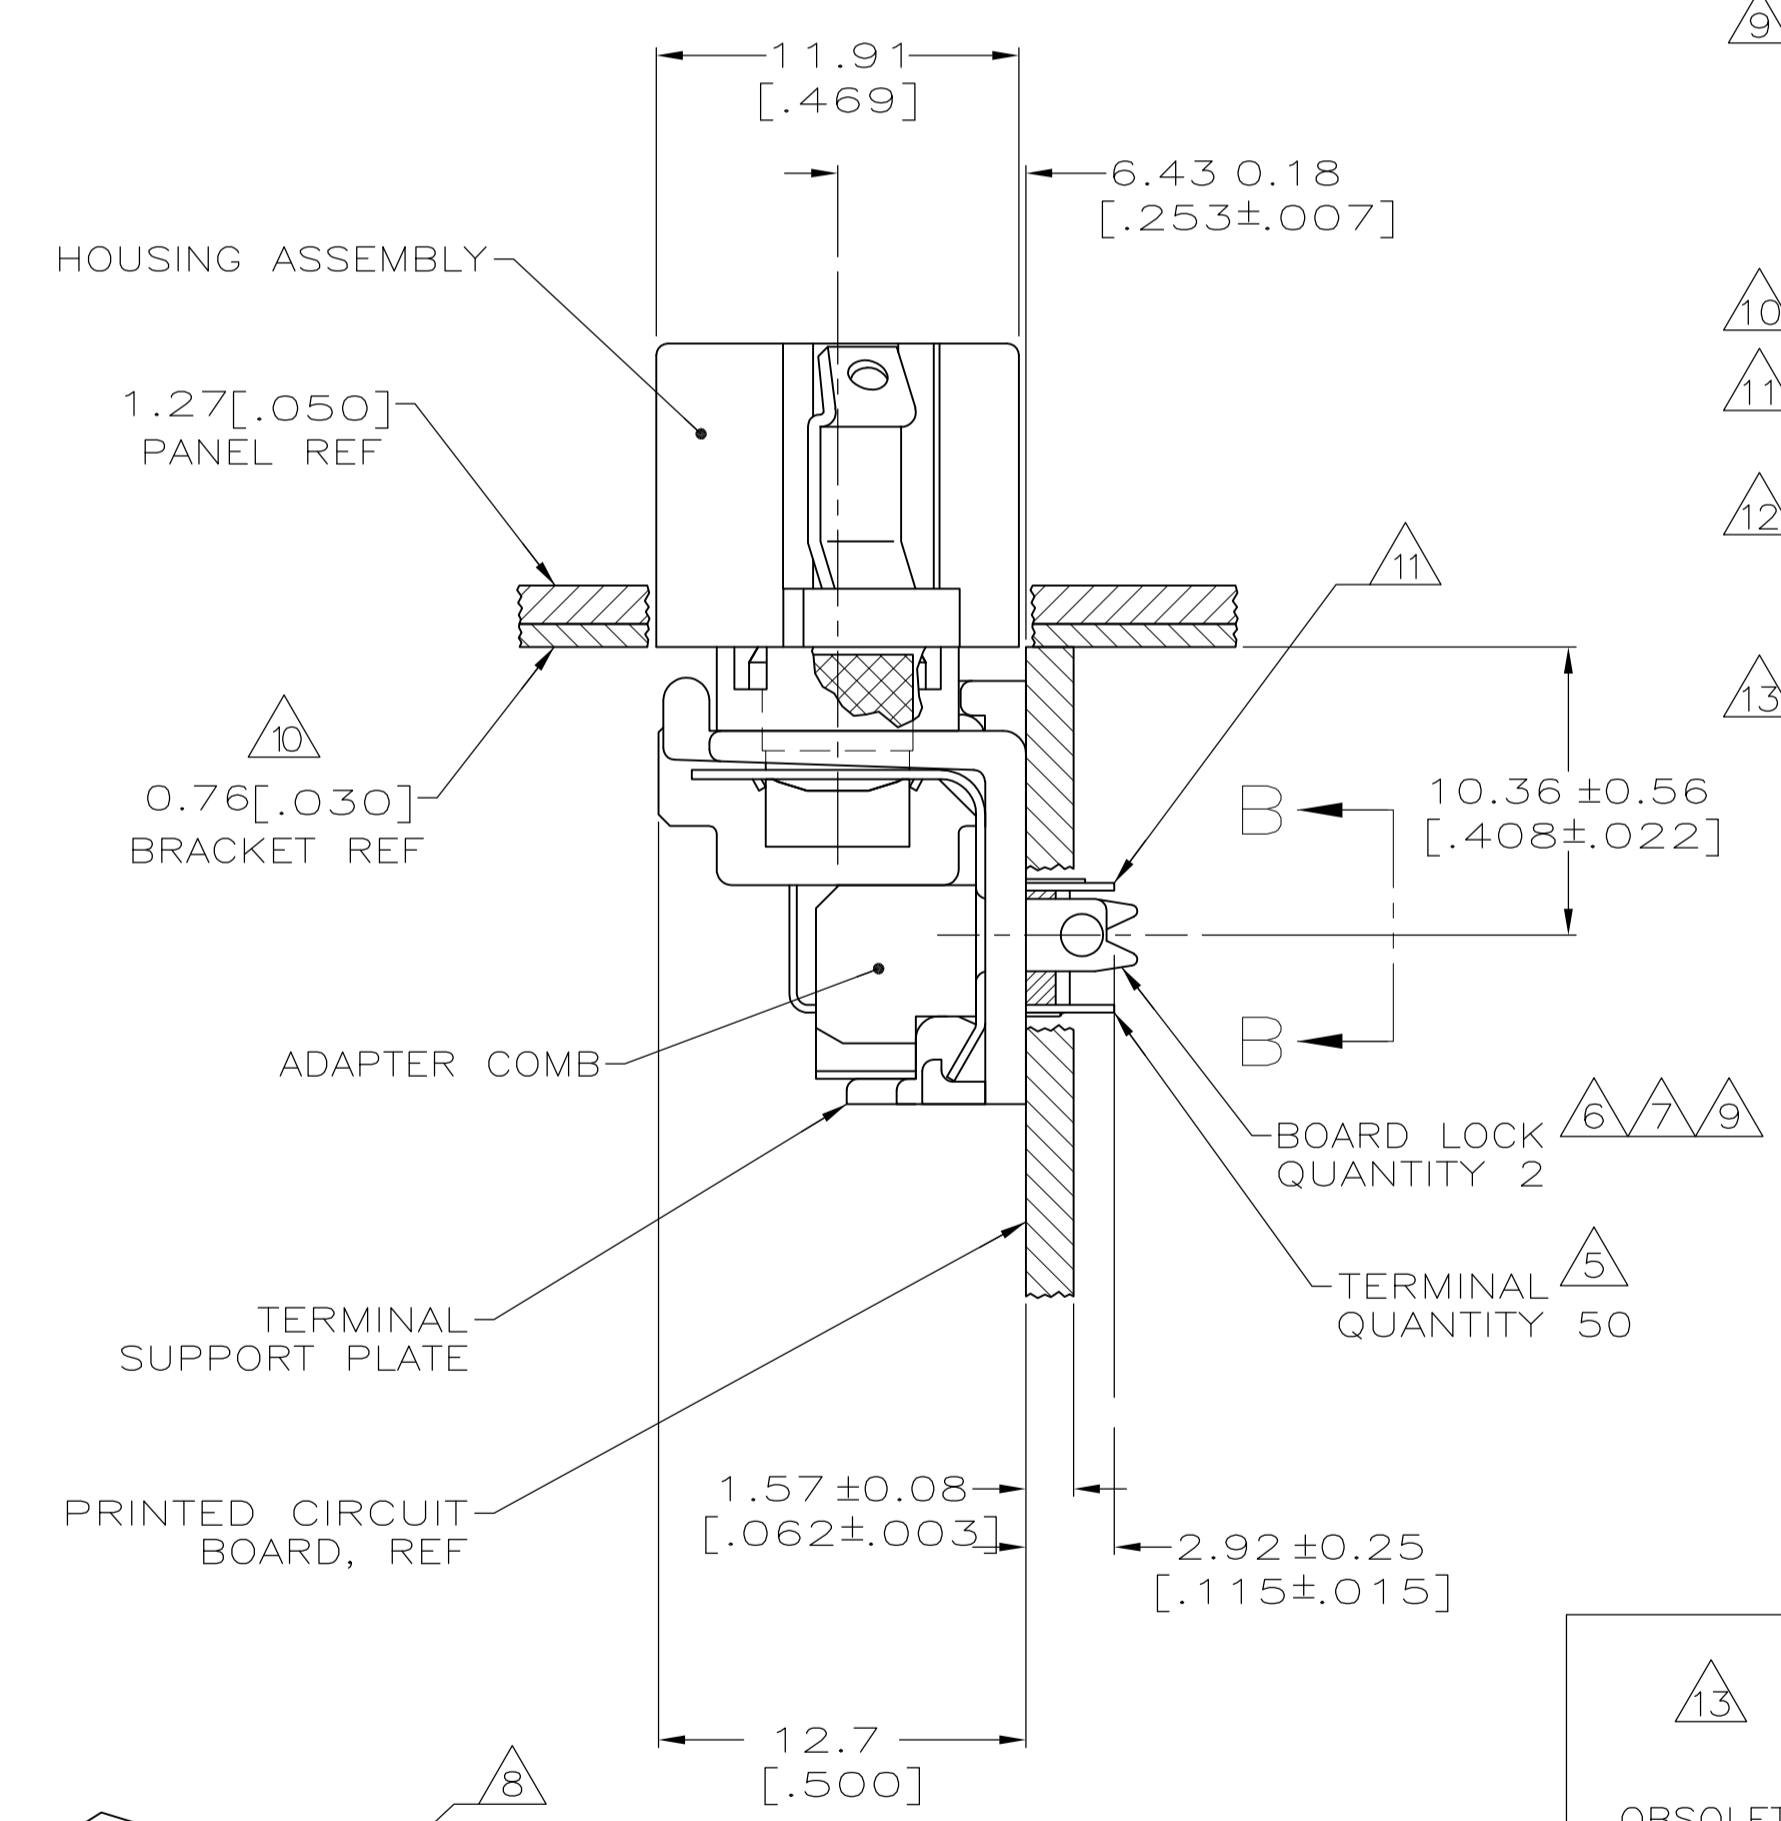

- 1. MATERIAL:  
HOUSING, SUPPORT PLATE & ADAPTER COMB - POLYESTER, BLACK.  
LATCH - ZINC PLATED CARBON STEEL.  
INSERT - BRASS.  
TERMINALS - HIGH STRENGTH COPPER ALLOY PLATED WITH EITHER  $0.76\mu\text{m}$  [.000030] MIN GOLD PLATE OR GOLD FLASH OVER PALLADIUM NICKEL PLATE,  $0.76\mu\text{m}$  [.000030] MIN TOTAL ON MATING SURFACE.  $3.05\mu\text{m}$  [.000120] MIN TIN PLATE ON TAILS. ALL OVER  $1.27\mu\text{m}$  [.000050] MIN NICKEL UNDERPLATE OVER ENTIRE TERMINAL.  
BOARD LOCK - TIN PLATED CARBON STEEL.
- 2. THE CONTACT SURFACES OF THE TERMINALS ARE COATED WITH LUBRICANT.
- 3. CENTER-TO-CENTER SPACING OF TERMINALS IS 2.16 [.085] NOMINAL.
- 4. ALL DIMENSIONS SHOWN ARE MAXIMUM UNLESS OTHERWISE SPECIFIED.
- 5. TERMINAL 1 LOCATED IN THIS ROW FOR STANDARD ORIENTATION. SEE VIEW A-A.
- 6. BOARD LOCK RETAINS CONNECTOR IN 1.58 [.062] THICK PC BOARD WITHOUT ADDITIONAL HARDWARE.
- 7. BOARD LOCK LOCATES CONNECTOR FLUSH WITH TOP OF PC BOARD AND SPRING LOCKS BENEATH.
- 8. CYLINDRICAL SHAPE OFFERS 180° OF SOLERING SURFACE.
- 9. SURFACE AREA BELOW PC BOARD SHALL PASS SOLDERABILITY REQUIREMENTS IN ACCORDANCE WITH AMP SPEC 109-11-2. DISCOLORATION, SCRATCHES, SPOTS AND OTHER COSMETIC DEFICIENCIES TYPICAL OF BARREL PLATING PROCESSES ARE ACCEPTABLE PROVIDING PARTS PASS 24 HOUR EXPOSURE AT 95% RH AT 40°C WITHOUT EVIDENCE OF CORROSION.
- 10. BRACKET SUPPLIED BY CUSTOMER. (OPTIONAL)
- 11. TERMINAL 1 LOCATED IN THIS ROW FOR REVERSE ORIENTATION. SEE VIEW C-C.
- 12. ONE LATCH ONLY, LOCATED AT CIRCUIT 1/26 END, P/N 6116794-5 AND 6116794-6.
- 13. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

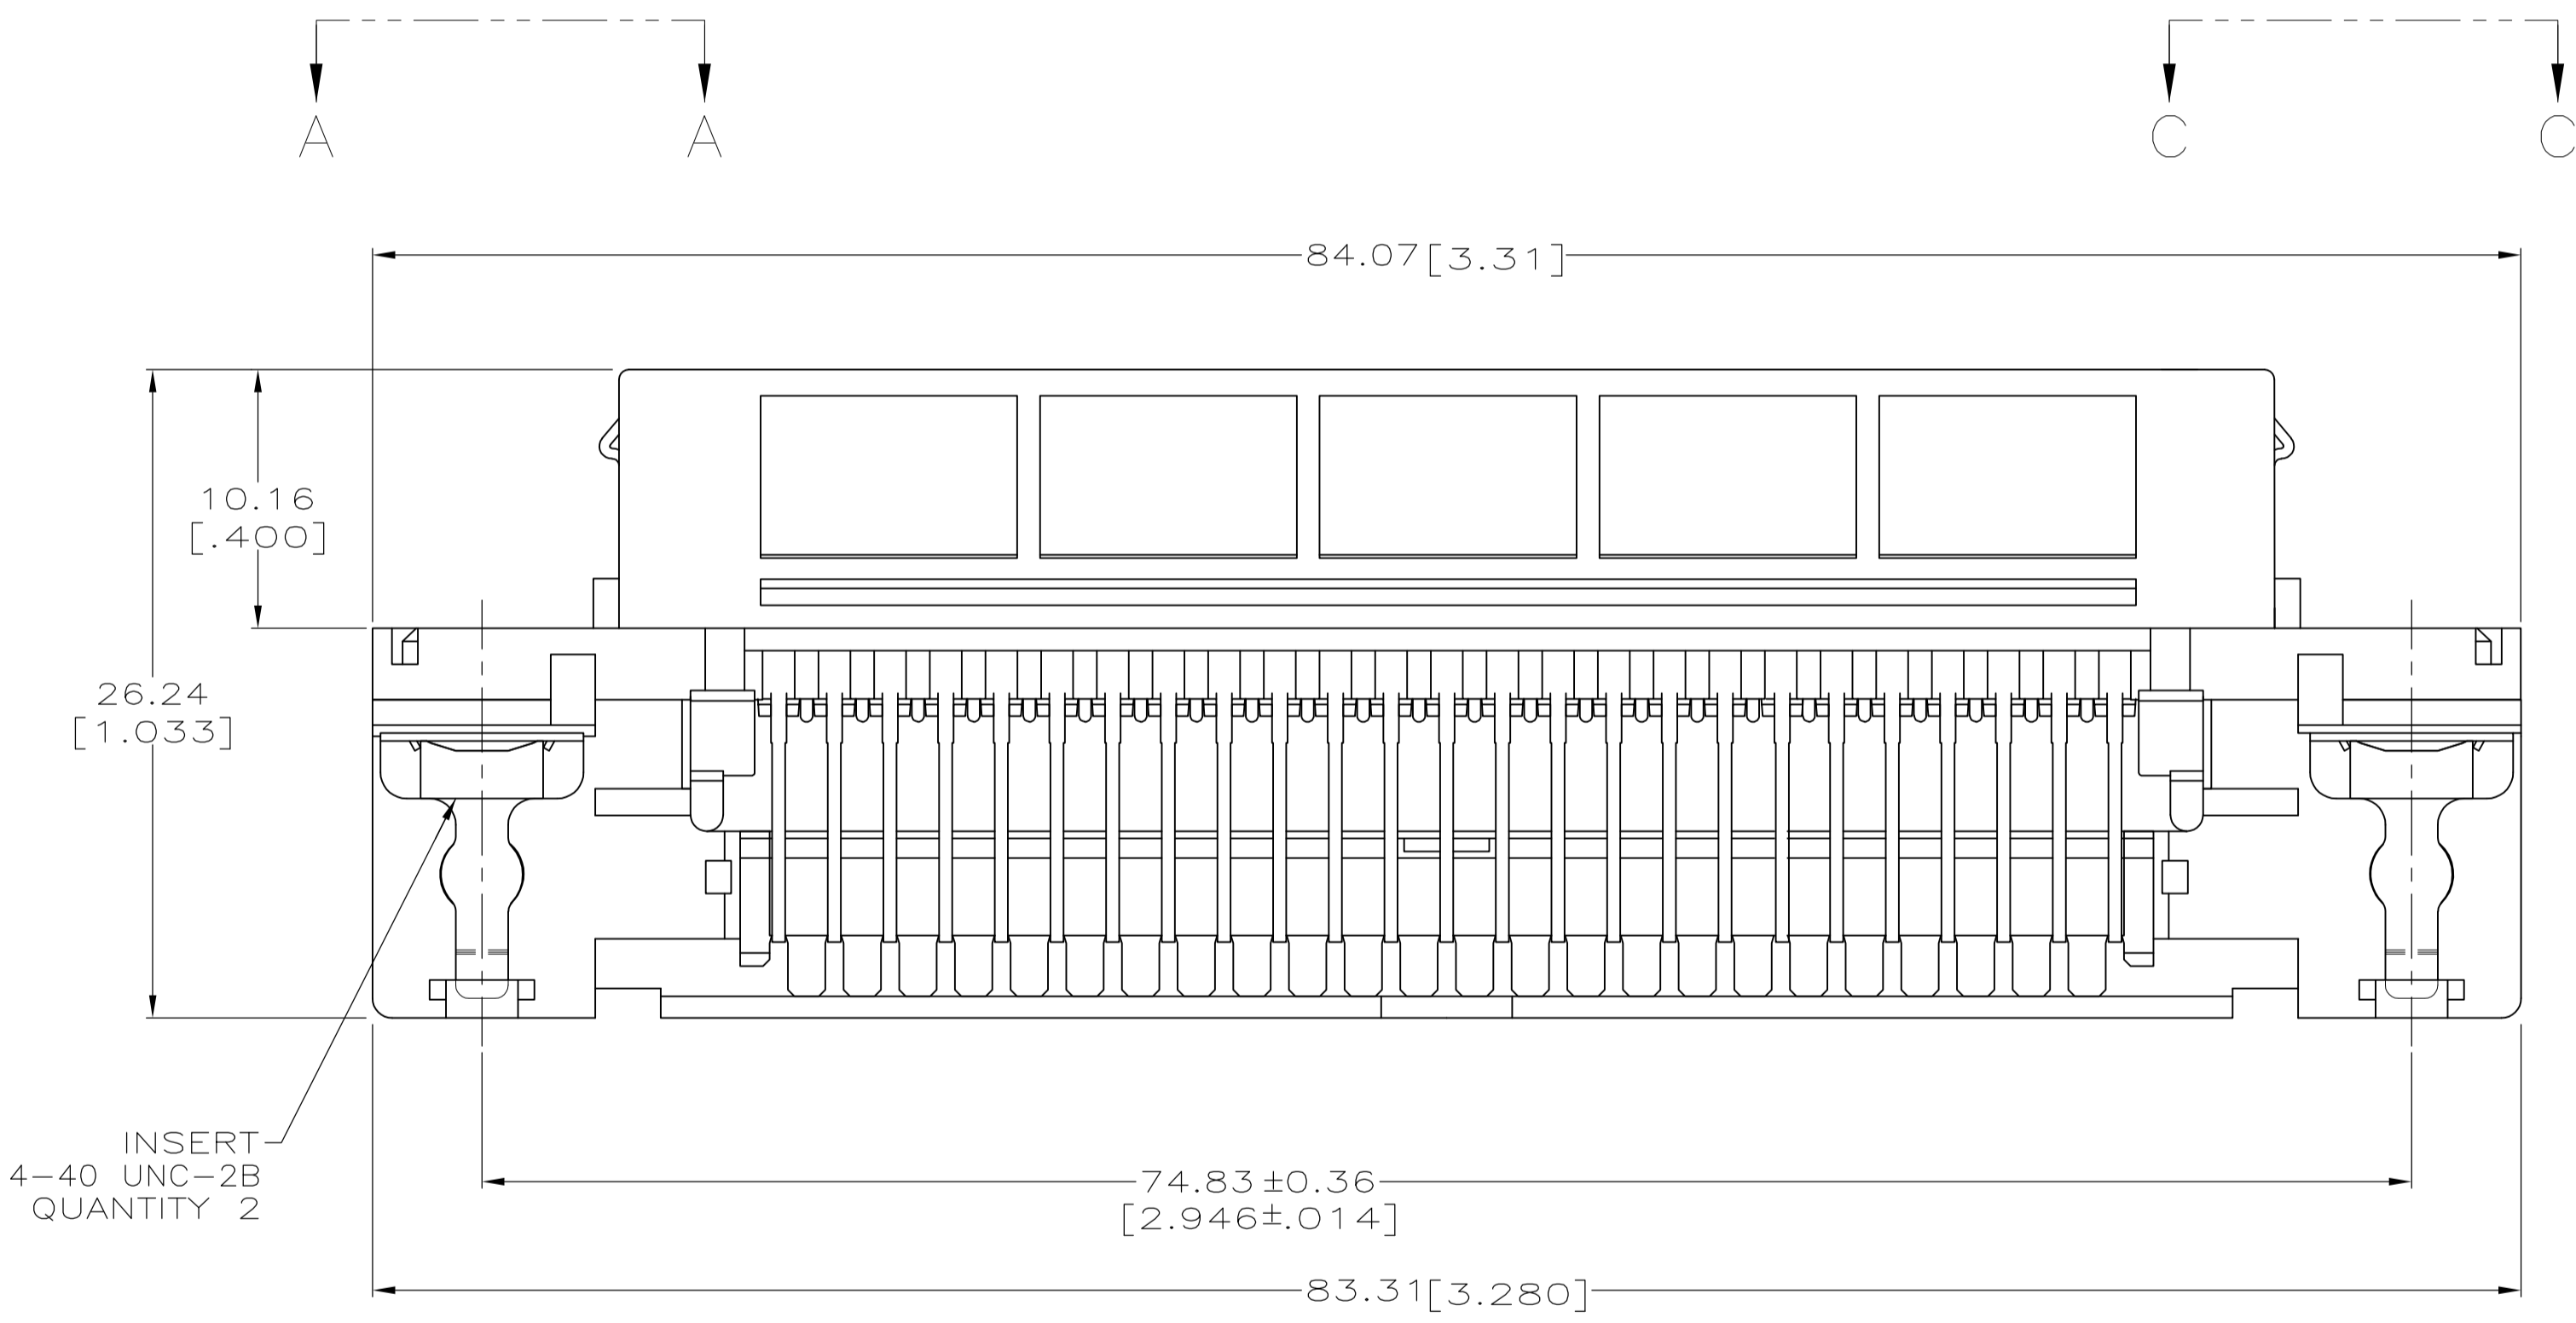

ORIENTATION	DESCRIPTION	PART NUMBER
13	REVERSE, SEE VIEW C-C	6116794-6
13	STANDARD, SEE VIEW A-A	6116794-5
13	REVERSE, SEE VIEW C-C	NO LATCHES
13	REVERSE, SEE VIEW C-C	AS SHOWN
13	STANDARD, SEE VIEW A-A	NO LATCHES
13	STANDARD, SEE VIEW A-A	AS SHOWN

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm (INCHES)	TOLERANCES UNLESS OTHERWISE SPECIFIED:	REVISED BY	DATE	REVISED BY	DATE
0. PLC ± .010	1. PLC ± .005	B. MCMASTER	01SEP05	W. MILLHIMES	01SEP05
1. PLC ± .005	2. PLC ± .005	W. MILLHIMES	01SEP05	W. MILLHIMES	01SEP05
2. PLC ± .005	3. PLC ± .005				
3. PLC ± .005	4. PLC ± .005				
4. PLC ± .005	ANGLES ± .005				

APPROVED: W. MILLHIMES

RECEPTACLE ASSEMBLY, LOW PROFILE, RIGHT ANGLE, 50 POSITION, BOARD LOCK, INTEGRAL LOCKING LATCH, CHAMP

SIZE: A1 | CASE CODE: 00779 | DRAWING NO: 6116794 | RESTRICTED TO: CUSTOMER DRAWING

SCALE: 4:1 | SHEET: 1 OF 1 | REV: B1

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [TE Connectivity](#) manufacturer:*

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [009176003701906](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#)