



TABLE OF DIMENSIONS

| PART DESCRIPTION | D | | P | W | b |
|------------------|--------|--------|--------------|--------------|---|
| | MIN | MAX | | | |
| AT099-10 | .22 | .09 | 1.57 [40] | .033 ± .006 | |
| AT099-11 | .22 | .09 | 1.97 [50] | .033 ± .006 | |
| AT099-12 | .55 | [2.4] | 2.36 [60] | .84 ± .16 | |
| AT099-13 | .39 | | 8.00 [203.2] | | |
| AT099-18 | .31 | .13 | 1.57 [40] | .035 ± .006 | |
| AT099-19 | .31 | .13 | 1.97 [50] | .035 ± .006 | |
| AT099-20 | .80 | [3.2] | 2.36 [60] | .89 ± .16 | |
| AT099-21 | .39 | .19 | 1.57 [40] | | |
| AT099-26 | .39 | .19 | 1.97 [50] | .040 ± .008 | |
| AT099-27 | .39 | .19 | 1.57 [40] | | |
| AT099-28 | [10.0] | [4.8] | 2.36 [60] | [1.02 ± .20] | |
| AT099-29 | .48 | .25 | 1.57 [40] | | |
| AT099-34 | .48 | .25 | 1.97 [50] | .048 ± .008 | |
| AT099-35 | [12.2] | [6.4] | 2.36 [60] | [1.22 ± .20] | |
| AT099-36 | .73 | .37 | 1.57 [40] | | |
| AT099-42 | .73 | .37 | 1.97 [50] | .057 ± .011 | |
| AT099-43 | .73 | .37 | 2.36 [60] | [1.45 ± .28] | |
| AT099-44 | .98 | .50 | 5.91 [150] | | |
| AT099-45 | .98 | .50 | 1.57 [40] | | |
| AT099-50 | [24.9] | [12.7] | 1.97 [50] | [1.78 ± .28] | |
| AT099-51 | 1.48 | .75 | 1.57 [40] | | |
| AT099-58 | [37.5] | [19.0] | 1.97 [50] | [2.41 ± .40] | |
| AT099-59 | | | 2.36 [60] | | |
| AT099-60 | | | | | |

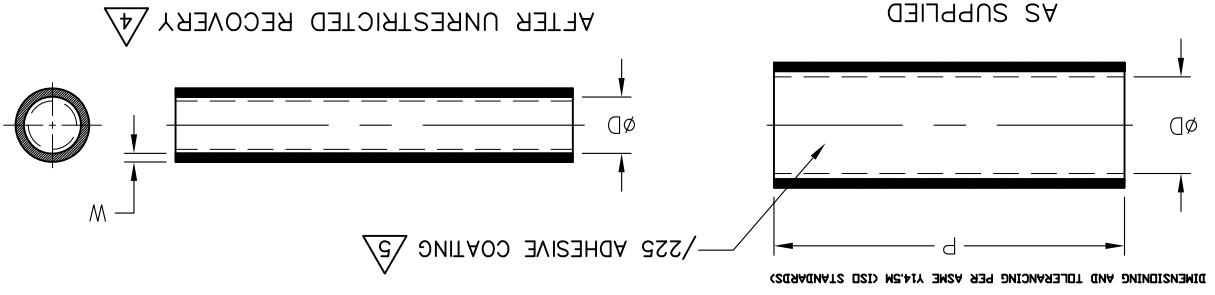

- NOTES:
1. ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].
 2. DIMENSIONS APPEARING IN TABLE ARE AS FOLLOWS:
 a - AS SUPPLIED
 b - AFTER UNRESTRICTED RECOVERY
 3. MATERIAL: TUBING MEETS RT-1116.
 4. AFTER RECOVERY, TUBING WILL HAVE 0% TO -10% LONGITUDINAL CHANGE.
 5. ADHESIVE COATING MEETS RW-2074.
 6. TUBING ENDS COATED WITH ADHESIVE, PART AT099-45 ONLY.



TE Connectivity

STP

HEAT SHRINKABLE TUBING

AT099-XX

DO NOT SCALE THIS DRAWING

SHEET 1 OF 1

© 2010-2012 Tyco Electronics Corporation. All rights reserved.

TYCO ELECTRONICS RESERVES THE RIGHT TO AMEND THIS DRAWING AT ANY TIME WITHOUT NOTICE. THE USER SHOULD EVALUATE THE SIMILARITY OF THE PRODUCT FOR THEIR APPLICATION.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. METRIC DIMENSIONS ARE IN BRACKETS.

DECIMAL TOLERANCES
 .xxx ± 0.005
 .xx ± 0.01
 .x ± 0.1
 .x ± 0.1

ANGLE TOLERANCE
 ° ± 1 DEG.

THIRD ANGLE PROJECTION

APPROVED: UNGUYEN
 DRAWN: DHURRELL

TITLE: HEAT SHRINKABLE TUBING

SIZE: B

CODE IDENT. NO.: 06090

DWG. NO.: AT099-XX

CUSTOMER DRAWING

Raychem Molded Parts

REVISIONS

| LTR | DESCRIPTION | DATE |
|-----|---------------------------|------------|
| C | RELEASE PER ECO-12-006783 | 04/09/2012 |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Heat Shrink Tubing and Sleeves](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[770-006S102](#) [5685710001](#) [CR8248-000](#) [CR9960-000](#) [603312-4](#) [607381P039](#) [617867N001](#) [6500750004](#) [D-306-38](#) [770-003S106W2](#) [770-005S105W1](#) [770-005S106W1](#) [770-007A303](#) [770-010Y106W1](#) [770-010Y706W1](#) [7771210001](#) [MFP-1/4"-Clear](#) [MFP-3/64"-Clear](#) [790-3012](#) [MFT-MT2000-NO.14-0-SP](#) [MHHT-4-15K2-G-104](#) [MIL-LT-1-1/2-4-SP](#) [MIL-LT-1-1/2-9-STK](#) [MIL-LT-1/2-2-STK](#) [MIL-LT-3-0-SP](#) [MIL-LT-3/32-0-SP](#) [MIL-LT-3/32-6-SP](#) [MIL-LT-3/4-6-SP](#) [MIL-LT-3/8-0-SP](#) [8159270001](#) [839602-000](#) [8423-6](#) [FP301-116-6"-Black](#) [FP301-1/2-48"-Black](#) [FP301-12-48"-Black-Hdr](#) [FP301-1/4-48"-Black](#) [FP301-1/4-48"-White-Hdr](#) [FP301-1-6"-Clear](#) [FP301-18-48"-Black-Hdr](#) [FP301-1/8-6"-Black](#) [FP301-18-6"-Black-Bulk](#) [FP301-316-48"-Blue-Hdr](#) [FP301-316-6"-Clear](#) [FP301-332-6"-Black](#) [912229N002](#) [120-126-16BL](#) [121-001-09](#) [121-018-32](#) [121-018-40](#) [121-123-1-1-32BTC](#)