


## CUSTOMER DRAWING

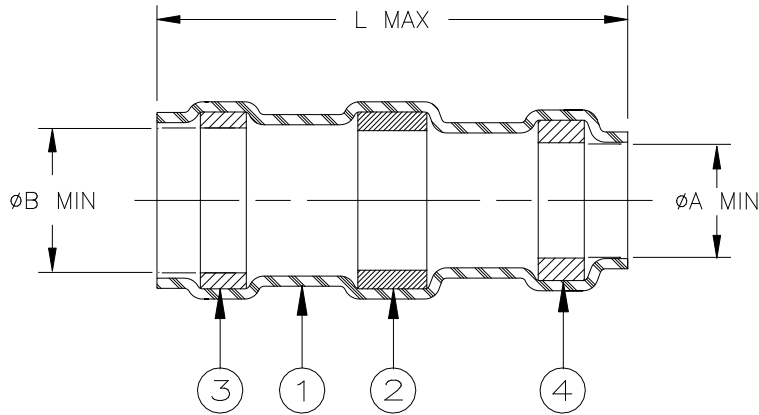

Product Name	Product Dimensions			Cable Dimensions			
	L max	Ø A min	Ø B min	Ø D max	Ø E min	Ø G max	J±0.5 (J±0.02)
D-103-31	20.50 (0.810)	7.10 (0.280)	7.60 (0.300)	7.60 (0.300)	4.0 (0.160)	7.10 (0.280)	7.0 (0.275)


### MATERIALS

1. INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked modified polyvinylidene fluoride.
2. SOLDER PREFORM WITH FLUX:  
SOLDER: TYPE Sn63 per ANSI-J-STD-006.  
FLUX: TYPE ROM1 per ANSI-J-STD-004.
3. MELTABLE RING: Thermally stabilized thermoplastic. Color: blue.
4. MELTABLE RING: Thermally stabilized thermoplastic. Color: natural.


### APPLICATION

1. This part is designed to provide an environment protected shield termination on cables, rated for 125°C minimum, meeting the dimensional criteria listed, having nickel plated copper shields.
2. Install using TE Connectivity/Raychem-approved convection or infrared tools in accordance with Raychem assembly procedure RCPS-100-70.
3. Assemblies will meet requirements of Raychem specification RT-1404 and National Aerospace Standard NAS-1747.
4. Temperature range: -55°C to +150°C.

For best results, prepare the cable as shown:

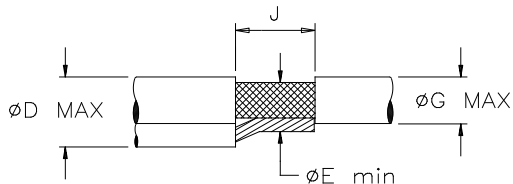

Note:  
Ground lead should be pre-tinned with Sn63 solder.

		<b>Raychem</b> THERMOFIT DEVICES	TITLE: <b>SOLDERSLEEVE* SHIELD TERMINATOR</b>		
Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets]			DOCUMENT NO.: <b>D-103-31</b>		
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A  ROUGHNESS IN MICRON	TE Connectivity reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.	REV :  3	DATE :  17-APR-2020	
DRAWN BY: M. FORONDA	DATE: 22-MAR-99	ECO: ECO-20-005247	SCALE:  NTS	SIZE:  A	SHEET:  1 of 1

© 2020 TE Connectivity Ltd. Family of Companies. All Rights Reserved.

If this document is printed it becomes uncontrolled. Check for the latest revision.

\*TE Connectivity, TE connectivity (logo), Raychem, THERMOFIT, SolderSleeve are trademarks

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Solder & Shield Tubing](#) category:*

*Click to view products by [TE Connectivity](#) manufacturer:*

Other Similar products are found below :

[CTC-0062-20-9/5-9](#) [CTC-0062-22-9/5-9](#) [650076N001](#) [680441-000](#) [D-150-0331CS2902](#) [D-181-1222-90/9CS2800](#) [D-300-01CS1108](#) [982127-1](#) [D-436-0127CS391](#) [D-436-0182CS246](#) [D-436-37CS2651](#) [D-436-58CS246](#) [D-436-61CS246](#) [D-436-82-CS2621](#) [D-750-0005CS2493](#)  
[E53797N001](#) [S200-2-01](#) [S200-4-00CS2904](#) [LSS-81-16AA-CS5575](#) [SO63-2-9036-22CS2677](#) [SO63-3-01CS293](#) [SO63-3-9036-20CS2677](#)  
[SO63-4-9036-20CS2677](#) [SO63-5-9036-22CS2677](#) [CC1525-000](#) [CTA-0025](#) [D-108-01CS227](#) [D-108-07CS436](#) [D-128-0010](#) [D-141-0108CS404](#)  
[D-142-51-202-7754](#) [D-144-41CS1371](#) [D-150-0231-NRCS2896](#) [B-801-18-01](#) [515-9](#) [C67137-000](#) [D-436-36CS2908](#) [D-436-37CS2908](#) [D-436-52CS246](#) [D-436-83CS2705](#) [D-438-0102](#) [LSS-26-8A](#) [427243-000](#) [D-106-2012](#) [D-300-08CS1108](#) [UWCS-2U/7.6-1C/5.8](#) [620026-000](#) [B-004-00](#) [140945-000](#) [NAS1744-3](#)