


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

| LOC | DIST | REVISIONS | | | | | |
|-----|------|-----------|-----|----------------------------|---------|-----|------|
| CF | 39 | P | LTR | DESCRIPTION | DATE | DWN | APVD |
| | | C | | REVISION PER ECO-05-005430 | 14JUL05 | TW | JH |

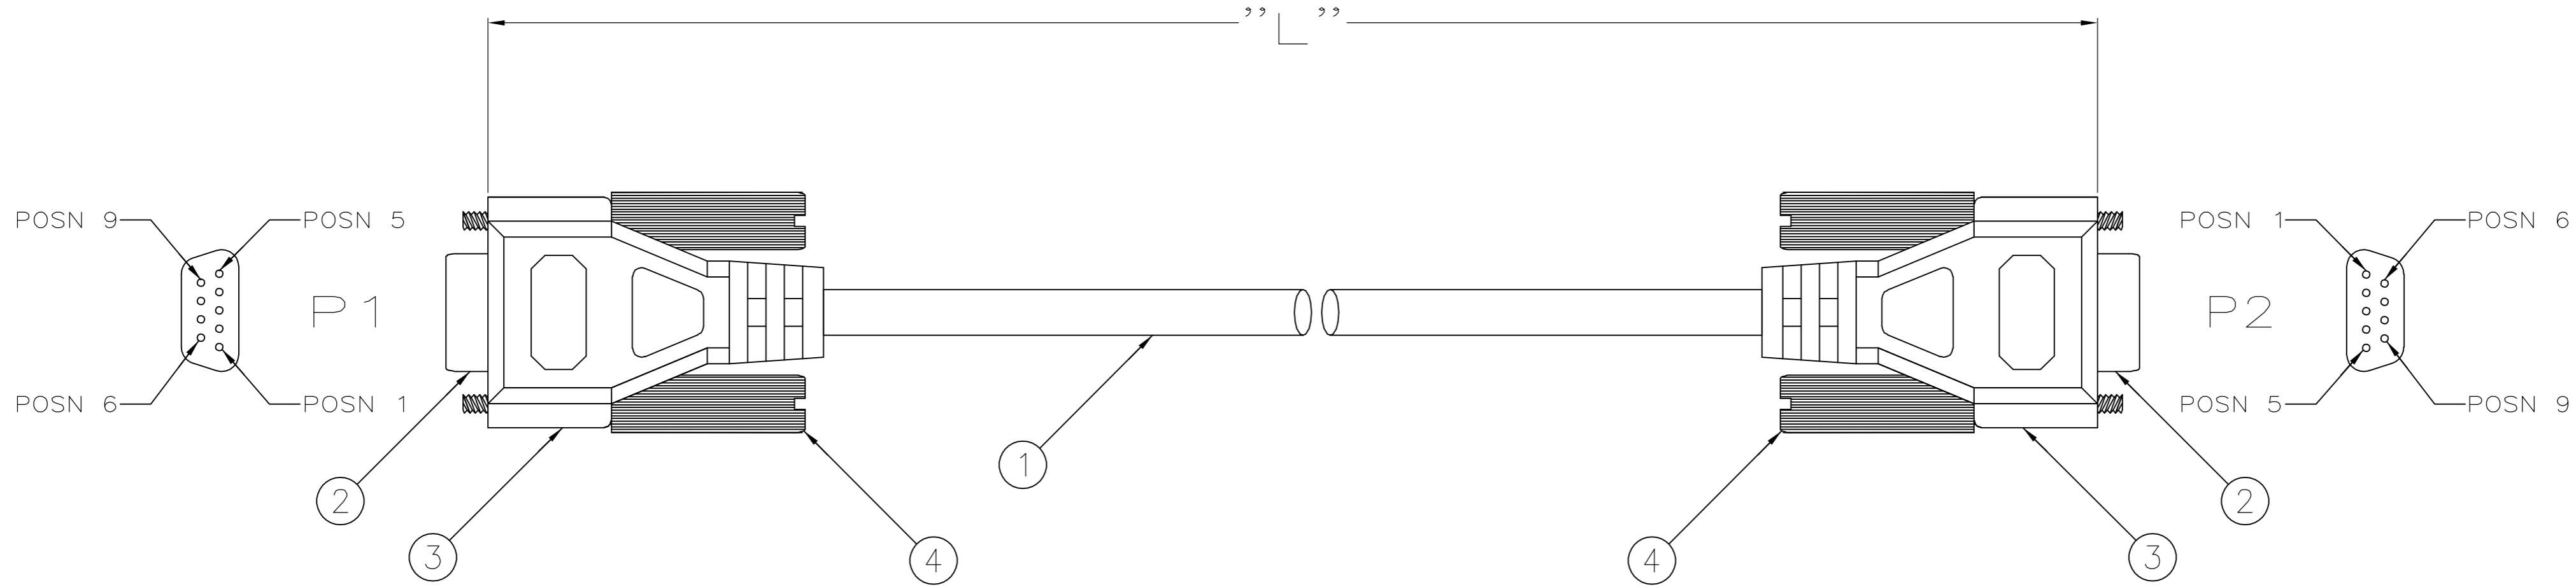

| DB9 F | DB9 F |
|-------|-------|
| P1 | P2 |
| 2 | 3 |
| 3 | 2 |
| 4 | 1 |
| | 6 |
| 5 | 5 |
| 6 | 4 |
| 1 | |
| 7 | 8 |
| 8 | 7 |
| SHELL | SHELL |

| PART NO. | "L"(IN) | TOL.(IN) | LABEL XX' | |
|----------|---------|-------------|-----------|----------|
| 621850-1 | 72.00 | +6.00/-2.00 | 6 | OBSOLETE |
| 621850-2 | 120.00 | +6.00/-2.00 | 10 | |
| 621850-3 | 180.00 | +6.00/-2.00 | 15 | OBSOLETE |

- 1. 28 AWG, STRANDED TINNED COPPER, 7 COND WITH DRAIN, 100% ALUMINUM MYLAR FOIL PLUS 10% NOMINAL OVERLAP, BEIGE.
- 2. PACKAGED IN PRINTED ZIPLOCK POLYBAG.
- 3. LABEL ON POLYBAG TO READ AS FOLLOWS:

| | |
|---|------------------------|
| 621850-__ | PART NO. |
| XX' DB9 F/F NULL MODEM/SERIAL COUNTRY OF ORIGIN | XX' = LENGTH PER TABLE |
- 4. POSN'S 1 & 6 JUMPERED TOGETHER AND CONNECTED TO POSN 4.
- 5. THIS PRODUCT IS PRODUCED IN COMPLIANCE WITH ANSI/ASQC Z1.4-1993, TO AN INSPECTION LEVEL III, WITH A NORMAL SAMPLING PLAN.
- 6. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TYCO ELECTRONICS STANDARD 230-702.

| #4-40 SLOTTED THUMBSCREW | 4 |
|--------------------------|----------|
| OVERMOLD, PVC, BEIGE | 3 |
| CONNECTOR, DB9, FEMALE | 2 |
| CABLE, 7 CONDUCTOR | 1 |
| DESCRIPTION | ITEM NO. |

| | | | | | | |
|---|--|---|---|--------------------|------------------------|--------------------|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | DWN D.EISENTRAUT 11-20-96 | Tyco Electronics Corporation Harrisburg, Pa 17105-3608 | | | |
| DIMENSIONS: INCHES | | CHK D.WILSON 11-21-96 | | | | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED: | | APVD R.CAPP 11-21-96 | NAME CABLE ASSY, DB9 TO DB9 (FEMALE), OVERMOLDED | | | |
| 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± - FINISH - | | PRODUCT SPEC - APPLICATION SPEC - WEIGHT - | SIZE A2 | CAGE CODE 00779 | DRAWING NO C=621850 | RESTRICTED TO - |
| MATERIAL - | | RESTRICTED CUSTOMER | SCALE N.T.S | SHEET 1 | OF 1 | REV C |

621850

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for D-Sub Cables category:

Click to view products by TE Connectivity manufacturer:

Other Similar products are found below :

[CS-DSSMDB25MF-002.5](#) [CS-DSDMDB50MM-010](#) [CS-DSSMDB15MM-010](#) [73-6210-MF-10](#) [1200980067](#) [RB09P09P-006](#) [RB09P09P-012](#)
[RB15P15P-006](#) [RB25P25P-006](#) [RB25P25P-012](#) [RB37P37P-024](#) [1300-00032](#) [14526-EZHB-200-0QC \(RC\)](#) [172-0906](#) [SDB15P15S-060](#)
[SDB37P37S-012](#) [SHD15P15S-012](#) [SHD15P15S-036](#) [SHD15P15S-060](#) [177-710-1-9S6K7-24MNN](#) [ACL-10137-2MM](#) [RB09P09P-024](#)
[319285-3](#) [CS-DSDMDB15MM-015](#) [CS-DSSMDB15MF-005](#) [33662132000066](#) [RS422-OM2](#) [SDB09P09S-060](#) [SDB25P25S-060](#)
[SHD26P26S-060](#) [SHD44P44S-036](#) [73-6210MM-25](#) [CS-DSPMDB09MF-006](#) [CS-DSNL4259MF-010](#) [CS-DSDMDB25MF-005](#) [CS-](#)
[DSSMDB9MF0-025](#) [49725A 060S2](#) [CS-DSDMDB50MF-002.5](#) [CS-DSDMDB50MF-050](#) [CS-DSDMDB37MM-005](#) [1700091800](#) [CS-](#)
[DSDMDB50MF-025](#) [CS-DSDMDB37MM-015](#) [CS-DSPMDB09MF-010](#) [CS-DSDMDB50MM-002.5](#) [CS-DSSMDB37MM-025](#) [CS-](#)
[DSDMDB50MM-005](#) [CS-DSSMDB9MF0-002.5](#) [CS-DSPMDB25MM-010](#) [CS-DSPMDB25MF-010](#)