

SPECIFICATION CONTROL DRAWING

55PC2212

TITLE

ONE CONDUCTOR CABLE, FLAT BRAID SHIELDED, JACKETED, 600 VOLT


Date

1-12-96

Revision

B

This specification sheet forms a part of the latest issue of Raychem Specification 55PC.

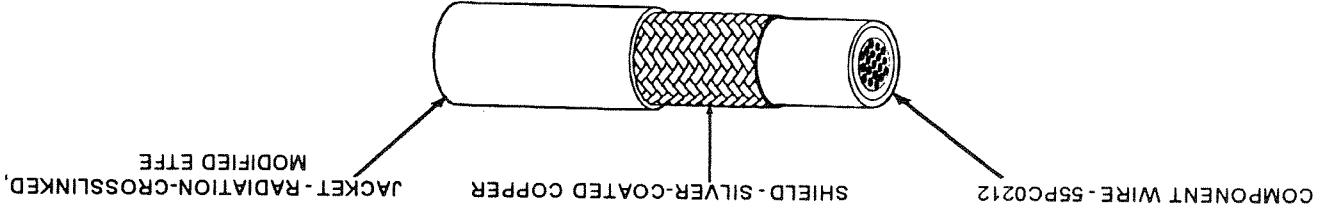

CONSTRUCTION DETAILS

PART NUMBER	CONDUCTOR SIZE (AWG)	SHIELD STRAND THICKNESS (± .0004)	JACKET THICKNESS (in.)		DIAMETER (in.)		UPPER SPEC LIMIT	TARGET VALUE	WEIGHT (lbs/1000 ft.)
			LOWER SPEC LIMIT	TARGET VALUE	UPPER SPEC LIMIT	TARGET VALUE			
55PC2212-26*	26	.0015	.0055	.0070	.052	.056	.060	3.25	3.57
55PC2212-24*	24	.0015	.0055	.0070	.056	.060	.064	3.84	4.18
55PC2212-22*	22	.0015	.0055	.0070	.062	.066	.070	4.99	5.36
55PC2212-20*	20	.0015	.0055	.0070	.070	.075	.079	6.81	7.24
55PC2212-18*	18	.0015	.0055	.0070	.080	.084	.088	9.39	9.92
55PC2212-16*	16	.0015	.0055	.0070	.087	.092	.096	11.46	12.04
55PC2212-14*	14	.0015	.0055	.0070	.102	.107	.111	16.58	17.29
55PC2212-12*	12	.0015	.0060	.0075	.122	.127	.132	24.31	25.19
55PC2212-10*	10	.0015	.0060	.0075	.145	.151	.156	36.71	38.07

CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 200°C
 Maximum continuous conductor temperature
 VOLTAGE RATING: 600 volts (rms)
 DIELECTRIC WITHSTAND: 1500 volts (rms), 60 Hz
 CROSSLINK VERIFICATION: 300 ± 3°C for 1 hour
 JACKET COLOR: White preferred
 JACKET ELONGATION AND TENSILE STRENGTH:
 Elongation, 50% (minimum)
 Tensile Strength, 5000 lbf/in² (minimum)
 JACKET FLAWS:
 Spark Test, 1000 volts (rms), 60 Hz, 100% test
 Impulse Dielectric Test, 6.0 kV (peak), 100 % test

SHIELD COVERAGE: 85% (minimum)
 VOLTAGE WITHSTAND TEST (POST ENVIRONMENTAL):
 1000 volts (rms), 60 Hz, 1 minute

PART NUMBER:
 The "****" in the part numbers above shall be replaced by a color code designator with a dash separating the component wire color from the jacket color.
 Example: AWG 24, white component wire;
 white jacket: 55PC2212-24-9-9

COLOR AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681

THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN, REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF BIDDING FOR BID.



Raychem Corporation
 300 Constitution Drive, Menlo Park, Cal 94025
 1-800-2-Raychem Fax: 1-415-361-6287

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Multi-Conductor Cables](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[89182-010-1000](#) [89705-008-500](#) [6000FE-877-1000](#) [CS2885-000](#) [M27500-20SP2S23](#) [6300FE-877-U1000](#) [6309UE-877-1000](#) [M3905-BK005](#)
[6502FE 8771000](#) [6541PA-008-U1000](#) [CV6807-000](#) [CW9530-000](#) [CX6543-000](#) [CXA-0066-20-4-9CS2973](#) [CXA-0078-16-1-9CS2405](#) [CXA-](#)
[0078-22-4-9CS2405](#) [CXA-0078-24-4-9CS2405](#) [CXA-0140-16-6/9-9CS2405](#) [CY0660-000](#) [720451-000](#) [752687-000](#) [768146-000](#) [773159-000](#)
[82841-877-5000](#) [83318E-009-500](#) [8348-060-500](#) [83559-002-1000](#) [83653-002-5000](#) [83659-002-1000](#) [83709-002-1000](#) [8404-060-500](#) [8469](#)
[060100](#) [858171-000](#) [8628-060-500](#) [868361-001](#) [8730-060-1000](#) [8737-060-U1000](#) [8747-060-100](#) [8747-060-1000](#) [8769-060-1000](#) [8775-060-](#)
[500](#) [8780-060-1000](#) [8782-001-U1000](#) [88444-002-1000](#) [9159-060-500](#) [939870-000](#) [9423 060U500](#) [9444 060U1000](#) [9497 0001000](#) [9515-060-](#)
[1000](#)