

CABLE, ELECTRIC, RADIATION-CROSSLINKED, EXTRUDED, MODIFIED, FLUOROPOLYMER-INSULATED,  
ONE CONDUCTOR, SHIELDED, JACKETED, LIGHTWEIGHT


150°C

The complete requirements for procuring the cable described herein shall consist of this document and the issue in effect of Raychem Specification 55A.

COMPONENT WIRE - 55A6359

SHIELD - TIN-COATED COPPER

JACKET - RADIATION-CROSSLINKED,  
MODIFIED ETFE

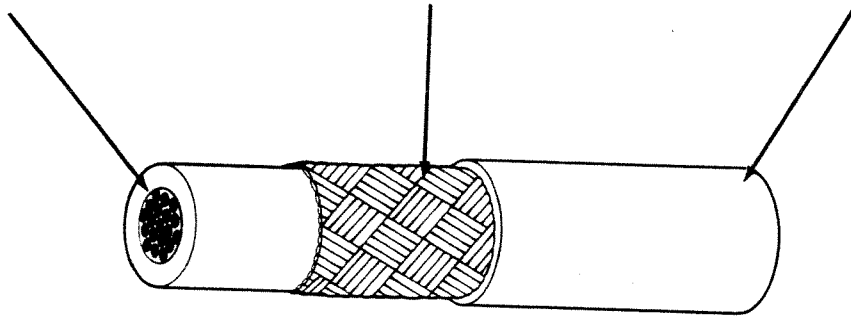

CABLE CONSTRUCTION DETAILS							
PART NUMBER	CONDUCTOR SIZE (AWG)	SHIELD SIZE (AWG)	JACKET THICKNESS (in.)		OUTSIDE DIAMETER (in.)		MAXIMUM WEIGHT (lb/1000 ft.)
			MINIMUM	NOMINAL <sup>1/</sup>	NOMINAL <sup>1/</sup>	MAXIMUM	
55A6376-26-*	26	38	.006	.008	.065	.070	4.6
55A6376-24-*	24	38	.006	.008	.070	.075	5.5
55A6376-22-*	22	38	.006	.008	.076	.081	6.9

<sup>1/</sup> Nominal values are for information only. Nominal values are not requirements.

(A)

CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 150°C  
 Maximum continuous conductor temperature  
 VOLTAGE RATING: 600 volts (rms)  
 ACCELERATED AGING: 300 ± 3°C for 7 hours  
 CYCLING: 200 ± 3°C for 6 hours  
 ELECTRIC WITHSTAND: 1500 volts, 60 Hz  
 FLAMMABILITY:  
 Procedure 1, 3 seconds (maximum); 3 in. (maximum);  
 no flaming of facial tissue  
 JACKET COLOR: White preferred  
 JACKET ELONGATION AND TENSILE STRENGTH:  
 Elongation, 100% (minimum)  
 Tensile Strength, 5000 psi (minimum)  
 JACKET FLAWS:  
 Spark Test, 1000 volts, 60 Hz (rms), 100% test  
 Impulse Dielectric Test, 6.0 kV (peak), 100% test  
 LIFE CYCLE: 200 ± 3°C for 168 hours

LOW TEMPERATURE-COLD BEND: -65 ± 2°C for 4 hours  
 SHIELD COVERAGE: 85% (minimum)  
 THERMAL SHOCK: 300 ± 3°C for 6 hours  
 VOLTAGE WITHSTAND TEST: (After Accelerated Aging, Immersion, Life Cycle, Low Temperature-Cold Bend, and Thermal Shock) 1000 volts, 60 Hz, 1 minute

PART NUMBER:  
 The "\*" in the part numbers above shall be replaced by color code designators in accordance with MIL-STD-681 with a dash separating the component wire color from the jacket color.

Example:  
 AWG 24, white component wire, white jacket:  
 55A6376-24-9-9.

THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.  
 REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

**Raychem**

Raychem Corporation  
 300 Constitution Drive, Menlo Park, California 94025-1165  
 415/ 361 3333 TWX 910 373 1728

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Hook-up Wire](#) category:*

*Click to view products by [TE Connectivity](#) manufacturer:*

Other Similar products are found below :

[002333-000](#) [M81044/12-22-6](#) [M81044/9-8-9](#) [743094-001](#) [81044/12-18-9CS3209](#) [ATFC0311-20-5D](#) [EF5675-000](#) [BFWUL3239-24-PINK](#)  
[22759/34-16-9CS2621](#) [22759/42-24-9CS2620](#) [933205-000](#) [30802-009-250](#) [99M0111-20-2](#) [A00594-000](#) [190571-000](#) [22759/41-12-9CS2620](#)  
[22759/41-16-9CS2620](#) [22759/43-10-9CS2873](#) [CM9524-000](#) [31510-010-250](#) [34401-010-250](#) [34402-010-500](#) [M81044/9-4-9](#) [391441-BK007](#)  
[400R0111-10-9](#) [431660-000](#) [ATFC0311-20-0](#) [44/7024-26-9-9](#) [44A0112-22-9CS3184](#) [BFW-UL3239-24-WHITE](#) [55/0312-26-6L-CS2570](#)  
[55A0811-12-9](#) [55A6087-20-9-9-9](#) [55A7400-22-9/96-9CS2275](#) [55A9002-30-5](#) [55PC0211-20-5CS2502](#) [55PC0811-6-9CS2637](#) [55PC1211-22-](#)  
[9-9CS3278](#) [C07683-000](#) [34020-008-2000](#) [391850-BK199](#) [392075-RD199](#) [W28-6HU](#) [44A0112-24-9CS3184](#) [44A0211-16-8-1KF/1](#)  
[44A0211-16-9CS3030](#) [084299-000](#) [100E0111-0.50-9](#) [100E0111-0.75-9](#) [10603-0-0CS1803](#)