


REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
	AG	REVISED PER ECO-12-012320	04JUL12	MZ
	AH	REVISED PER ECO-16-017885	06OCT2017	RS
	MZ			MZ

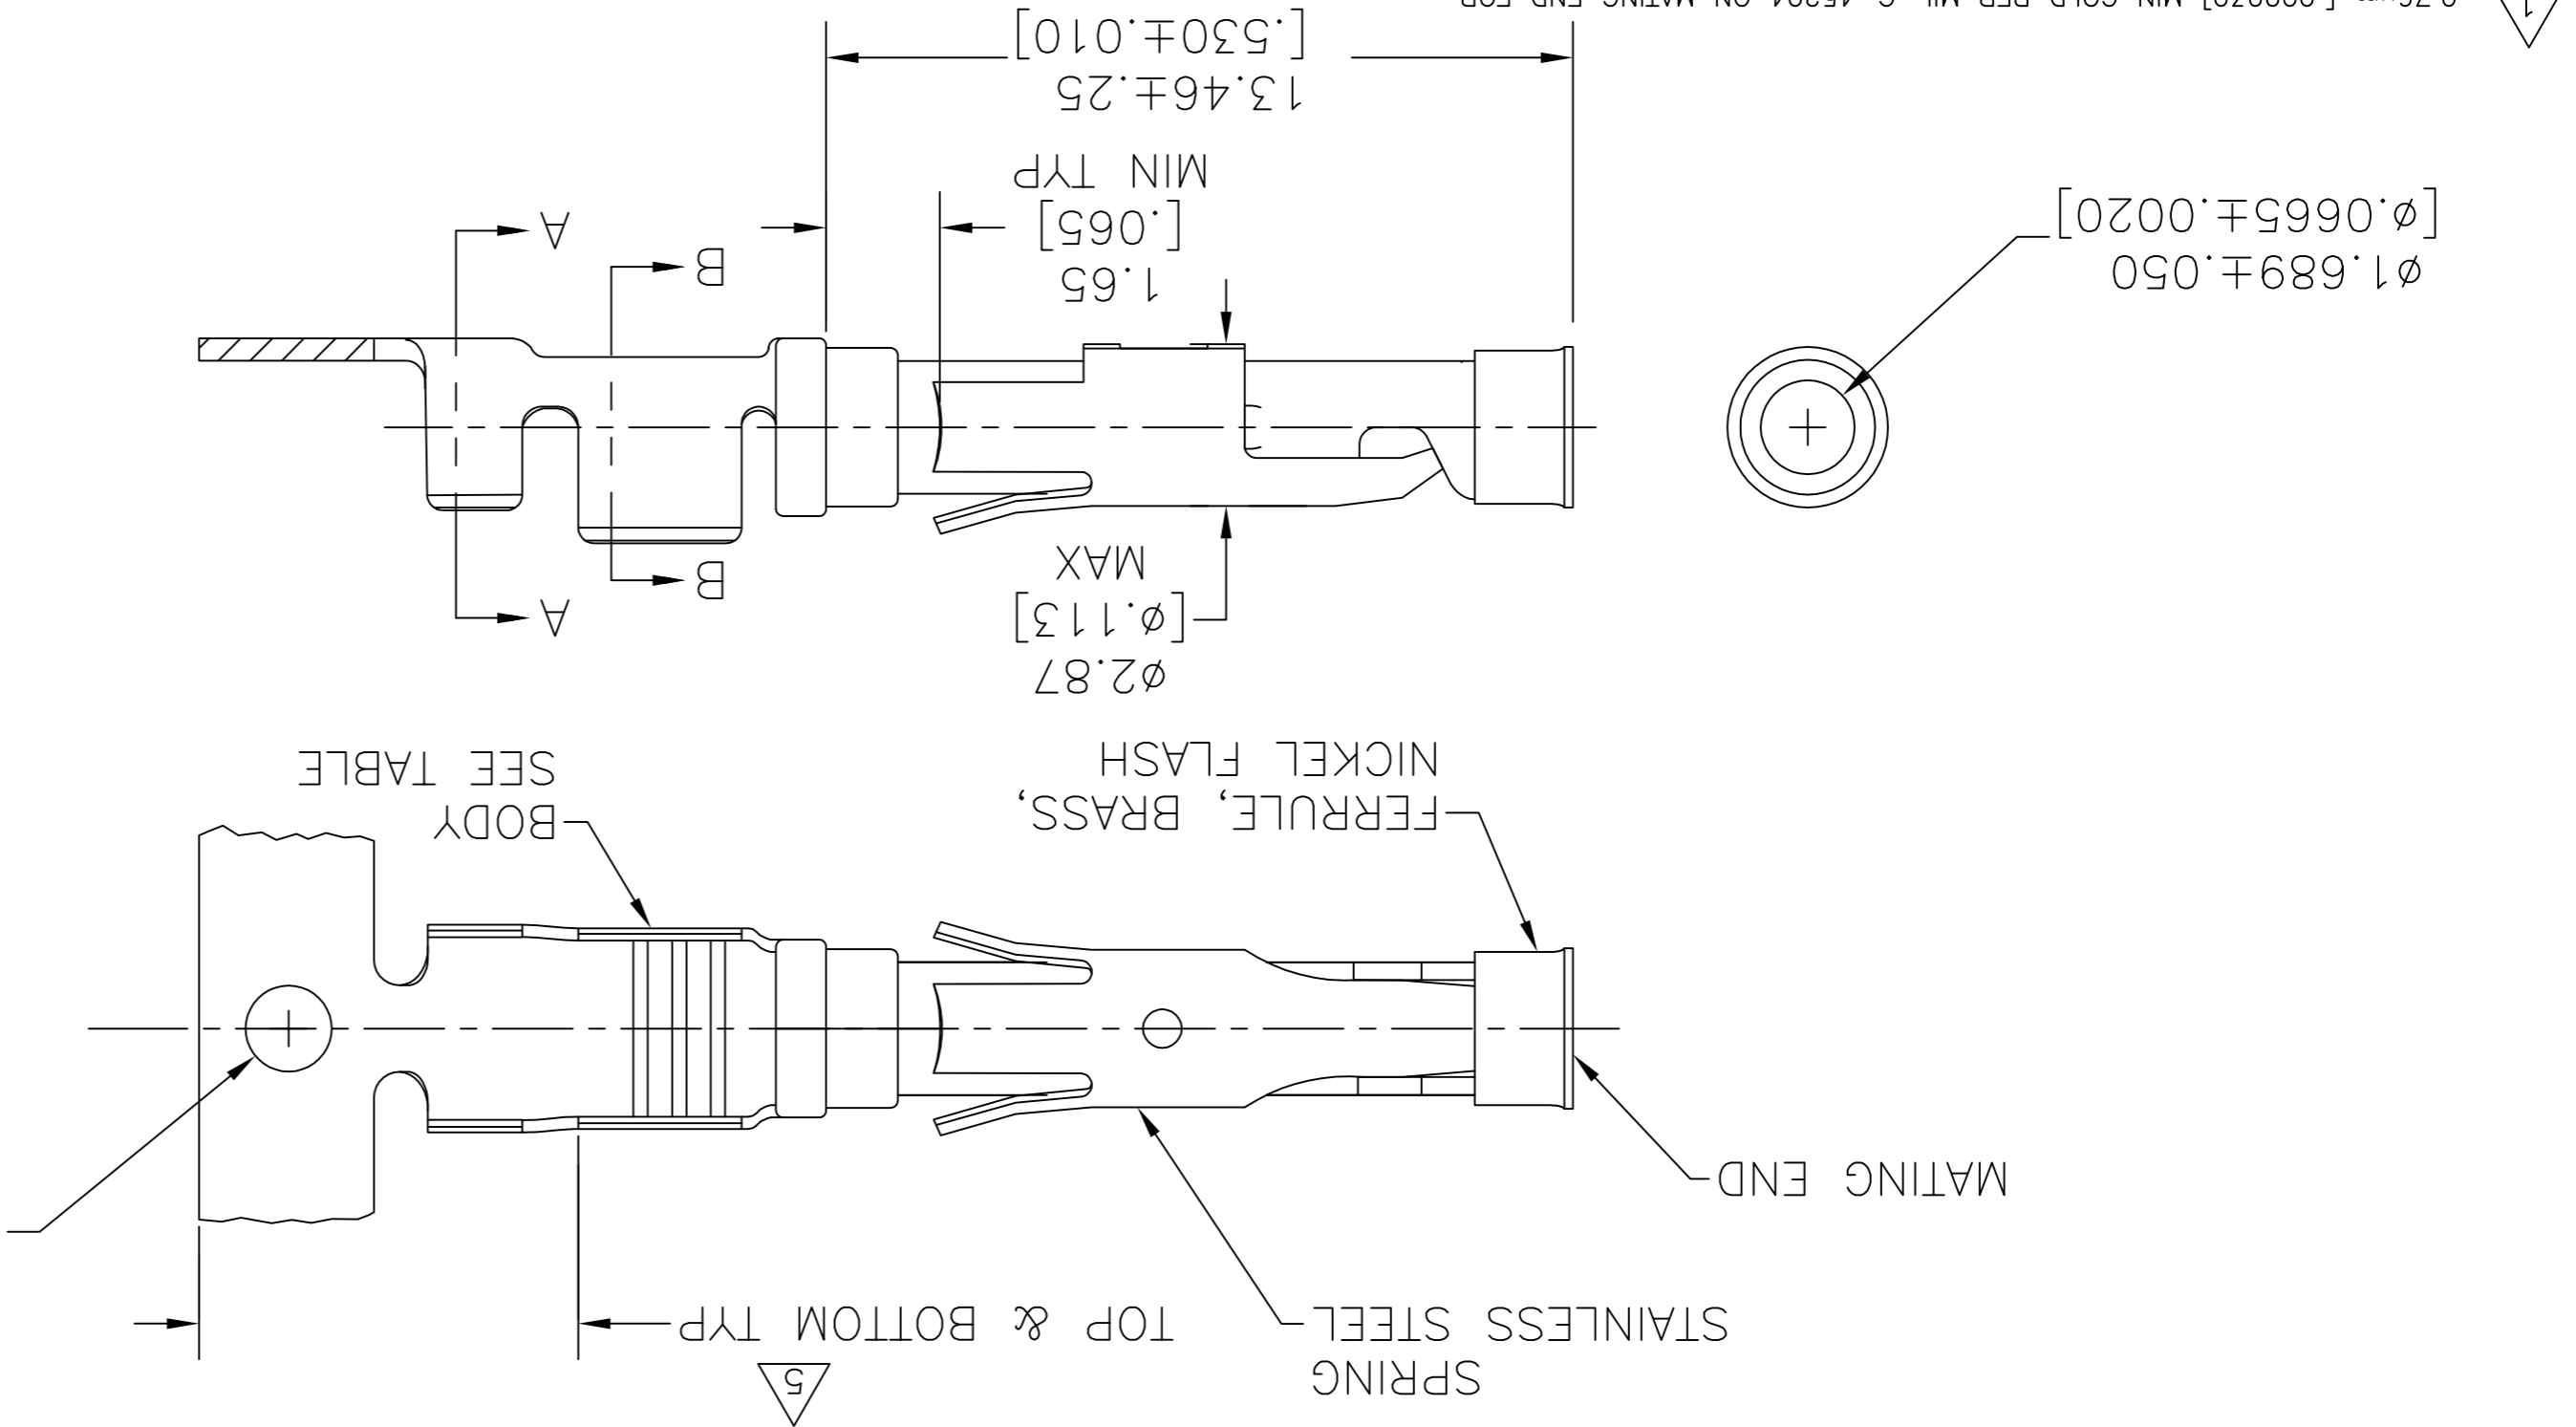

1 $0.76\mu\text{m}$ [0.00030] MIN GOLD PER MIL-G-45204 ON MATING END FOR A LENGTH OF 5.08 [2.00] MIN WITH GOLD FLASH ON THE REMAINDER OVER 0.76 μm [0.00030] MIN NICKEL PER QQ-N-290.

2 $1.27\mu\text{m}$ [0.00050] MIN TIN-LEAD PER MIL-T-10727 OVER 0.76 μm [0.00030] MIN NICKEL PER QQ-N-290.

3 $0.76\mu\text{m}$ [0.00030] MIN GOLD PER MIL-G-45204 ON MATING END FOR A LENGTH OF 5.08 [2.00] MIN WITH A UNIFORM GRADIENT TO 0.25[0.00010] NICKEL PER QQ-N-290.

4 $0.38\mu\text{m}$ [0.00015] MIN GOLD PER MIL-G-45204 ON MATING END FOR A LENGTH OF 5.08 [2.00] MIN, $1.27\mu\text{m}$ [0.00050] MIN TIN-LEAD PER MIL-T-10727 FOR A LENGTH OF 5.69 [2.24] MIN ON OPPOSITE END, BOTH OVER $1.27\mu\text{m}$ [0.00050] MIN NICKEL PER QQ-N-290 ON ENTIRE CONTACT.

5 GOLD PLATING NEED NOT APPEAR IN THIS AREA.

6 REVERSE REELED FOR MINI-APPLICATOR.

7 WIRE RANGE 18-16 AWG. INSULATION RANGE 2.03[.080]-2.54[.100].

8 $0.38\mu\text{m}$ [0.00015] MIN GOLD PER MIL-G-45204 ON MATING END FOR A LENGTH OF 5.08 [2.00] MIN, $1.27\mu\text{m}$ [0.00050] MIN TIN-LEAD PER MIL-T-10727 FOR A LENGTH OF 5.69 [2.24] MIN ON OPPOSITE END, BOTH OVER $1.27\mu\text{m}$ [0.00050] MIN NICKEL PER QQ-N-290 ON ENTIRE CONTACT.

9 $1.27\mu\text{m}$ [0.00050] MIN TIN PER MIL-T-10727 OVER 0.6 μm [0.00030] MIN NICKEL PER QQ-N-290.


10 $2.54\mu\text{m}$ [0.00100] MIN SILVER OVER 0.76 μm [0.00030] MIN NICKEL PER QQ-N-290.

11 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

12 $0.76\mu\text{m}$ [0.00030] MIN GOLD PER MIL-G-45204 ON MATING END FOR A LENGTH OF 5.08 [2.00] MIN WITH $1.27\mu\text{m}$ [0.00050] MIN MATTE TIN PLATE IN WIRE CRIMP AREA, BOTH OVER 0.76 μm [0.00030] MIN NICKEL PER QQ-N-290.

MATERIAL		SEE CALLOUTS	
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:	
APVD: G. STEINHÄUER		CHK: G. STEINHÄUER	
NAME: G. STEINHÄUER		DATE: 23JUL03	
PRODUCT SPEC: SOCKET ASSEMBLY, .062, TYPE III+		DRAWING NO: 66358	
APPLICATION SPEC: TE Connectivity		SCALE: 8:1	
WEIGHT: -		SHEET: 1 OF 1	
FINISH: 0 P/LC ±, 1 P/LC ±, 2 P/LC ±, 3 P/LC ±, 4 P/LC ±		REV: AH	

REELING	BODY FINISH	BODY MATERIAL	LOOSE PIECE	PART NO.
STANDARD	3	BRASS	66360-1	66358-1
STANDARD	2	BRASS	66360-2	66358-2
STANDARD	4	BRASS	66360-3	66358-3
STANDARD	13	BRASS	66360-4	66358-4
STANDARD	3	BRASS	66360-1	66358-5
STANDARD	2	BRASS	66360-2	66358-6
STANDARD	4	BRASS	66360-3	66358-9
STANDARD	2	BRASS	66360-4	1-66358-0
OBsolete	6	PHOSPHOR BRONZE	66360-7	1-66358-2
OBsolete	6	PHOSPHOR BRONZE	66360-8	1-66358-3
SUP BY 1-66358-6				
OBsolete	6	BRASS	66360-9	1-66358-5
OBsolete	6	BRASS	1-66360-2	1-66358-6
STANDARD	9	BRASS	1-66360-2	1-66358-7
STANDARD	9	PHOSPHOR BRONZE	-	1-66358-8
STANDARD	1	CU-NI ALLOY	1-66360-4	1-66358-9
STANDARD	2	CU-NI ALLOY	1-66360-5	2-66358-0
STANDARD	9	CU-NI ALLOY	1-66360-6	2-66358-1
OBsolete	6	BRASS	-	2-66358-2
OBsolete	6	BRASS	-	2-66358-3

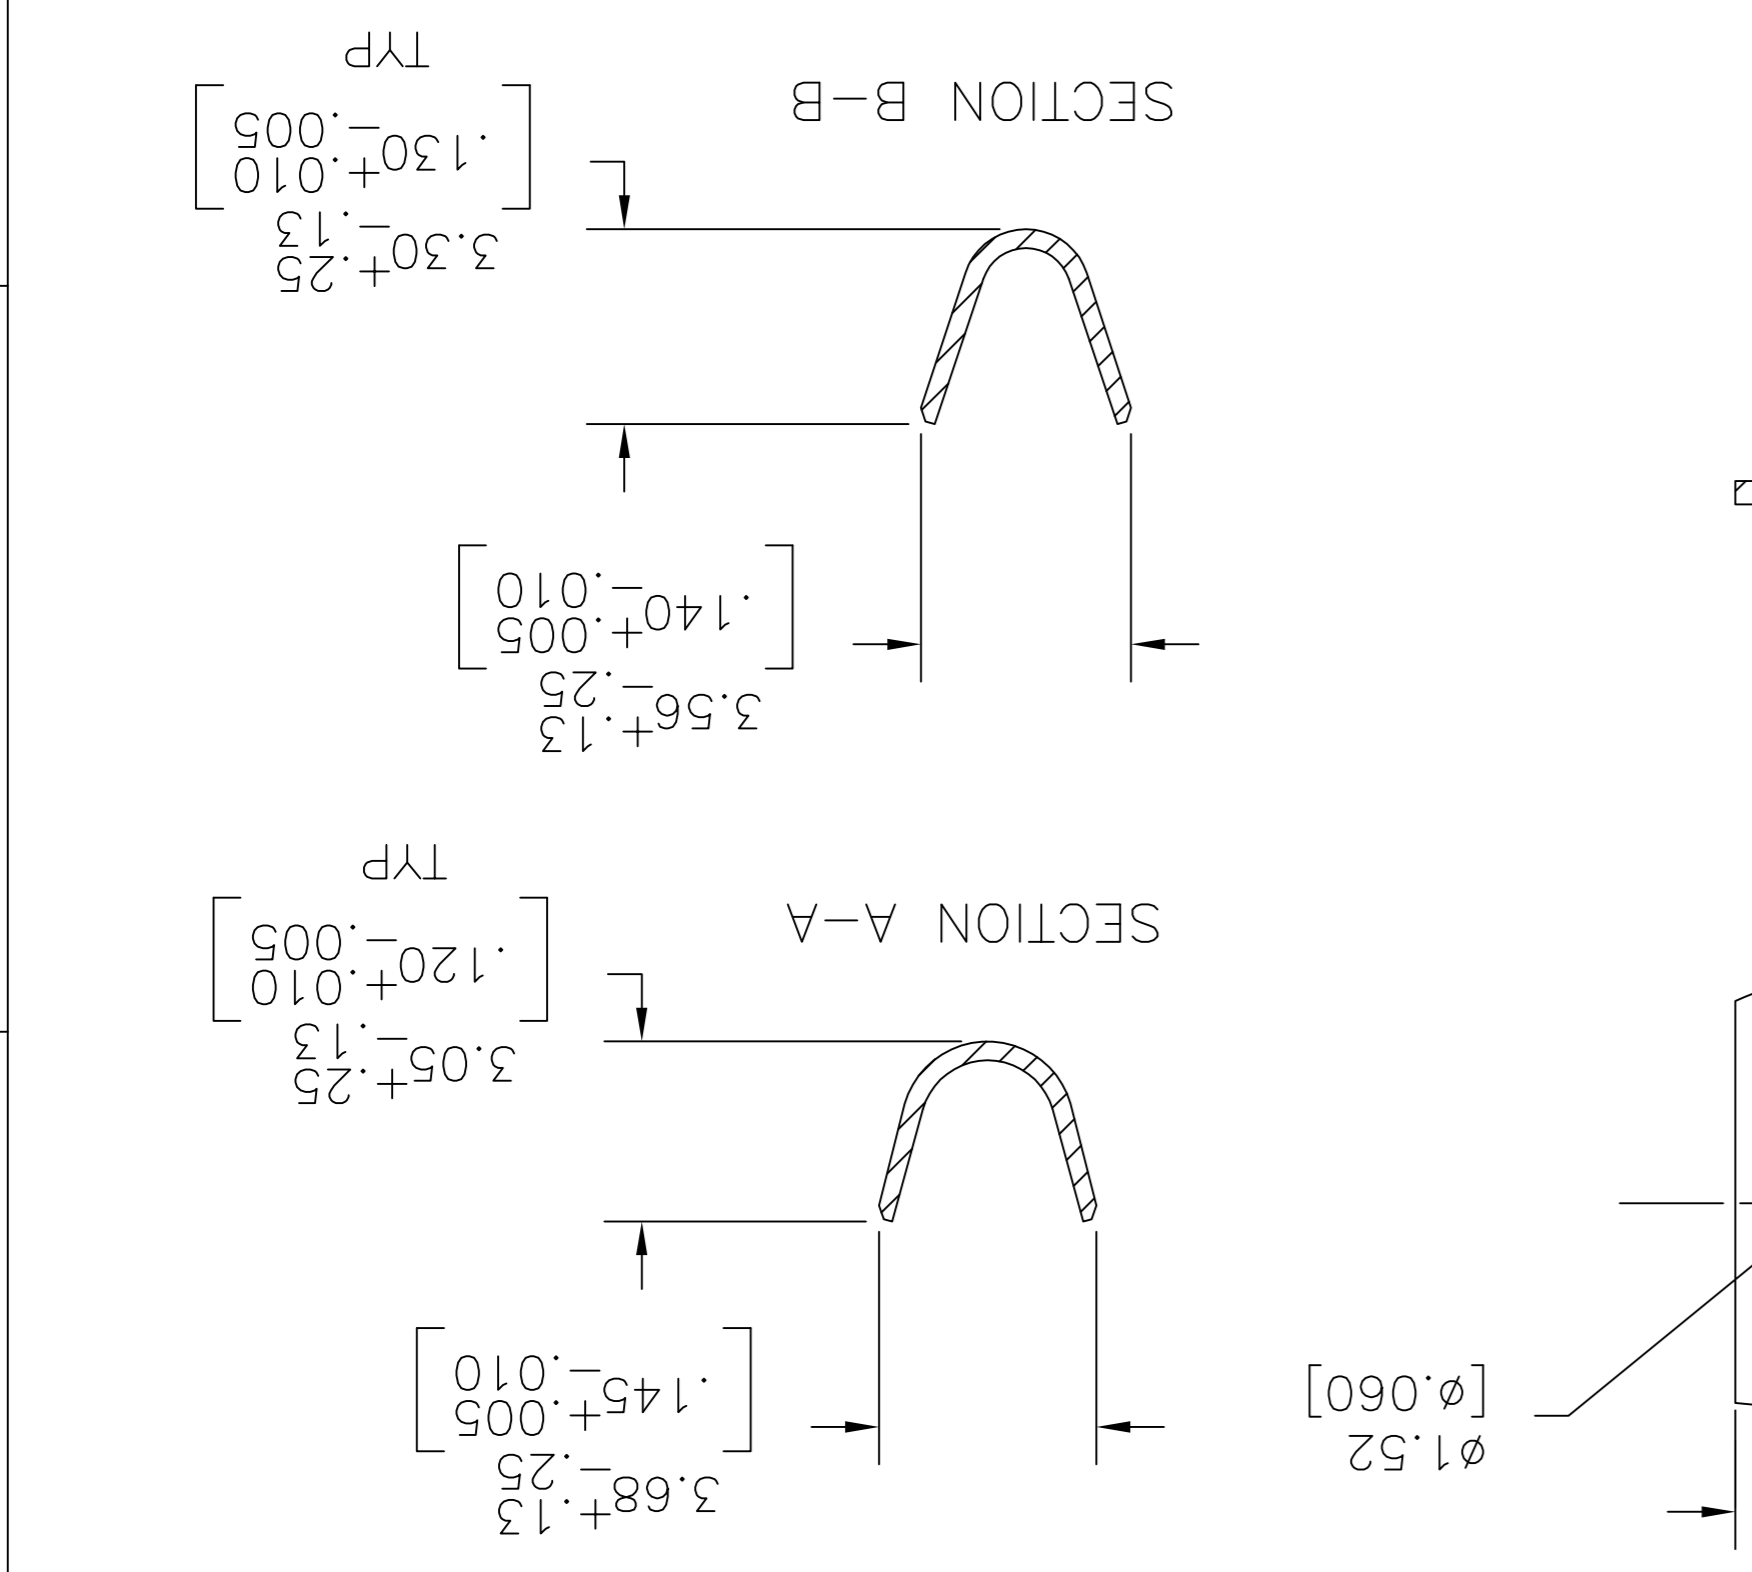

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Heavy Duty Power Connectors](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[1424439](#) [1424438](#) [09330062652](#) [2-8675P1](#) [580129-2](#) [605601-1](#) [6340G1](#) [6341G1](#) [6360G1](#) [6373G1](#) [6374g2](#) [6396G1](#) [647757-1](#) [66394-4](#)
[6643411-1](#) [6646058-2](#) [6646137-1](#) [6646138-1](#) [6646348-1](#) [6646479-1](#) [6646608-1](#) [6646786-1](#) [6646940-1](#) [6651091-1](#) [6651525-1](#) [6651529-1](#)
[6651778-1](#) [6651788-1](#) [696465-1](#) [696475-1](#) [73000005059](#) [73000005349](#) [73000005642](#) [73080255059](#) [73080965046](#) [765-15-0080A](#)
[765-16-0080B](#) [789.700-44](#) [789.700-54](#) [80-1010](#) [80-9](#) [827381-1](#) [829992-1](#) [902-77-02113](#) [PL00U-301-10D10](#) [PM103MOOLOO](#)
[PM16S1620S32-50](#) [PM212MOOLOO](#) [PM309FOOLOO](#) [PM324FOOLCH](#)