


## SPECIFICATION CONTROL DRAWING

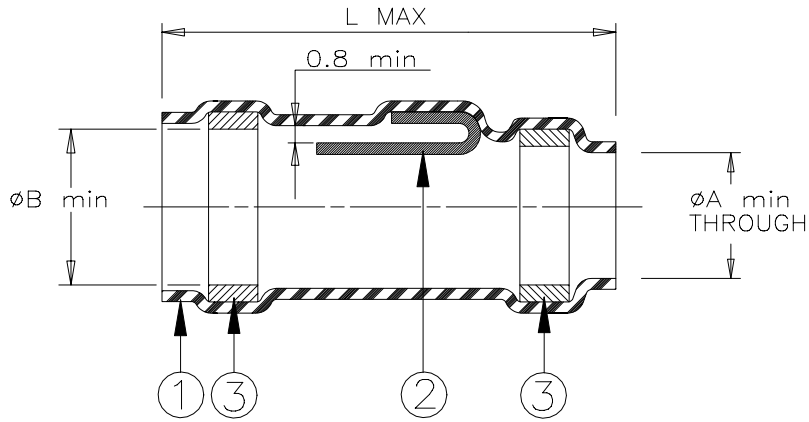

Product Revision		Product Dimensions					Cable Dimensions			
Product Name		L max	øA min	øB min	øE max	øC max	øD min	øF min	H±0.5 (H±0.02)	G±0.5 (G±0.02)
B-013-10	H	17.2 (0.675)	2.6 (0.085)	3.9 (0.155)	2.6 (0.100)	3.9 (0.155)	1.4 (0.055)	1.2 (0.045)	5.5 (0.215)	7.0 (0.275)
B-013-11	E	17.2 (0.675)	4.8 (0.190)	5.9 (0.230)	4.8 (0.190)	5.9 (0.230)	2.5 (0.100)	1.7 (0.065)	5.5 (0.215)	7.0 (0.275)
B-013-12	F	20.8 (0.820)	6.8 (0.270)	8.3 (0.325)	6.8 (0.270)	8.3 (0.325)	4.1 (0.160)	3.0 (0.120)	5.5 (0.215)	7.0 (0.275)
B-013-13	F	24.5 (0.965)	10 (0.395)	11.6 (0.455)	10 (0.395)	11.6 (0.455)	6.5 (0.255)	4.5 (0.175)	8.0 (0.315)	9.5 (0.375)


### MATERIALS

- INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked modified polyvinylidene fluoride.
- SOLDER PREFORM WITH FLUX:  
SOLDER: TYPE Sn96 per ANSI-J-STD-006.  
FLUX: TYPE ROM1 per ANSI-J-STD-004.
- MELTABLE SEALING RINGS: Thermally stabilized thermoplastic. Color: blue.

### APPLICATION

- These controlled soldering devices are designed for termination of a nickel plated copper shield on cables having an insulation rated for at least +150°C.
- Temperature range: -55°C to +175°C with excursion to 200°C.
- When installed per Raychem Process Standard, RCPS-100-70 or Aerospatiale Process Standard, IPDA 83-16, assemblies will meet those requirements of Raychem Specifications RT-1404.

For best results, prepare the cable as shown:

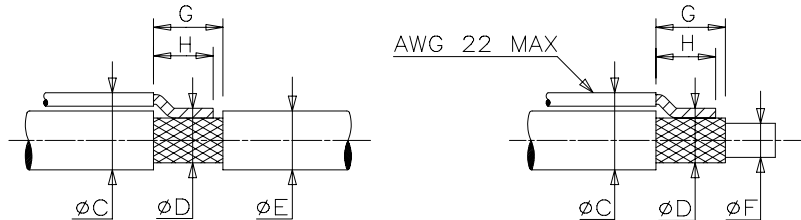

<b>Raychem Interconnect</b> <small>a division of tyco ELECTRONICS</small> 300 Constitution Drive Menlo Park, CA 94025, USA		THERMOFIT DEVICES		TITLE: <b>SOLDERSLEEVE DEVICE                  WITH LOCALIZED SOLDER                  HIGH TEMPERATURE</b>			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE BETWEEN BRACKETS.				DOCUMENT NO.: B-013-1X			
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A  ROUGHNESS IN MICRON	Raychem reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		DCR NUMBER: D000155	REPLACES: D980890		
DRAWN BY: M. FORONDA	DATE: 19-April-00	PROD. REV.: SEE TABLE	DOC. ISSUE: 17	SCALE: None	SIZE: A	SHEET: 1 of 1	

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Solder Sleeves & Shield Tubing](#) category:*

*Click to view products by [TE Connectivity](#) manufacturer:*

Other Similar products are found below :

[D-260-C-A](#) [899170-000](#) [620040N001](#) [620069N003](#) [620263N004](#) [CTA-0050-01](#) [629624-000](#) [6501390002](#) [CX0781-000](#) [CX0782-000](#)  
[696396-000](#) [697080-000](#) [715325N001](#) [FLX40-030-02-CS8652](#) [908357N001](#) [D-436-38CS2908](#) [CB0213-000](#) [CB0219-000](#) [274384-000](#)  
[285343-000](#) [970053-000](#) [ST18-2-00](#) [FLX40-020-04-CS8651](#) [317035-000](#) [325534-000](#) [D-100-00-WOTI](#) [D-150-1011](#) [395947-000](#)  
[427243N001](#) [514535-000](#) [C03534-000](#) [CB0220-000](#) [D44133N001](#) [626168-000](#) [451893-000](#) [931289-000](#) [162583-000](#) [585769N001](#)  
[610001N004](#) [6200060004](#) [622041N003](#) [626167-000](#) [EG3678-000](#) [650075N002](#) [6500820003](#) [6500850004](#) [650126N010](#) [650127N005](#)  
[146201-000](#) [7400720001](#)