


CUSTOMER DRAWING

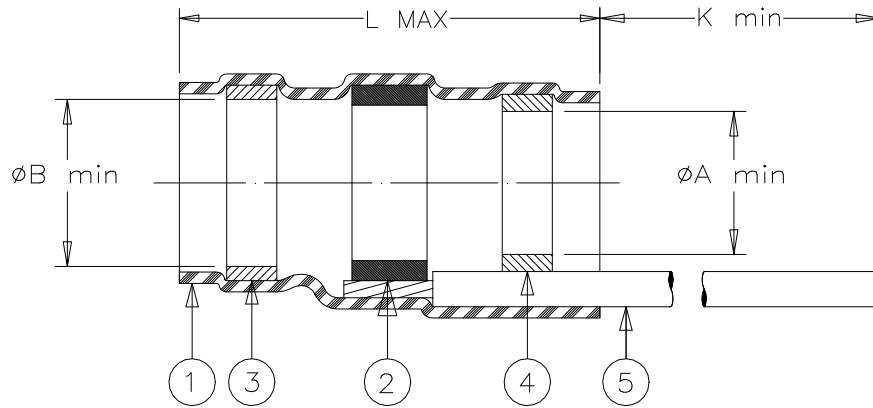

Part Names	Product Dimensions				Cable Dimensions			
	L max	A min	B min	K min	D max	E min	F min	J±1 (J±0.04)
B-058-00	16.5 (0.650)	2.6 (0.100)	3.1 (0.120)	150 (5.900)	2.6 (0.100)	1.6 (0.630)	1.5 (0.060)	7 (0.275)
B-058-01	16.5 (0.650)	4.4 (0.175)	4.9 (0.195)	150 (5.900)	4.4 (0.175)	2.2 (0.085)	2.1 (0.080)	7 (0.275)
B-058-02	22.1 (0.870)	6.9 (0.270)	7.4 (0.290)	150 (5.900)	6.9 (0.270)	3.4 (0.135)	3.2 (0.125)	7 (0.275)


MATERIAL

- INSULATION SLEEVE: Heat-shrinkable, radiation cross-linked modified polyvinylidene fluoride. Transparent blue.
- SOLDER PREFORM WITH FLUX:
SOLDER: TYPE Sn63 per ANSI J-STD-006.
FLUX: TYPE ROL0 per ANSI J-STD-004.
- & 4. MELTABLE RINGS: Thermally stabilized thermoplastic. Color: clear.
- GROUND LEAD: RAYCHEM 55A0111-24 in accordance with MIL-W-22759/32 24 AWG. Stranded tin plated copper. Color: blue.

APPLICATION

- These parts are designed to provide an environment protected shield termination on cables rated for 125°C minimum, meeting the dimensional criteria listed and having tin or silver-plated shields.
- Temperature range: -55°C to +150°C.
- Install using TE Connectivity approved convection or infrared heating tools in accordance with Raychem installation procedure RPIP-709-00.

For best results, prepare the cable as shown:

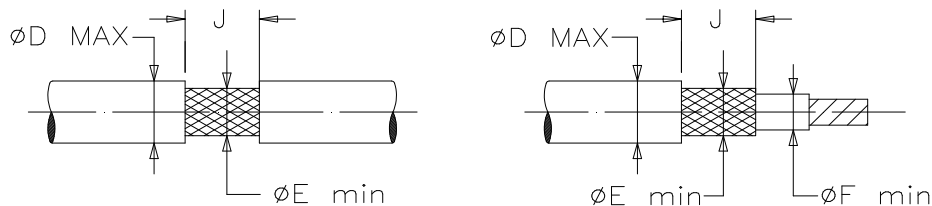

TE TE Connectivity		Raychem Devices	TITLE: SOLDERSLEEVE DEVICE WITH PRE-INSTALLED LEAD			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE IN BETWEEN BRACKETS.			DOCUMENT NO.: B-058-0X			
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	TE Connectivity reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.	DOCUMENT REVISION: E	REVISION ISSUE DATE: 12-MAR-2020		
DRAWN BY: R. MAPALO	DATE: 16-OCT-1998	CAGE CODE: 06090	ECO NUMBER: ECO-20-003669	SCALE: NONE	SIZE: A	SHEET: 1 of 1

© 1998 - 2020 TE Connectivity Corporation. All Rights Reserved.

TE Connectivity, TE Connectivity (logo), Raychem and SolderSleeve are trademarks.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Solder & Shield Tubing category](#):

Click to view products by [TE Connectivity manufacturer](#):

Other Similar products are found below :

[CTA-0027](#) [CTC-0062-20-9/5-9](#) [CTC-0062-22-9/5-9](#) [650076N001](#) [680441-000](#) [D-150-0331CS2902](#) [D-181-1222-90/9CS2800](#) [D-300-01CS1108](#) [982127-1](#) [D-436-0127CS391](#) [D-436-0182CS246](#) [D-436-37CS2651](#) [D-436-58CS246](#) [D-436-61CS246](#) [D-436-82-CS2621](#) [D-659-0087](#) [D-750-0005CS2493](#) [E53797N001](#) [S200-2-01](#) [S200-4-00CS2904](#) [LSS-81-16AA-CS5575](#) [SO63-2-9036-22CS2677](#) [SO63-3-01CS293](#) [SO63-3-9036-20CS2677](#) [SO63-3-9036-22CS2677](#) [SO63-4-9036-20CS2677](#) [SO63-5-9036-22CS2677](#) [CC1525-000](#) [CTA-0025](#) [CTA-0025CS072](#) [D-108-01CS227](#) [D-108-07CS436](#) [D-128-0010](#) [D-141-0108CS404](#) [D-142-51-202-7754](#) [D-144-41CS1371](#) [D-150-0231-NRCS2896](#) [B-801-18-01](#) [B-801-58](#) [515-9](#) [C67137-000](#) [D-436-36CS2908](#) [D-436-37CS2908](#) [D-436-52CS246](#) [D-436-83CS2705](#) [D-438-0102](#) [LSS-26-8A](#) [427243-000](#) [D-106-2012](#) [D-300-08CS1108](#)