
R10S-E1Y1-J1.0K V ACTIVE

Potter & Brumfield | Potter & Brumfield R10

TE Internal #: 7-1393769-0 Potter & Brumfield R10, Power Relays, Industrial Panel Plug-In, Monostable, DC, 0 – 100mW Coil Power Rating Class, 10mW Coil Power Rating DC

View on TE.com >

Relays, Contactors & Switches > Relays > Power Relays



Power Relay Type: Industrial Panel Plug-In

Coil Magnetic System: Monostable, DC

Coil Power Rating Class: 0 – 100 mW

Coil Power Rating DC: 10 mW

Coil Resistance: 1000 Ω

Features

Product Type Features

Power Relay Type

E

Industrial Panel Plug-In

Electrical Characteristics

Insulation Initial Dielectric Between Coil & Contact Class

500 - 1000 V

	00/10/2021 00 2
Contact Features	
Product Weight	40 g[1.41 oz]
Body Features	
Contact Voltage Rating	120 VAC
Contact Switching Load (Min)	100mA @ 12V
Coil Special Features	Sensitive Version
Coil Resistance	1000 Ω
Coil Power Rating DC	10 mW
Coil Power Rating Class	0 – 100 mW
Coil Magnetic System	Monostable, DC
Insulation Initial Resistance	10000 MΩ
Insulation Initial Dielectric Between Adjacent Contacts	1000 Vrms
Insulation Initial Dielectric Between Open Contacts	500 Vrms
Actuating System	DC
Insulation Initial Dielectric Between Contacts & Coil	1000 Vrms

Potter & Brumfield R10, Power Relays, Industrial Panel Plug-In, Monostable, DC, 0 – 100mW Coil Power Rating Class, 10mW Coil Power Rating DC



Contact Arrangement	1 Form C (CO)
Contact Current Class	2–5A, 16A
Contact Current Rating (Max)	3 A
Contact Material	Ag
Contact Number of Poles	1
Terminal Type	Plug-In, Solder
Mechanical Attachment	
Relay Mounting Type	Socket
Dimensions	
Length Class (Mechanical)	20 – 25 mm
Height Class (Mechanical)	30 – 40 mm
Width Class (Mechanical)	16 – 20 mm
Product Width	18.7 mm[.736 in]
Product Length	24.1 mm[.949 in]
Product Height	30.2 mm[1.189 in]
Usage Conditions	
Environmental Ambient Temperature Class	70 – 85 °C
Environmental Ambient Temperature (Max)	75 °C[167 °F]
Operating Temperature Range	-55 – 75 °C
Packaging Features	
Packaging Method	Package
Product Compliance For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2021 (211) Candidate List Declared Against: JAN 202 (211) SVHC > Threshold: Pb (3.7% in Component part) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after

Potter & Brumfield R10, Power Relays, Industrial Panel Plug-In, Monostable, DC, 0 – 100mW Coil Power Rating Class, 10mW Coil Power Rating DC



Halogen Content

Solder Process Capability

Not Yet Reviewed for halogen content

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts




TE Part # 8-1393769-1 R10S-E2Y1-J1.0K=R10

Also in the Series | Potter & Brumfield R10



Customers Also Bought

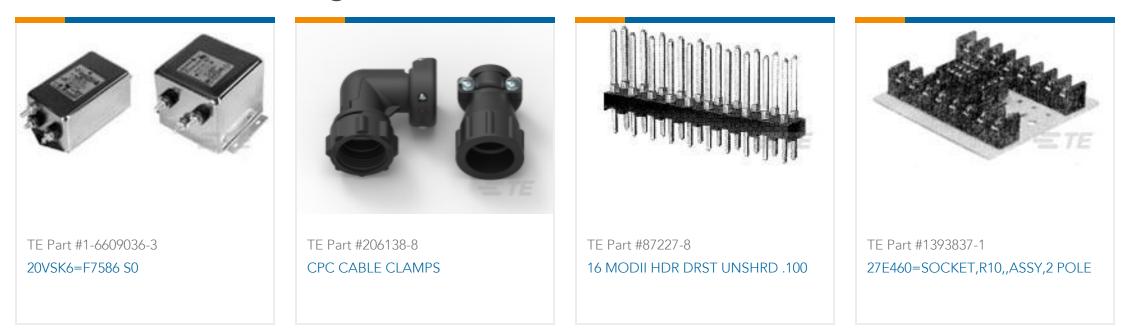

Potter & Brumfield R10, Power Relays, Industrial Panel Plug-In, Monostable, DC, 0 – 100mW Coil Power Rating Class, 10mW Coil Power Rating DC







Documents

CAD Files

3D PDF

3D

Customer View Model ENG_CVM_CVM_7-1393769-0_99.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_7-1393769-0_99.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_7-1393769-0_99.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages R10 General Purpose Dry Circuit to 7.5 Amp Multicontact AC or DC Relay

English

Industrial Relays Quick Reference Guide

English

Industrial Relays Quick Reference Guide

Japanese

Industrial Relays Quick Reference Guide

Product Specifications Definitions, Handling, Processing, Testing and Use of Relays English

Potter & Brumfield R10, Power Relays, Industrial Panel Plug-In, Monostable, DC, 0 – 100mW Coil Power Rating Class, 10mW Coil Power Rating DC



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for General Purpose Relays category:

Click to view products by TE Connectivity manufacturer:

Other Similar products are found below :

PCN-105D3MH,000 59641F200 5JO-1000CD-SIL LY1SAC110120 5X827E 5X837F 5X840F 5X842F 5X848E LY2N-AC120 LY2S-AC220/240 LY2-US-AC120 LY3-US-AC120 LY4F-UA-DC12 LY4F-UA-DC24 LY4F-US-AC120 LY4F-US-AC240 LY4F-US-DC24 LY4F-VD-AC110 LYQ20DC12 M115C60 M115N010 M115N0150 6031007G 603-12D 61211T0B4 61212T400 61222Q400 61243B600 61243C500 61243Q400 61311BOA2 61311BOA6 61311BOA8 61311C0A2 61311COA1 61311COA6 61311F0A2 61311QOA1 61311QOA4 61311T0D6 61311TOA6 61311TOA7 61311TOB3 61311TOB4 61311U0A6 61312Q600 61312T400 61312T600 61313U200