

Axicom | Axicom Cradle Relay N

TE Internal #: 7-1393806-1 Axicom Cradle Relay N, Signal Relays, 125VAC Contact Voltage Rating, 150VDC Contact Voltage Rating, 450mW Signal Relay Coil Power Rating (DC)

View on TE.com >

Relays, Contactors & Switches > Relays > Signal Relays > Signal Relays: 5 amp, Monostable DC



Contact Voltage Rating: 150 VDC Signal Relay Coil Power Rating (DC): 450 mW Signal Relay Mounting Type: Printed Circuit Board

Signal Relay Terminal Type: Plug-In, Solder

All Signal Relays: 5 amp, Monostable DC (138)

Features

Product Type Features

Relay Type

Relay Style

Cradle N Relay V23154/V23162

Cradle N Relay



Product Type	Relay
Electrical Characteristics	
Coil Power Rating Class	600 – 800 mW
Actuating System	AC/DC
Input Voltage	150 VDC
Insulation Initial Dielectric Between Open Contacts	500 Vrms
Contact Limiting Short-Time Current	2 A
Insulation Initial Dielectric Between Contacts and Coil	1000 Vrms
Insulation Initial Dielectric Between Coil/Contact Class	500 – 1000 V
Insulation Initial Dielectric Between Adjacent Contacts	500 Vrms
Power Consumption	800 mW
Contact Limiting Making Current	2 A
Coil Resistance	325 Ω
Contact Limiting Continuous Current	2 A
Coil Type	Monostable
Contact Limiting Breaking Current	2 A

L For support call+1 800 522 6752

Axicom Cradle Relay N, Signal Relays, 125VAC Contact Voltage Rating, 150VDC Contact Voltage Rating, 450mW Signal Relay Coil Power Rating (DC)



Contact Voltage Rating	150 VDC
Signal Relay Coil Power Rating (DC)	450 mW
Signal Relay Contact Switching Voltage (Max)	150 VDC
Signal Relay Coil Magnetic System	Monostable, DC
Body Features	
Weight	20 g[.706 oz]
Contact Features	
Contact Plating Material	Gold
Contact Current Class	0-2A
Contact Special Features	Single Contact
Signal Relay Terminal Type	Plug-In, Solder
Signal Relay Contact Current Rating	2 A
Signal Relay Contact Arrangement	4 Form C (CO)
Contact Material	Nickel
Contact Number of Poles	2
Termination Features	

Termination Type

Plug-In/Solder

Mechanical Attachment

Signal Relay Mounting Type	Printed Circuit Board
Dimensions	
Width Class (Mechanical)	16 – 20 mm
Width	19 mm[.748 in]
Height	30 mm[1.181 in]
Length Class (Mechanical)	20 – 25 mm
Height Class (Mechanical)	25 – 30 mm
Length	24 mm[.945 in]
Dimensions (L x W x H) (Approximate)	19 x 24 x 30 mm[.748 x .945 x 1.181 in]
Usage Conditions	
Environmental Ambient Temperature (Max)	70 °C[158 °F]
Environmental Ambient Temperature Class	50 – 70°C
Environmental Category of Protection	RTI
Operating Temperature Range	-40 – 70 °C

Axicom Cradle Relay N, Signal Relays, 125VAC Contact Voltage Rating, 150VDC Contact Voltage Rating, 450mW Signal Relay Coil Power Rating (DC)



Operation/Application

Performance Type

Packaging Features

Packaging Method

Box & Carton

Standard

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUN 2020 (209) Candidate List Declared Against: JAN 2019 (197) SVHC > Threshold: Not Yet Reviewed
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

Axicom Cradle Relay N, Signal Relays, 125VAC Contact Voltage Rating, 150VDC Contact Voltage Rating, 450mW Signal Relay Coil Power Rating (DC)






Also in the Series | Axicom Cradle Relay N



Customers Also Bought

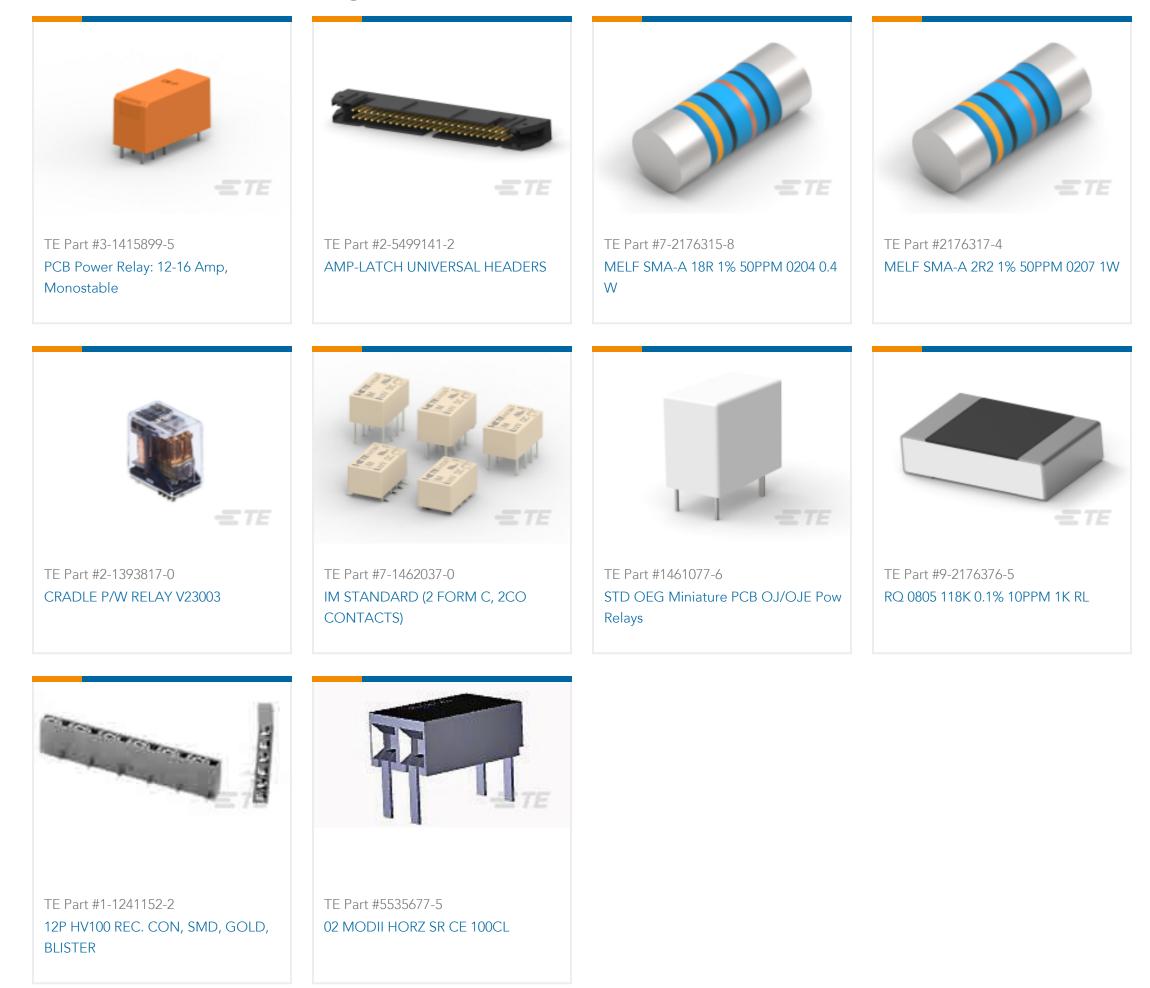

Axicom Cradle Relay N, Signal Relays, 125VAC Contact Voltage Rating, 150VDC Contact Voltage Rating, 450mW Signal Relay Coil Power Rating (DC)



Documents

CAD Files 3D PDF

3D

Customer View Model

ENG_CVM_CVM_7-1393806-1_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_7-1393806-1_A.3d_igs.zip

English

Customer View Model ENG_CVM_CVM_7-1393806-1_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages Industrial Relays Quick Reference Guide

English

Industrial Relays Quick Reference Guide

Japanese

Industrial Relays Quick Reference Guide

Product Specifications Product Specification

·

English

Definitions Relays

English

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Low Signal Relays - PCB category:

Click to view products by TE Connectivity manufacturer:

Other Similar products are found below :

6-1393813-4 6-1462039-0 6-1617529-6 617-12 M39016/11-048P 67RPCX-3 7-1393809-0 7-1393813-3 7556072001 80.010.4522.1 FTR-B4GA006Z FW1210S02 9-1393813-6 9-1617519-3 9-1617582-5 G6AK-2-H-DC5 A-1.5W-K DF2E-L2-DC3V DS1EM24J DS1ES5J DS4E-M-DC5V-H48 EC2-4.5TNJ EC2-9NJ B07B939BC1-0868 1608043-4 1617076-5 1617117-3 1617137-2 1617518-5 1617560 HMB1130K00 HMB1131S06 HMS1119S01 HMS1131S10 HMS1201S03 HMS1201S87 HMS1205S02 2-1393807-6 2-1617071-2 2-1617594-1 JMGSC-5LW K6-PS KHS-17D11-110 9-1393761-0 9-1617352-3 9-1617583-1 276XAXH-9D 1617072-3 1617075-4 1617109-2