

# SPECIFICATION CONTROL DRAWING


**55PC1141**

TITLE  
FOUR CONDUCTOR CABLE, SHIELDED, JACKETED, GENERAL PURPOSE, 600 VOLT

Date  
2-21-08

Revision  
B

This specification sheet forms a part of the latest issue of Raychem Specification 55PC.

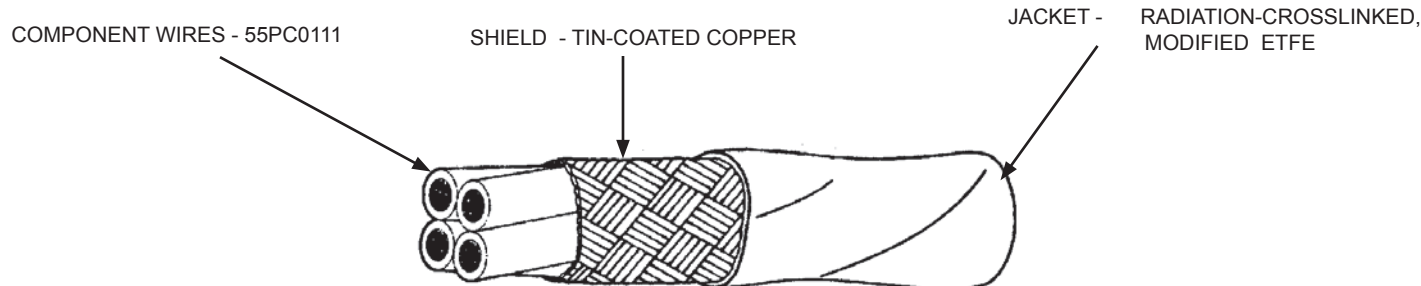

| CONSTRUCTION DETAILS     |                         |                      |                             |             |                             |              |                  |                            |                  |
|--------------------------|-------------------------|----------------------|-----------------------------|-------------|-----------------------------|--------------|------------------|----------------------------|------------------|
| PART NUMBER<br><i>1/</i> | CONDUCTOR SIZE<br>(AWG) | SHIELD SIZE<br>(AWG) | JACKET THICKNESS<br>( in. ) |             | OUTSIDE DIAMETER<br>( in. ) |              |                  | WEIGHT<br>( lbs/1000 ft. ) |                  |
|                          |                         |                      | LOWER SPEC LIMIT            | TARGET WALL | LOWER SPEC LIMIT            | TARGET VALUE | UPPER SPEC LIMIT | TARGET VALUE               | UPPER SPEC LIMIT |
| 55PC1141-26-*            | 26                      | 38                   | .0060                       | .0075       | .098                        | .111         | .124             | 10.86                      | 11.38            |
| 55PC1141-24-*            | 24                      | 38                   | .0060                       | .0080       | .111                        | .125         | .138             | 14.03                      | 14.59            |
| 55PC1141-22-*            | 22                      | 38                   | .0060                       | .0080       | .123                        | .140         | .156             | 18.57                      | 19.19            |
| 55PC1141-20-*            | 20                      | 38                   | .0060                       | .0080       | .142                        | .161         | .180             | 25.67                      | 26.42            |
| 55PC1141-18-*            | 18                      | 38                   | .0065                       | .0085       | .163                        | .186         | .209             | 36.10                      | 37.15            |
| 55PC1141-16-*            | 16                      | 38                   | .0065                       | .0085       | .181                        | .205         | .230             | 44.44                      | 45.52            |
| 55PC1141-14-*            | 14                      | 38                   | .0070                       | .0090       | .213                        | .243         | .273             | 64.85                      | 66.35            |
| 55PC1141-12-*            | 12                      | 38                   | .0075                       | .0095       | .252                        | .296         | .339             | 98.21                      | 105.09           |
| 55PC1141-10-*            | 10                      | 36                   | .0080                       | .0100       | .285                        | .346         | .407             | 152.70                     | 157.77           |

Users should evaluate the suitability of this product for their application. Specifications are subject to change without notice.  
Tyco Electronics also reserves the right to make changes in materials or processing, which do not affect compliance with any specification, without notification to Buyer.

*1/* COLORS AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681. HOWEVER, DUE TO LENGTH LIMITATIONS OF THE RAYCHEM PART NUMBER, AN ALTERNATIVE COLOR CODE MAY REPLACE MIL-STD-681 COLOR CODE DESIGNATORS. (EXAMPLE: "901/902..." MAY BE REPLACED BY "Axxx".) OTHER CODES AND SUFFIXES MAY BE ADDED TO THE PART NUMBER, AS NECESSARY, TO CAPTURE ANY ADDITIONAL REQUIREMENTS IMPOSED BY THE PURCHASE ORDER.

The TE logo, Tyco Electronics and Raychem are trademarks.

DIMENSIONS ARE IN INCHES, AND UNLESS OTHERWISE DESIGNATED ARE NOMINAL.

THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.  
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.



Raychem Wire & Cable  
501 Oakside Avenue  
Redwood City, CA 94063-3800  
Phone: 1-800-227-8816  
Fax: 1-650-361-6297

## CABLE RATINGS AND ADDITIONAL REQUIREMENTS

### TEMPERATURE RATING: 150°C

Maximum continuous conductor temperature

VOLTAGE RATING: 600 volts (rms) at sea level

CROSSLINK VERIFICATION: 300 ± 3°C for 1 hour

DIELECTRIC WITHSTAND: 1500 volts (rms), 60 Hz

JACKET COLOR: White preferred

### JACKET ELONGATION AND TENSILE STRENGTH:

Elongation, 50% (minimum)

Tensile Strength, 5000 lbf/in<sup>2</sup> (minimum)

### JACKET FLAWS:

Spark Test, 1000 volts (rms)

Impulse Dielectric Test, 6.0 kV (peak)

SHIELD COVERAGE: 85% (minimum)

VOLTAGE WITHSTAND TEST (Post Environmental):

1000 volts (rms), 60 Hz, 1 minute

### PART NUMBER:

The "\*\*\*" in the part numbers on page 1 shall be replaced by color code designators with a slash separating the component wire colors and a dash separating the component wire colors from the jacket color. Colors shown do not necessarily reflect the sequence of manufacturing.

1/ Example: AWG 22, red, yellow, green and blue component wires; white jacket:  
55PC1141-22-2/4/5/6-9

1/ See footer section on page 1

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Multi-Conductor Cables](#) category:*

*Click to view products by [TE Connectivity](#) manufacturer:*

Other Similar products are found below :

[89182-010-1000](#) [89705-008-500](#) [6000FE-877-1000](#) [CS2885-000](#) [M27500-20SP2S23](#) [6300FE-877-U1000](#) [6309UE-877-1000](#) [M3905-BK005](#)  
[6502FE 8771000](#) [6541PA-008-U1000](#) [CV6807-000](#) [CW9530-000](#) [CX6543-000](#) [CXA-0066-20-4-9CS2973](#) [CXA-0078-16-1-9CS2405](#) [CXA-](#)  
[0078-22-4-9CS2405](#) [CXA-0078-24-4-9CS2405](#) [CXA-0140-16-6/9-9CS2405](#) [CY0660-000](#) [720451-000](#) [752687-000](#) [768146-000](#) [773159-000](#)  
[82841-877-5000](#) [83318E-009-500](#) [8348-060-500](#) [83559-002-1000](#) [83653-002-5000](#) [83659-002-1000](#) [83709-002-1000](#) [8404-060-500](#) [8469](#)  
[060100](#) [858171-000](#) [8628-060-500](#) [868361-001](#) [8730-060-1000](#) [8737-060-U1000](#) [8747-060-100](#) [8747-060-1000](#) [8769-060-1000](#) [8775-060-](#)  
[500](#) [8780-060-1000](#) [8782-001-U1000](#) [88444-002-1000](#) [9159-060-500](#) [939870-000](#) [9423 060U500](#) [9444 060U1000](#) [9497 0001000](#) [9515-060-](#)  
[1000](#)