

THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN, REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID

Raychem Corporation
300 Constitution Drive, Menlo Park, California 94025
1-800-2-Raychem Fax: 1-415-361-6297



COLORS AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-881

DIMENSIONS ARE IN INCHES, AND UNLESS OTHERWISE DESIGNATED ARE NOMINAL.

NOTE: Nominal values are for information only. Nominal values are not requirements.

TEMPERATURE RATING: 150°C
 Maximum continuous conductor temperature
 VOLTAGE RATING: 600 volts (rms)
 CROSSLINKED VERIFICATION: 300 ± 3°C for 6 hours
 BLOCKING: 150 ± 3°C for 6 hours
 DIELECTRIC WITHSTAND: 1500 volts (rms), 60 Hz
 FLAMMABILITY: Procedure 1, 30 seconds (maximum);
 3 in. (maximum); no flaming of facial tissue
 JACKET COLOR: White preferred
 JACKET CONCENTRICITY: 70% (minimum)
 JACKET ELONGATION AND TENSILE STRENGTH:
 Elongation, 50% (minimum)
 Tensile Strength, 5000 lbf/in² (minimum)


TEMPERATURE RATING: 200 ± 5°C for 168 hours
 LIFE CYCLE: 200 ± 5°C for 168 hours
 LOW TEMPERATURE-COLD BEND: -65 ± 5°C for 4 hours

PART NUMBER:
 The "*" in the part numbers above shall be replaced by
 color code designators with a slash separating the
 component wire colors and a dash separating the
 component wire colors from the jacket color.
 Example: AWG 24, white and black component wires;
 white jacket: CXA-0140-24-9/0-9

CABLE RATINGS AND ADDITIONAL REQUIREMENTS

PART NUMBER	CONDUCTOR SIZE (AWG)	JACKET THICKNESS (in.)		OUTSIDE DIAMETER (in.)		MAXIMUM WEIGHT (lb/1000 ft)
		MINIMUM	NOMINAL	NOMINAL	MAXIMUM	
CXA-0140-24-*	24	.006	.008	.106	.111	6.9
CXA-0140-22-*	22	.006	.008	.120	.126	9.3
CXA-0140-20-*	20	.006	.008	.136	.143	12.9
CXA-0140-18-*	18	.006	.008	.158	.166	18.3
CXA-0140-16-*	16	.006	.008	.174	.183	22.5
CXA-0140-14-*	14	.006	.008	.202	.212	32.1
CXA-0140-12-*	12	.007	.009	.246	.258	48.2
CXA-0140-10-*	10	.007	.009	.296	.311	73.6

CABLE CONSTRUCTION DETAILS

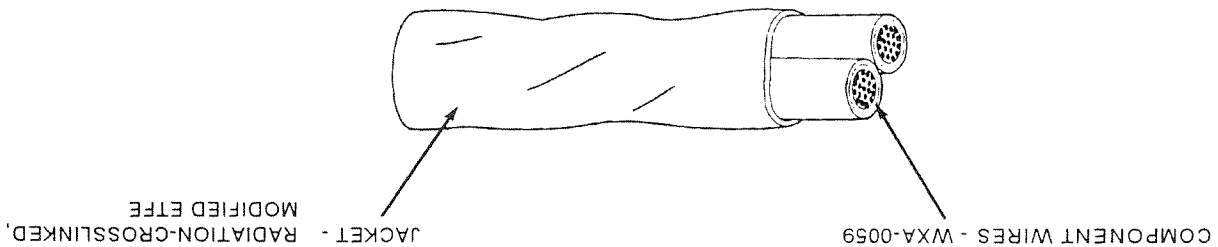

This specification sheet forms a part of the latest issue of Raychem Specification 55A and MIL-C-27500 as applicable.

TITLE	TWO CONDUCTOR CABLE, JACKETED, LIGHTWEIGHT, GENERAL PURPOSE, 600 VOLT	
	Date	8-23-96
Revision	A	
	CXA-0140	

SPECIFICATION CONTROL DRAWING

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Multi-Conductor Cables](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[89182-010-1000](#) [89705-008-500](#) [6000FE-877-1000](#) [CS2885-000](#) [M27500-20SP2S23](#) [6300FE-877-U1000](#) [6309UE-877-1000](#) [M3905-BK005](#)
[6502FE 8771000](#) [6541PA-008-U1000](#) [CV6807-000](#) [CW9530-000](#) [CX6543-000](#) [CXA-0066-20-4-9CS2973](#) [CXA-0078-16-1-9CS2405](#) [CXA-](#)
[0078-22-4-9CS2405](#) [CXA-0078-24-4-9CS2405](#) [CXA-0140-16-6/9-9CS2405](#) [CY0660-000](#) [720451-000](#) [752687-000](#) [768146-000](#) [773159-000](#)
[82841-877-5000](#) [83318E-009-500](#) [8348-060-500](#) [83559-002-1000](#) [83653-002-5000](#) [83659-002-1000](#) [83709-002-1000](#) [8404-060-500](#) [8469](#)
[060100](#) [858171-000](#) [8628-060-500](#) [868361-001](#) [8730-060-1000](#) [8737-060-U1000](#) [8747-060-100](#) [8747-060-1000](#) [8769-060-1000](#) [8775-060-](#)
[500](#) [8780-060-1000](#) [8782-001-U1000](#) [88444-002-1000](#) [9159-060-500](#) [939870-000](#) [9423 060U500](#) [9444 060U1000](#) [9497 0001000](#) [9515-060-](#)
[1000](#)