


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
D2		ADD DASH NUMBER	27JUN2017	P.Z R.S

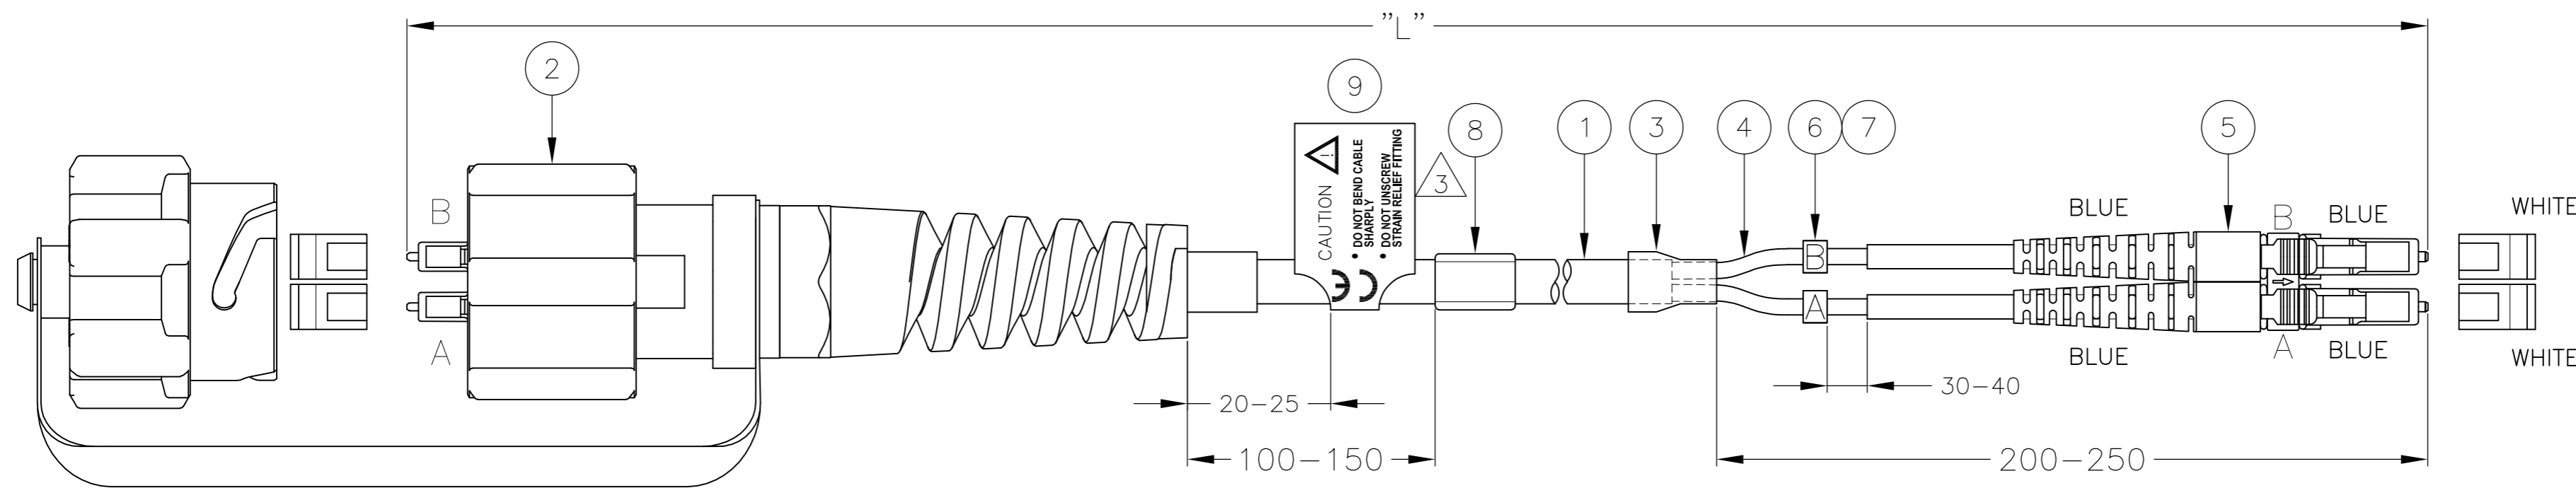

FIBER CONNECTIVITY	
ODVA	LC/DPX
A	A
B	B

PART NUMBER	"L" (METER)		MAXIMUM $\Delta$ ATTENUATION (dB)
	MIN	MAX	
2061348-2	1.85	2.15	0.30
2061348-5	4.85	5.15	0.30
1-2061348-0	9.85	10.15	0.30
1-2061348-5	14.80	15.20	0.31
2-2061348-0	19.80	20.20	0.31
3-2061348-0	29.50	30.50	0.31
3-2061348-5	34.50	35.50	0.32
4-2061348-5	44.50	45.50	0.33
5-2061348-0	49.50	50.50	0.33
6-2061348-0	59.00	61.00	0.34
7-2061348-0	69.00	71.00	0.34
7-2061348-5	74.00	76.00	0.34
8-2061348-0	79.00	81.00	0.35
8-2061348-5	84.00	86.00	0.35
9-2061348-0	89.00	91.00	0.35
9-2061348-9	99.00	101.00	0.35
8-2061348-1	118.8	121.2	0.36
8-2061348-3	178.0	182.0	0.40
8-2061348-4	247.0	253.0	0.44
8-2061348-2	297.0	303.0	0.45

- NOTES:
- 1 MAXIMUM CONNECTOR ATTENUATION IS 0.3 dB PLUS CABLE ATTENUATION OF 0.5 dB/km AT 1310 nm (SEE TABLE)
  - 2 FILLED OUT TEST RESULT SHEET SUPPLIED WITH EACH INDIVIDUALLY PACKED ASSEMBLY
  - 3 INFORMATION ON LABEL SEE DETAIL:
    - BARCODE
    - UNIQUE SERIAL NUMBER
    - ASSEMBLY LENGTH
    - TE CONNECTIVITY PART NUMBER
    - TE CONNECTIVITY ORDER NUMBER
  - 4 CABLE INFORMATION:
    - FIBER CORE DIAMETER: 9/125  $\mu$ m
    - OUTER JACKET DIAMETER: 5.5 mm
    - OUTER JACKET COLOUR: BLACK
    - OUTER JACKET MATERIAL: FLAME RETARDANT TPU
  - 5 ENVIRONMENTAL PERFORMANCE -40°C TO +85°C
  - 6 IP67 RATED
  - 7 CABLE, EXTERNAL PLUG COMPONENTS AND CAP ARE UV STABLE



Qty	Description	Item
1	FOAC ODVA WARNING LABEL WITH CE-MARKING	9
1	FOAC INFORMATION LABEL	8
1	LABEL "B"	7
1	LABEL "A"	6
1	LC DUPLEX CONNECTOR ASSEMBLY, SINGLE MODE, BLUE	5
2	FOAC PROTECTIVE TUBING, BLACK	4
1	FOAC HEAT SHRINK TUBING, BLACK	3
1	PLUG SUBASSY, LC ODVA INDUSTRIAL CONNECTOR, WITH CAP	2
L	FOCAB 5.5 mm 2FOLD, SINGLE MODE 9/125, BLACK	1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN R. COOLEN 11DEC2009		
CHK M. JANSEN 26AUG2010		
APVD J. VERHOEVEN 26AUG2010		
PRODUCT SPEC		
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	NAME
1 PLC $\pm$ -	0 PLC $\pm$ -	FIBER OPTIC LEAD 5.5 mm
2 PLC $\pm$ -	1 PLC $\pm$ -	LC/DPX WITH ODVA ADAPTER - LC/DPX
3 PLC $\pm$ -	2 PLC $\pm$ -	SINGLE MODE 9/125
4 PLC $\pm$ -	3 PLC $\pm$ -	SIZE
ANGLES $\pm$ -	4 PLC $\pm$ -	CAGE CODE
MATERIAL	FINISH	DRAWING NO
		00779
		SCALE
		NTS
		SHEET
		1 OF 1
		REV
		D2

WEIGHT 0.000000  
 CUSTOMER DRAWING  
 SCALE NTS SHEET 1 OF 1 REV D2

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Fibre Optic Cable Assemblies](#) category:*

*Click to view products by [TE Connectivity](#) manufacturer:*

Other Similar products are found below :

[7-21002-9](#) [760-1518](#) [FA04390-50-M-72-LC-N](#) [MLB 501 V RED](#) [MLB 501 V YELLOW](#) [1-3636-600-5208](#) [2061529-7](#) [1-6693182-0](#)  
[1754898-1](#) [21055-6](#) [FXBSCSCE2LM002](#) [3000005](#) [3-21053-2](#) [MLB 2001 V RED](#) [MLB 2001 V YELLOW](#) [MLB 501 V BLACK](#) [5492011-6](#)  
[106284-7000](#) [5492011-5](#) [5492011-8](#) [5492011-9](#) [8-21007-5](#) [2123524-2](#) [2123524-1](#) [106386-4447](#) [DFSM-SCSC-2M](#) [2123909-4](#) [2123909-8](#)  
[106273-0629](#) [2125046-1](#) [2821236-3](#) [2821310-2](#) [2821310-3](#) [2821313-4](#) [FX2ERLNLNSNM0.5](#) [CF-980062-074](#) [CF-901200-394](#) [CF-980062-](#)  
[073](#) [CF-980062-071](#) [CF-980062-075](#) [CF-980062-072](#) [17-300310-100](#) [2821236-2](#) [2821313-1](#) [G-FC-FC-S-002.0-DX-A-18-Y](#) [G-E2A-E2A-S-](#)  
[003.0-SX-A-18-Y](#) [956-322-502214](#) [FA04474](#) [1083665](#) [1111540](#)