


CUSTOMER DRAWING

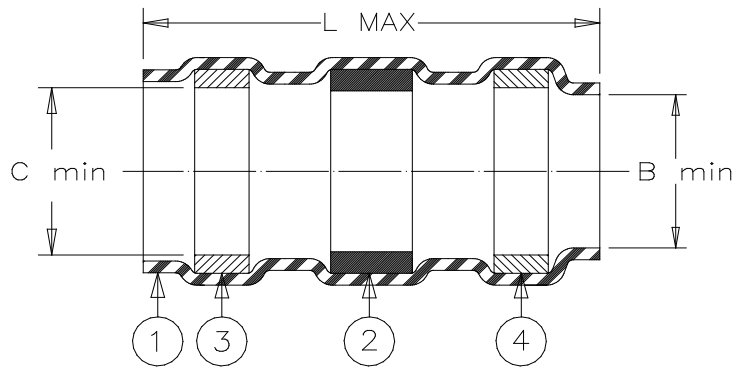

Part Name	Component Dimensions			Cable Dimensions				
	L max	B min	C min	E max	F min	G ±0.5(0.020)	H ±0.5(0.020)	D max
SLT-3X	17.3 (0.681)	2.7 (0.106)	3.1 (0.122)	3.1 (0.122)	1.4 (0.055)	7 (0.276)	6 (0.236)	2.7 (0.106)
SLT-5X	17.3 (0.681)	4.4 (0.173)	5.0 (0.197)	5.0 (0.197)	2.5 (0.098)	7 (0.276)	6 (0.236)	4.4 (0.173)
SLT-6X	20.0 (0.787)	5.9 (0.232)	6.4 (0.252)	6.4 (0.252)	3.2 (0.126)	7 (0.276)	6 (0.236)	5.9 (0.232)
SLT-7X	20.0 (0.787)	7.1 (0.280)	7.6 (0.299)	7.6 (0.299)	4.1 (0.161)	7 (0.276)	6 (0.236)	7.1 (0.280)
SLT-12X	31.5 (1.240)	10.8 (0.425)	11.6 (0.457)	11.6 (0.457)	7.3 (0.287)	9.5 (0.374)	8.5 (0.335)	10.8 (0.425)
SLT-14X	31.2 (1.228)	13.3 (0.524)	13.8 (0.543)	13.3 (0.524)	8.1 (0.319)	7 (0.276)	6 (0.236)	8.9 (0.350)


MATERIAL

- INSULATION SLEEVE: Heat-shrinkable, radiation cross-linked modified polyvinylidene fluoride. Transparent clear.
- SOLDER PREFORM WITH FLUX:
SOLDER: TYPE Cd18 per ANSI J-STD-006.
FLUX: TYPE ROL0 per ANSI J-STD-004. Color: Violet.
- MELTABLE SEALING RING: Thermally stabilized thermoplastic. Color: Blue.
- MELTABLE SEALING RING: Thermally stabilized thermoplastic. Color: Clear.


APPLICATION

- This controlled soldering device is designed for termination of a tin or silver plated copper shield on a cable having an insulation rated for at least +105°C.
- Temperature range: -55°C to +125°C.
- For application tooling contact your local Raychem technical service.

For best results, prepare the cable as shown:

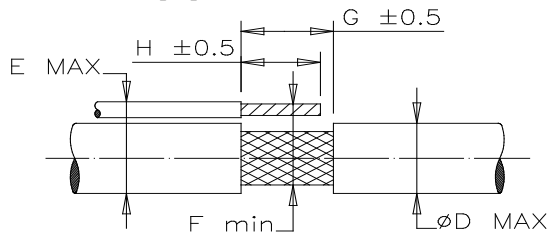

TE Connectivity, TE connectivity (logo), Raychem, and SolderSleeve are trademarks

		Raychem Devices	TITLE: SOLDERSLEEVE DEVICE SHIELD TERMINATION LOW TEMPERATURE			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE IN BETWEEN BRACKETS.			DOCUMENT NO.: SLT-YX/1YX			
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	TE Connectivity reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.	Revision: A2		Issue Date: March 2020	
DRAWN BY: R. MAPALO	DATE: 07-06-98	ECO: ECO-20-003568	SCALE: NONE	SIZE: A	SHEET: 1 of 1	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Solder Sleeves & Shield Tubing](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[899170-000](#) [620040N001](#) [620263N004](#) [CTA-0050-01](#) [629624-000](#) [6500750004](#) [6501390002](#) [696396-000](#) [697080-000](#) [D-150-0331CS2902](#)
[D-300-01CS1108](#) [982127-1](#) [D-436-0182CS246](#) [D-436-37CS2651](#) [D-436-61CS246](#) [D-436-82-CS2621](#) [E53797N001](#) [CB0213-000](#) [S200-4-](#)
[00CS2904](#) [FLX40-020-04-CS8651](#) [CTA-0025](#) [D-108-02CS227](#) [D-108-07CS436](#) [D-128-0010](#) [D-141-0108CS404](#) [D-144-41CS1371](#) [D-146-](#)
[0230](#) [D-150-0231-NRCS2896](#) [D-150-1011CS821](#) [B-801-18-01](#) [515-9](#) [C67137-000](#) [C76473N001](#) [CB0220-000](#) [D-436-0185CS1102](#) [D-436-](#)
[36CS2908](#) [D-436-37CS2908](#) [D-436-52CS246](#) [D44133N001](#) [LSS-26-8A](#) [626168-000](#) [D-106-2012](#) [D-108-00CS227](#) [D-300-08CS1108](#)
[610001N004](#) [622041N003](#) [B-801-36](#) [650075N002](#) [6500850004](#) [650126N010](#)