
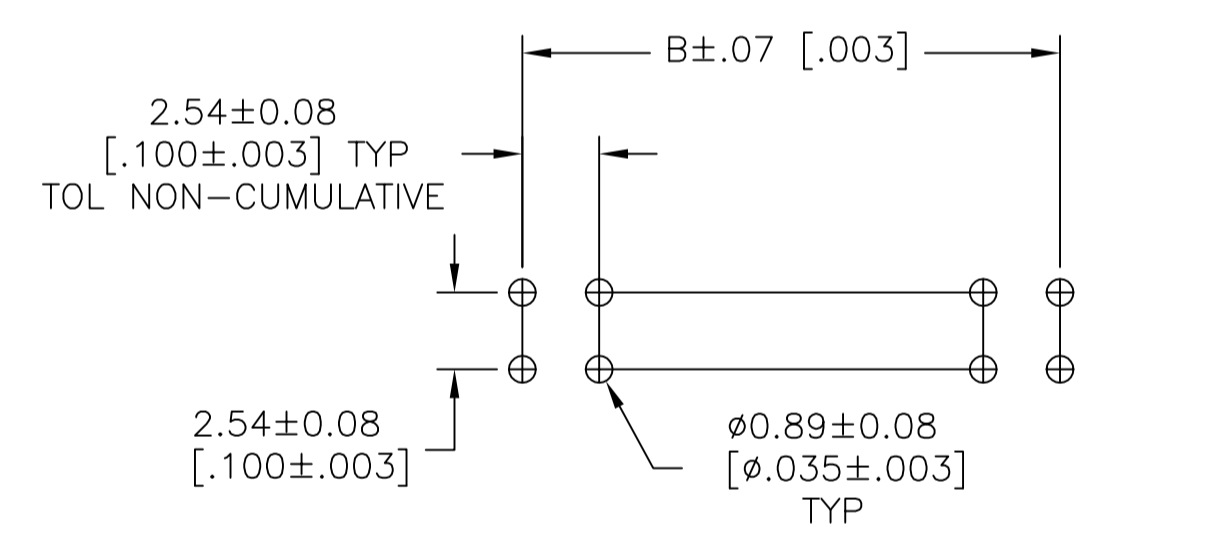
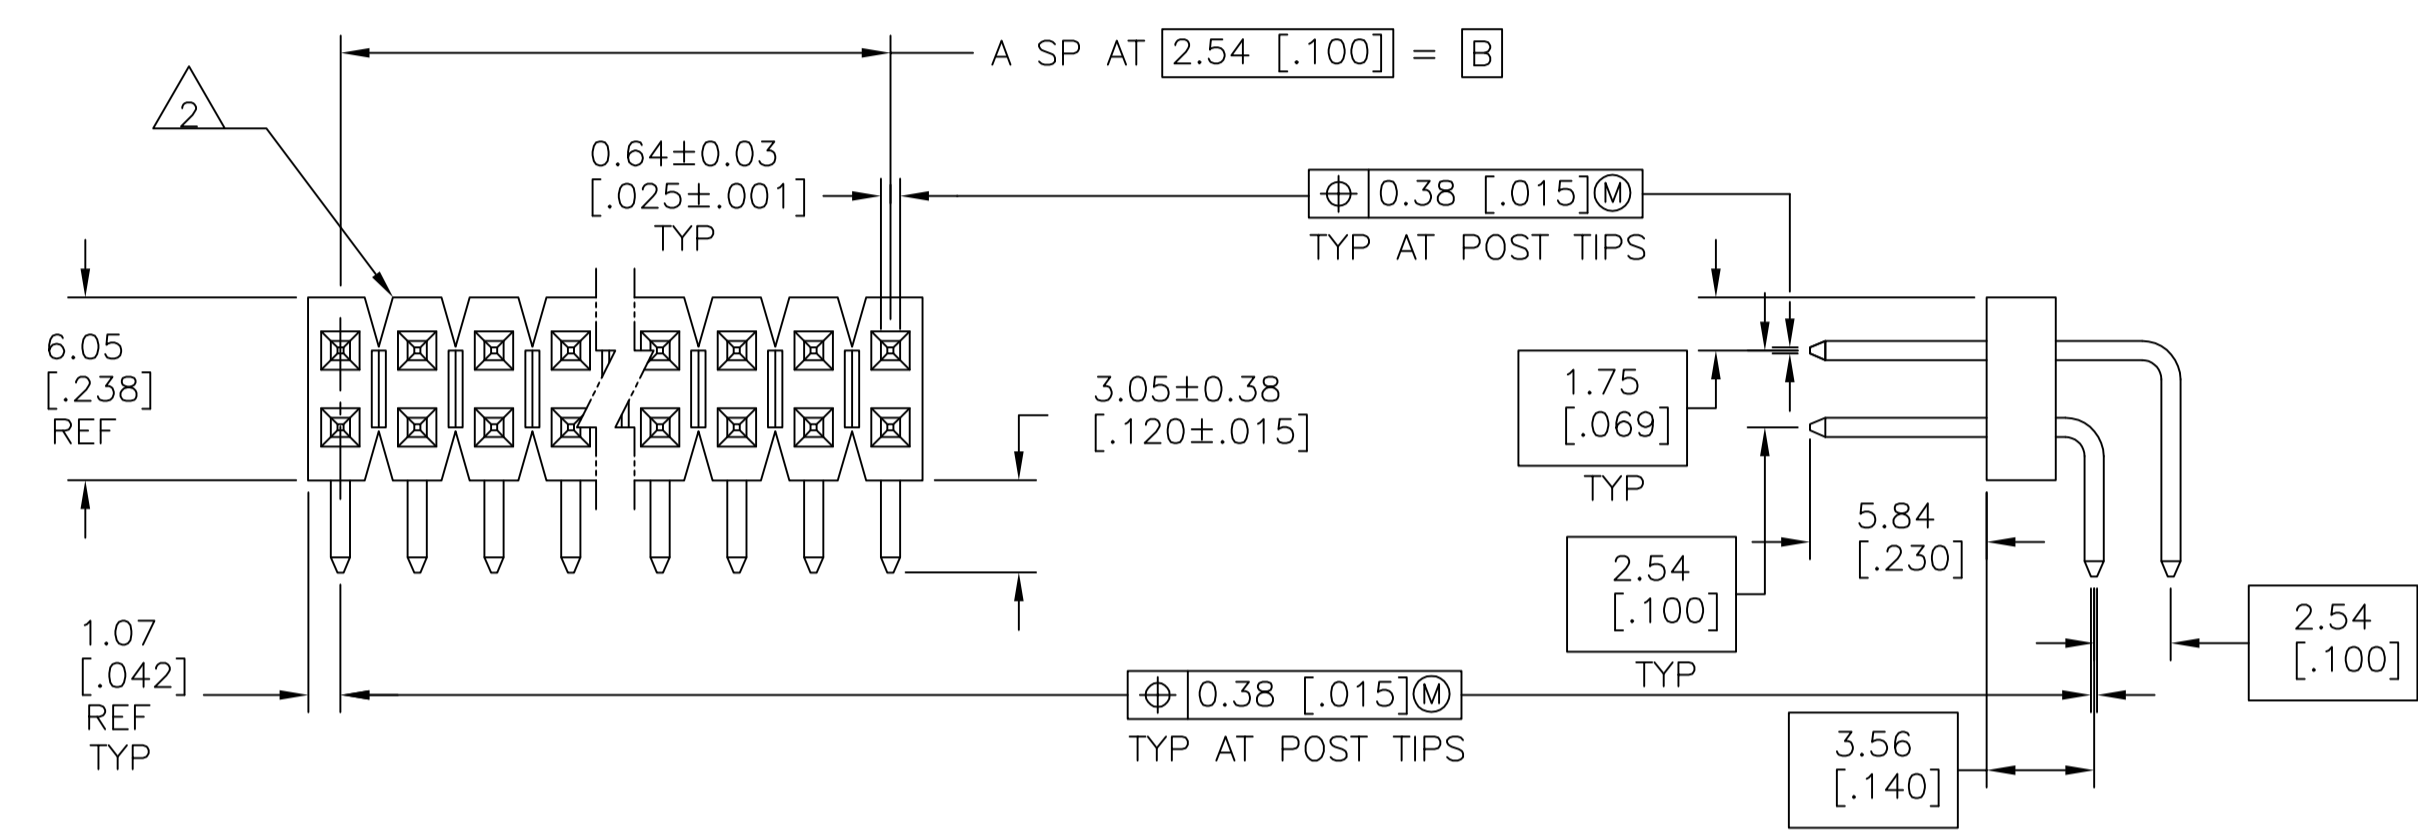


REVISIONS					
P	LTR	DESCRIPTION	DATE	OWN	APPD
M4	REVISED PER	ECO-14-000544	19MAY2014	NK	MM
M5	REVISED PER	ECO-17-010159	13JUL2017	RS	MM

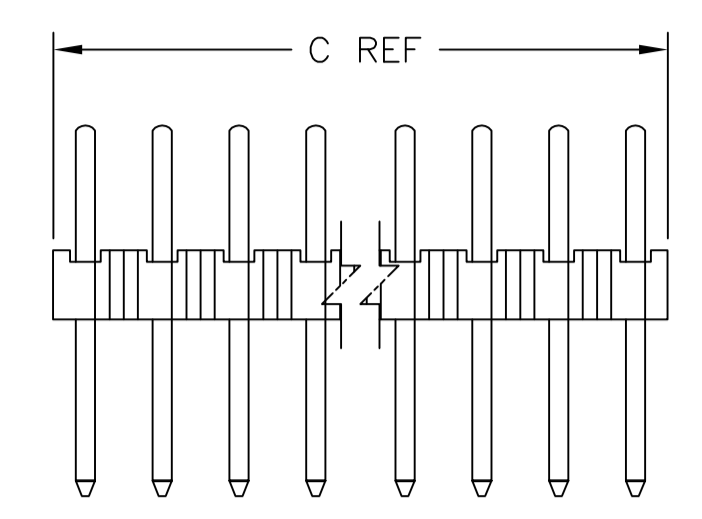

RECOMMENDED HOLE LAYOUT

OBSOLETE	△	△	101.19 [3.984]	99.06 [3.900]	39	80	9-103330-0
OBSOLETE	△	△	98.65 [3.884]	96.52 [3.800]	38	78	8-103330-9
OBSOLETE	△	△	96.11 [3.784]	93.98 [3.700]	37	76	8-103330-8
OBSOLETE	△	△	93.57 [3.684]	91.44 [3.600]	36	74	8-103330-7
OBSOLETE	△	△	91.03 [3.584]	88.9 [3.500]	35	72	8-103330-6
OBSOLETE	△	△	88.49 [3.484]	86.36 [3.400]	34	70	8-103330-5
OBSOLETE	△	△	85.95 [3.384]	83.82 [3.300]	33	68	8-103330-4
OBSOLETE	△	△	83.41 [3.284]	81.28 [3.200]	32	66	8-103330-3
OBSOLETE	△	△	80.87 [3.184]	78.74 [3.100]	31	64	8-103330-2
OBSOLETE	△	△	78.33 [3.084]	76.2 [3.000]	30	62	8-103330-1
OBSOLETE	△	△	75.79 [2.984]	73.66 [2.900]	29	60	8-103330-0
OBSOLETE	△	△	73.25 [2.884]	71.12 [2.800]	28	58	7-103330-9
OBSOLETE	△	△	70.71 [2.784]	68.58 [2.700]	27	56	7-103330-8
OBSOLETE	△	△	68.17 [2.684]	66.04 [2.600]	26	54	7-103330-7
OBSOLETE	△	△	65.63 [2.584]	63.5 [2.500]	25	52	7-103330-6
OBSOLETE	△	△	63.09 [2.484]	60.96 [2.400]	24	50	7-103330-5
OBSOLETE	△	△	60.55 [2.384]	58.42 [2.300]	23	48	7-103330-4
OBSOLETE	△	△	58.01 [2.284]	55.94 [2.200]	22	46	7-103330-3
OBSOLETE	△	△	55.47 [2.184]	53.34 [2.100]	21	44	7-103330-2
OBSOLETE	△	△	52.93 [2.084]	50.8 [2.000]	20	42	7-103330-1
OBSOLETE	△	△	50.39 [1.984]	48.26 [1.900]	19	40	7-103330-0
OBSOLETE	△	△	47.85 [1.884]	45.72 [1.800]	18	38	6-103330-9
OBSOLETE	△	△	45.31 [1.784]	43.18 [1.700]	17	36	6-103330-8
OBSOLETE	△	△	42.77 [1.684]	40.64 [1.600]	16	34	6-103330-7
OBSOLETE	△	△	40.23 [1.584]	38.1 [1.500]	15	32	6-103330-6
OBSOLETE	△	△	37.69 [1.484]	35.56 [1.400]	14	30	6-103330-5
OBSOLETE	△	△	35.15 [1.384]	33.02 [1.300]	13	28	6-103330-4
OBSOLETE	△	△	32.61 [1.284]	30.48 [1.200]	12	26	6-103330-3
OBSOLETE	△	△	30.07 [1.184]	27.94 [1.100]	11	24	6-103330-2
OBSOLETE	△	△	27.53 [1.084]	25.4 [1.000]	10	22	6-103330-1
OBSOLETE	△	△	24.99 [.984]	22.86 [.900]	9	20	6-103330-0
OBSOLETE	△	△	22.45 [.884]	20.32 [.800]	8	18	5-103330-9
OBSOLETE	△	△	19.91 [.784]	17.78 [.700]	7	16	5-103330-8
OBSOLETE	△	△	17.37 [.684]	15.24 [.600]	6	14	5-103330-7
OBSOLETE	△	△	14.83 [.584]	12.7 [.500]	5	12	5-103330-6
OBSOLETE	△	△	12.29 [.484]	10.16 [.400]	4	10	5-103330-5
OBSOLETE	△	△	9.75 [.384]	7.62 [.300]	3	8	5-103330-4
OBSOLETE	△	△	7.21 [.284]	5.08 [.200]	2	6	5-103330-3
OBSOLETE	△	△	4.67 [.184]	2.54 [.100]	1	4	5-103330-2
OBSOLETE	△	△	2.13 [.084]	—	—	2	5-103330-1

REMARKS	PLATING	C	B	A	NO OF POSN	PART NUMBER

- 1 ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS.
- 2 BREAKAWAY NOTCH ANGLE CAN BE ORIENTED TO THE RIGHT (AS SHOWN) OR TO THE LEFT
- 3 0.00254 [.000100] -0.00508 [.000200] MATTE TIN-LEAD OVER 0.00127 [.000050] NICKEL.
- 4 0.00254 [.000100] -0.00508 [.000200] BRIGHT TIN OVER 0.00127 [.000050] NICKEL.
- 5 PRELIMINARY PART - NOT RELEASED FOR PRODUCTION.
- 6 HOUSING MATERIAL: FLAME RETARDANT THERMOPLASTIC; COLOR-BLACK. POSTS: COPPER ALLOY
- 7 0.00254 [.000100] -0.00508 [.000200] MATTE TIN OVER 0.00127 [.000050] NICKEL.
- 8 HIGH TEMPERATURE CONFIGURATION.
- 9 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

△	△	101.19 [3.984]	99.06 [3.900]	39	80	4-103330-1
△	△	101.19 [3.984]	99.06 [3.900]	39	80	4-103330-0
△	△	98.65 [3.884]	96.52 [3.800]	38	78	3-103330-9
△	△	96.11 [3.784]	93.98 [3.700]	37	76	3-103330-8
△	△	93.57 [3.684]	91.44 [3.600]	36	74	3-103330-7
△	△	91.03 [3.584]	88.9 [3.500]	35	72	3-103330-6
△	△	88.49 [3.484]	86.36 [3.400]	34	70	3-103330-5
△	△	85.95 [3.384]	83.82 [3.300]	33	68	3-103330-4
△	△	83.41 [3.284]	81.28 [3.200]	32	66	3-103330-3
△	△	80.87 [3.184]	78.74 [3.100]	31	64	3-103330-2
△	△	78.33 [3.084]	76.2 [3.000]	30	62	3-103330-1
△	△	75.79 [2.984]	73.66 [2.900]	29	60	3-103330-0
△	△	73.25 [2.884]	71.12 [2.800]	28	58	2-103330-9
△	△	70.71 [2.784]	68.58 [2.700]	27	56	2-103330-8
△	△	68.17 [2.684]	66.04 [2.600]	26	54	2-103330-7
△	△	65.63 [2.584]	63.5 [2.500]	25	52	2-103330-6
△	△	63.09 [2.484]	60.96 [2.400]	24	50	2-103330-5
△	△	60.55 [2.384]	58.42 [2.300]	23	48	2-103330-4
△	△	58.01 [2.284]	55.94 [2.200]	22	46	2-103330-3
△	△	55.47 [2.184]	53.34 [2.100]	21	44	2-103330-2
△	△	52.93 [2.084]	50.8 [2.000]	20	42	2-103330-1
△	△	50.39 [1.984]	48.26 [1.900]	19	40	2-103330-0
△	△	47.85 [1.884]	45.72 [1.800]	18	38	1-103330-9
△	△	45.31 [1.784]	43.18 [1.700]	17	36	1-103330-8
△	△	42.77 [1.684]	40.64 [1.600]	16	34	1-103330-7
△	△	40.23 [1.584]	38.1 [1.500]	15	32	1-103330-6
△	△	37.69 [1.484]	35.56 [1.400]	14	30	1-103330-5
△	△	35.15 [1.384]	33.02 [1.300]	13	28	1-103330-4
△	△	32.61 [1.284]	30.48 [1.200]	12	26	1-103330-3
△	△	30.07 [1.184]	27.94 [1.100]	11	24	1-103330-2
△	△	27.53 [1.084]	25.4 [1.000]	10	22	1-103330-1
△	△	24.99 [.984]	22.86 [.900]	9	20	1-103330-0
△	△	22.45 [.884]	20.32 [.800]	8	18	103330-9
△	△	19.91 [.784]	17.78 [.700]	7	16	103330-8
△	△	17.37 [.684]	15.24 [.600]	6	14	103330-7
△	△	14.83 [.584]	12.7 [.500]	5	12	103330-6
△	△	12.29 [.484]	10.16 [.400]	4	10	103330-5
△	△	9.75 [.384]	7.62 [.300]	3	8	103330-4
△	△	7.21 [.284]	5.08 [.200]	2	6	103330-3
△	△	4.67 [.184]	2.54 [.100]	1	4	103330-2
△	△	2.13 [.084]	—	—	2	103330-1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN J.MARTINELLI 190CT92	TE Connectivity			
DIMENSIONS: mm [INCHES]		CHK JOHN KNITTLE 23NOV92				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPD B.FLINCHBAUGH 23NOV92	NAME			
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± 0.13 [.005] 4 PLC ± - ANGLES ± -		APPLICATION SPEC	ASSY, HEDR, BRKAWAY, MOD II, DUBL ROW, .100X.100 C/L, RHT ANG, WITH .025 SQRE POSTS			
MATERIAL		WEIGHT	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
FINISH SEE TABLE		—	A1	00779	1033330	—
		CUSTOMER DRAWING		SCALE 4:1	SHEET 1 of 1	REV M5

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[892-18-020-10-001101](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [009176003701906](#) [0050291907](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#)
[609-3404](#) [61062-3](#) [61082-181009](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [641991-4](#) [644827-2](#) [65817-](#)
[010LF](#) [65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68645-018](#) [68648-049](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)
[4853B](#) [707-5020](#) [707-5028](#) [71.350.2428.0](#) [71918-208LF](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [79531-3000](#)
[FCN-360C032-B](#) [FCN-367T-T012/H](#) [FCN-723D010/2](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#)