
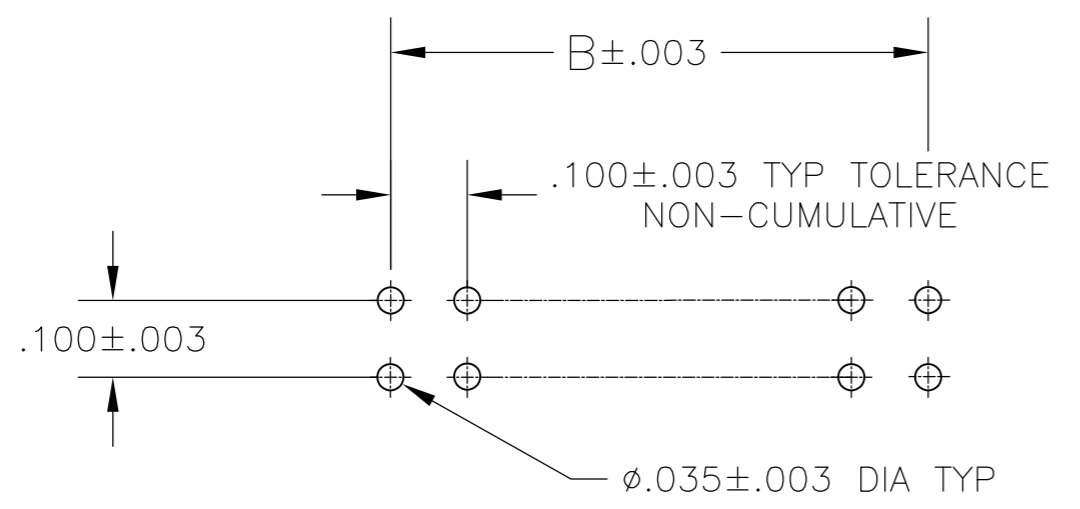


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
AD	00	M		REVISED PER ECO-14-000068	23APR2014	NK	MM

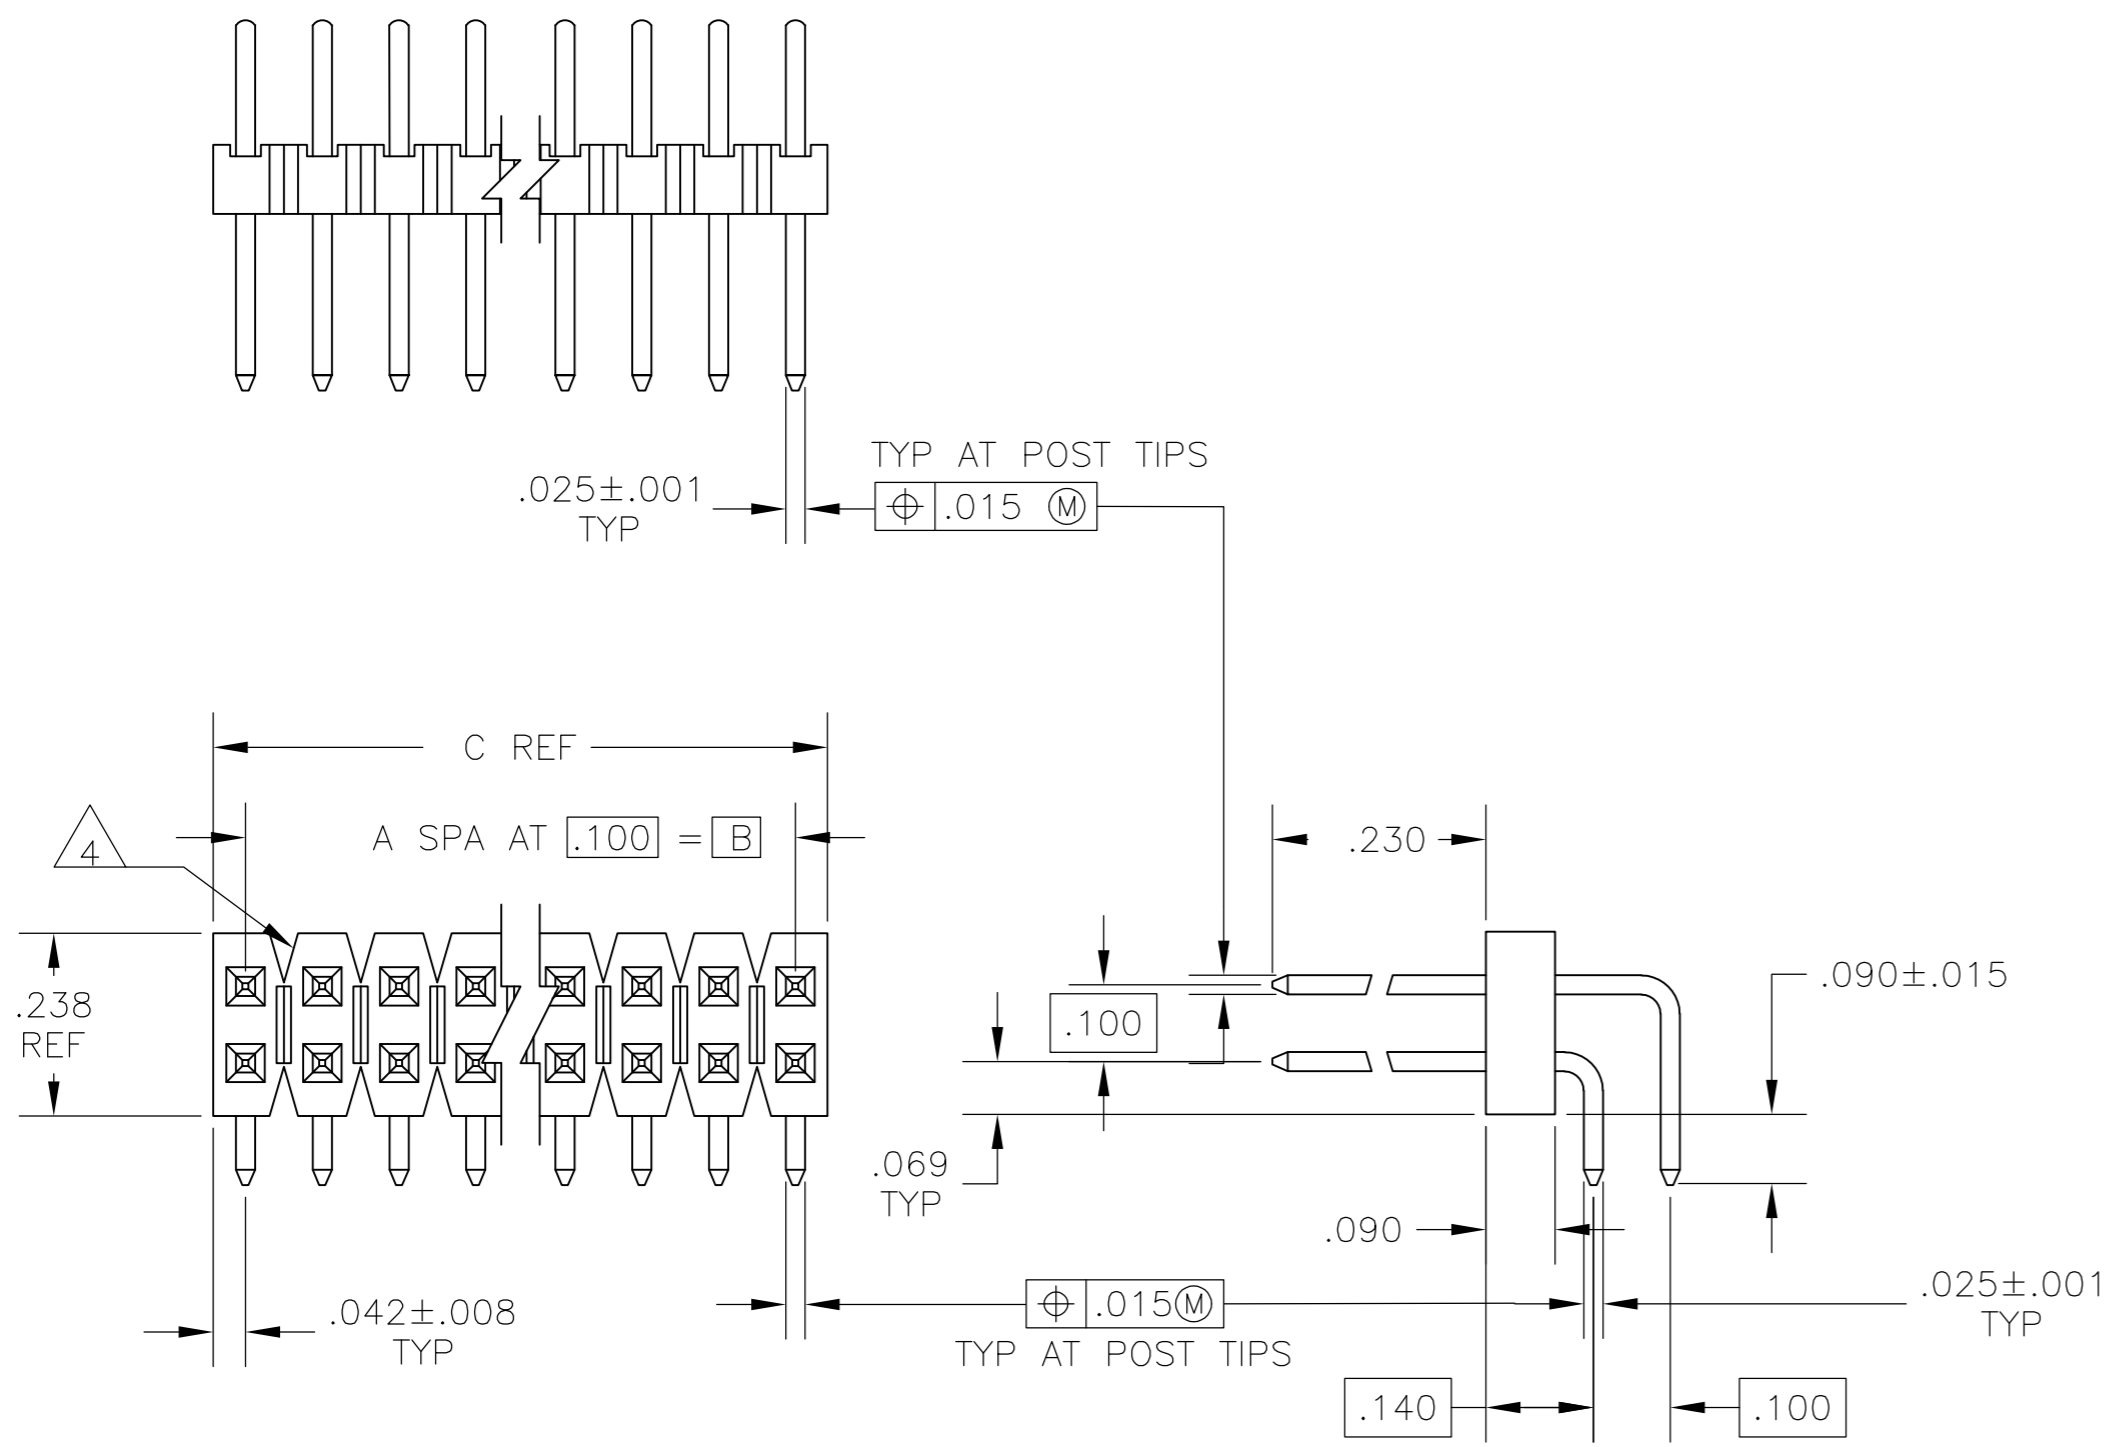

- 1 ASSEMBLIES MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
- 2 TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- 3 \triangle .000100-.000200 MATTE TIN-LEAD OVER .000050 NICKEL ENTIRE POST
- 4 \triangle BREAKAWAY NOTCH ANGLE CAN BE ORIENTED TO THE RIGHT (AS SHOWN) OR TO THE LEFT
- 5 \triangle .000100-.000200 BRIGHT TIN OVER .000050 NICKEL ENTIRE POST
- 6 \triangle PRELIMINARY PART-NOT RELEASED FOR PRODUCTION.
- 7 \triangle .000100-.000200 MATTE TIN OVER .000050 NICKEL ENTIRE POST
- 8 \triangle HIGH TEMP CONFIGURATION
- 9 \triangle OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

RECOMMENDED HOLE LAYOUT

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	30JUL85	TE TE Connectivity	
DIMENSIONS: INCHES		CHK	27AUG03		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME		ASSEMBLY, MOD II, HEADER, BREAKAWAY, DOUBLE ROW, RIGHT ANGLE, .100X.100 C/L, WITH .025 SQ. POSTS	
0 PLC ± -		APVD			
1 PLC ± -		PRODUCT SPEC		SIZE	RESTRICTED TO
2 PLC ± -		APPLICATION SPEC		CAGE CODE	DRAWING NO
3 PLC ± .005		WEIGHT		SCALE	SHEET
4 PLC ± -		CONTACT: COPPER ALLOY		4:1	1 OF 2
ANGLES ± -		FINISH		REV	M
SEE TABLE		CUSTOMER DRAWING		A2 00779 C=103795	

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

REMARKS	PLATING	C	B	A	NO OF POS	ASSEMBLY PART NUMBER
OBSOLETE		3.984	3.900	39	80	9-103795-0
OBSOLETE		3.884	3.800	38	78	8-103795-9
OBSOLETE		3.784	3.700	37	76	8-103795-8
OBSOLETE		3.684	3.600	36	74	8-103795-7
OBSOLETE		3.584	3.500	35	72	8-103795-6
OBSOLETE		3.484	3.400	34	70	8-103795-5
OBSOLETE		3.284	3.300	33	68	8-103795-4
OBSOLETE		3.284	3.200	32	66	8-103795-3
OBSOLETE		3.184	3.100	31	64	8-103795-2
OBSOLETE		3.084	3.000	30	62	8-103795-1
OBSOLETE		2.984	2.900	29	60	8-103795-0
OBSOLETE		2.884	2.800	28	58	7-103795-9
OBSOLETE		2.784	2.700	27	56	7-103795-8
OBSOLETE		2.684	2.600	26	54	7-103795-7
OBSOLETE		2.584	2.500	25	52	7-103795-6
OBSOLETE		2.484	2.400	24	50	7-103795-5
OBSOLETE		2.384	2.300	23	48	7-103795-4
OBSOLETE		2.284	2.200	22	46	7-103795-3
OBSOLETE		2.184	2.100	21	44	7-103795-2
OBSOLETE		2.084	2.000	20	42	7-103795-1
OBSOLETE		1.984	1.900	19	40	7-103795-0
OBSOLETE		1.884	1.800	18	38	6-103795-9
OBSOLETE		1.784	1.700	17	36	6-103795-8
OBSOLETE		1.684	1.600	16	34	6-103795-7
OBSOLETE		1.584	1.500	15	32	6-103795-6
OBSOLETE		1.484	1.400	14	30	6-103795-5
OBSOLETE		1.384	1.300	13	28	6-103795-4
OBSOLETE		1.284	1.200	12	26	6-103795-3
OBSOLETE		1.184	1.100	11	24	6-103795-2
OBSOLETE		1.084	1.000	10	22	6-103795-1
OBSOLETE		.984	.900	9	20	6-103795-0
OBSOLETE		.884	.800	8	18	5-103795-9
OBSOLETE		.784	.700	7	16	5-103795-8
OBSOLETE		.684	.600	6	14	5-103795-7
OBSOLETE		.584	.500	5	12	5-103795-6
OBSOLETE		.484	.400	4	10	5-103795-5
OBSOLETE		.384	.300	3	8	5-103795-4
OBSOLETE		.284	.200	2	6	5-103795-3
OBSOLETE		.184	.100	1	4	5-103795-2
OBSOLETE		.084			2	5-103795-1

REMARKS	PLATING	C	B	A	NO OF POS	ASSEMBLY PART NUMBER
		.384	.300	3	8	4-103795-1
		3.984	3.900	39	80	4-103795-0
		3.884	3.800	38	78	3-103795-9
		3.784	3.700	37	76	3-103795-8
		3.684	3.600	36	74	3-103795-7
		3.584	3.500	35	72	3-103795-6
		3.484	3.400	34	70	3-103795-5
		3.284	3.300	33	68	3-103795-4
		3.284	3.200	32	66	3-103795-3
		3.184	3.100	31	64	3-103795-2
		3.084	3.000	30	62	3-103795-1
		2.984	2.900	29	60	3-103795-0
		2.884	2.800	28	58	2-103795-9
		2.784	2.700	27	56	2-103795-8
		2.684	2.600	26	54	2-103795-7
		2.584	2.500	25	52	2-103795-6
		2.484	2.400	24	50	2-103795-5
		2.384	2.300	23	48	2-103795-4
		2.284	2.200	22	46	2-103795-3
		2.184	2.100	21	44	2-103795-2
		2.084	2.000	20	42	2-103795-1
		1.984	1.900	19	40	2-103795-0
		1.884	1.800	18	38	1-103795-9
		1.784	1.700	17	36	1-103795-8
		1.684	1.600	16	34	1-103795-7
		1.584	1.500	15	32	1-103795-6
		1.484	1.400	14	30	1-103795-5
		1.384	1.300	13	28	1-103795-4
		1.284	1.200	12	26	1-103795-3
		1.184	1.100	11	24	1-103795-2
		1.084	1.000	10	22	1-103795-1
		.984	.900	9	20	1-103795-0
		.884	.800	8	18	103795-9
		.784	.700	7	16	103795-8
		.684	.600	6	14	103795-7
		.584	.500	5	12	103795-6
		.484	.400	4	10	103795-5
		.384	.300	3	8	103795-4
		.284	.200	2	6	103795-3
		.184	.100	1	4	103795-2
		.084			2	103795-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN L. D. RINGLEY 30JUL85
 CHK J. GESFORD 27AUG03
 APVD J. GESFORD 27AUG03
 PRODUCT SPEC

TE Connectivity

ASSEMBLY, MOD II, HEADER, BREAKAWAY, DOUBLE ROW, RIGHT ANGLE, .100X.100 C/L, WITH .025 SQ. POSTS

SIZE A2 CAGE CODE 00779 C=103795 DRAWING NO RESTRICTED TO

WEIGHT - SCALE 1:1 SHEET 2 OF 2 REV M

CUSTOMER DRAWING

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[892-18-020-10-001101](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [009176003701906](#) [0050291907](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#)
[609-3404](#) [61062-3](#) [61082-181009](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [641991-4](#) [644827-2](#) [65817-010LF](#) [65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68645-018](#) [68648-049](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5020](#) [707-5028](#) [71.350.2428.0](#) [71918-208LF](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [79531-3000](#)
[FCN-360C032-B](#) [FCN-367T-T012/H](#) [FCN-723D010/2](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#)