
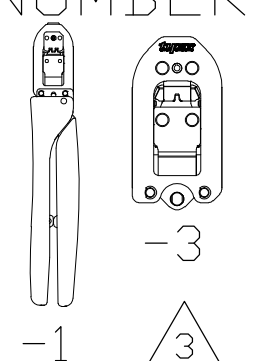
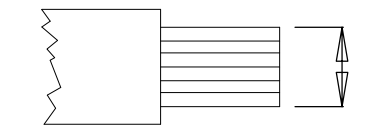
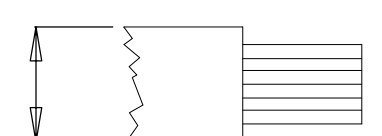
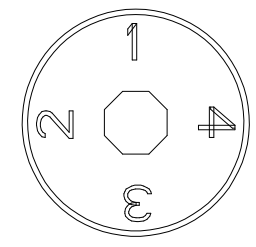
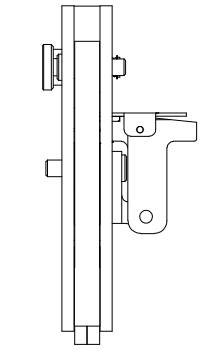
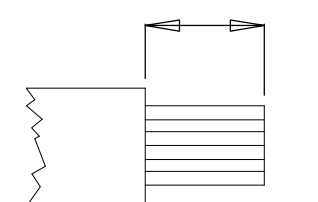
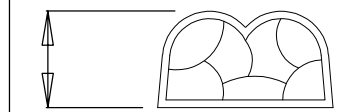
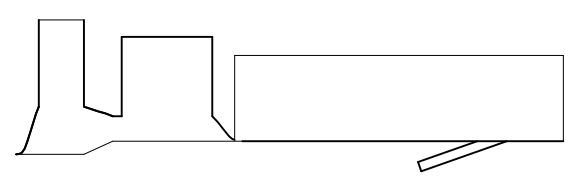


DIMENSIONING AND TOLERANCING PER ASME Y14.5M (ISO STANDARDS).  
 THIS DRAWING IS A CONTROLLED DOCUMENT.

TOOL NUMBER 	WIRE SIZE mm <sup>2</sup> [AWG] 	INSULATION DIAMETER mm [in.] 	INSUL. ADJ. 	FLIP LOCATOR 	STRIP LENGTH mm [in.] 	CRIMP HEIGHT mm [in.] 	CONTACT PART NUMBERS <sup>1</sup>		CONTACT DESCRIPTION	APPLIC. SPECIFIC.
							LOOSE PIECE 	STRIP FORM 		
91556-1 91556-3	0.12-0.38 [26-22] 0.50-0.60 [20]	1.10-1.60 [.043-.063] 1.25-1.90 [.049-.075]	YES	NO	3.2-3.7 [.126-.146]	0.69-0.78 [.027-.031] 0.83-0.93 [.033-.037]	170204-[ ]	170262-[ ]	"EI" Series Contacts	114-5035
91562-1 91562-3	0.05-0.08 [28-30] 0.13 [26]	1.00-1.20 [.039-.047] 1.10-1.30 [.043-.051]	NO	YES	3.2-3.7 [.126-.146]	0.60 ± 0.05 [.024 ± .002] 0.66 ± 0.05 [.026 ± .002]	170205-[ ]	170263-[ ]	"EI" Series Contacts	114-5035
91566-1 91566-3	0.14-0.22 [26-24] 0.29-0.52 [22-20]	1.10-1.60 [.043-.063] 1.25-1.90 [.049-.075]	NO	NO	3.2-3.7 [.126-.146]	0.54-0.69 [.021-.027] 0.68-0.83 [.027-.033]	170429-[ ]	170376-[ ]	"EI" Series Contacts	114-5035
91570-1 91570-3	0.05-0.09 [30-28] 0.12-0.15 [26]	1.00-1.20 [.039-.047] 1.10-1.30 [.043-.051]	NO	YES	3.2-3.7 [.126-.146]	0.52-0.63 [.020-.025] 0.58-0.70 [.023-.028]	170430-[ ]	170377-[ ]	"EI" Series Contacts	114-5035
91571-1 91571-3	0.12-0.22 [26-24] 0.30-0.35 [22]	1.10-1.50 [.043-.051] 1.35-1.90 [.053-.075]	NO	NO	2.5-3.5 [.098-.138]	0.69-0.83 [.027-.033] 0.69-0.83 [.027-.033]	170369-[ ]	170354-[ ]	Low Profile "EI" Series Contacts	114-5051

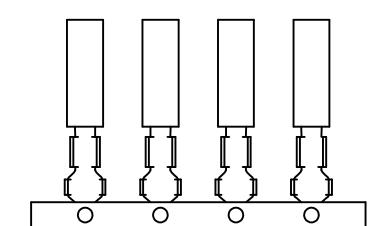

<sup>1</sup> LIST OF APPLIED CONTACT PART NUMBERS MAY NOT BE COMPLETE AND IS SUBJECT TO CHANGE. FOR CURRENT INFORMATION ON TERMINAL PART NUMBERS, CONTACT THE TOOLING ASSISTANCE CENTER : 1-800-722-1111.

2. AMP, CERTI-CRIMP, and "EI" are trademarks.

<sup>3</sup> -1 IS A CERTICRIMP II HAND TOOL ASSEMBLY.  
-3 IS A CERTICRIMP II HEAD SUB-ASSEMBLY.

4. THE HAND TOOL INSTRUCTION SHEET, ALSO KNOWN AS AN "IS", FOR MOST CERTI-CRIMP II TOOLS USE IS 408-8547. IF THE TOOL HAS A FLIP LOCATOR USE IS 408-10414.

## CERTI-CRIMP II DATA SHEET

DWN: M. YOUNGER 21FEB2012		MATERIAL: -		HEAT TREAT: -	
CHK: B.A. WOLFE 22FEB2012		APVD: B.A. WOLFE 22FEB2012			
NAME: B.A. WOLFE		SCALE: -			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		ANGLES: -	
0 PLC ± -		1 PLC ± -		SURFACE TEXTURE: 	
1 PLC ± -		2 PLC ± -		SCALE: -	
2 PLC ± -		3 PLC ± -		SIZE: A1	
3 PLC ± -		4 PLC ± -		DRAWING NO: 1583007	
4 PLC ± -		REVISION RECORD		SHEET 1 of 1	
P LTR		DATE: 2-2012		REV: C1	
DWN: MY BAW		DATE: 2-2012		REV: C1	

LOC: A  
DIST: 00

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Crimpers / Crimping Tools](#) category:*

*Click to view products by [TE Connectivity](#) manufacturer:*

Other Similar products are found below :

[010-0096](#) [M225201-06](#) [M225202-37](#) [6-1579015-5](#) [CT150-6-RH07](#) [622-6441LF](#) [M322](#) [6-304052-1](#) [63456-0054](#) [63484-3701](#) [63800-8355](#)  
[63819-1875](#) [63819-2875](#) [63819-4475](#) [64001-0975](#) [64005-0175](#) [662903-2](#) [690602-6](#) [7-1579001-9](#) [7-23471-1](#) [762637-1](#) [808714-1](#) [811242-5](#)  
[999-50-020083](#) [1-21002-3](#) [1-21002-7](#) [12085270](#) [1-21002-6](#) [1-21113-6](#) [1-22548-4](#) [125442-1](#) [DCE.91.073.BVC](#) [DCE.91.090.3MVM](#)  
[DCE.91.130.5MVU](#) [DCE.91.202.BVCM](#) [1338300-1](#) [1-354003-0](#) [1338301-1](#) [DF62/RE-MD](#) [142321](#) [1456088-1](#) [1490794-1](#) [1-45804-6](#)  
[1490357-2](#) [1490357-3](#) [AX100749](#) [1-59619-7](#) [1596970-1](#) [1-59619-8](#) [1901238-2](#)