

HIRSCHMANN MOBILITY



CELLULAR (2G/3G/4G)/ GNSS Screw Antenna

CGN 7026 SF S

Pt no.

920-641-...

- Combination antenna for positioning and data-services
- Terrestrial based transmission and satellite-based positioning
- Designed for installation on vehicles in harsh environmental

Subject to alterations

Technical data (920-641-001)

Cellular

Frequency range	Low: 698 - 960 MHz High: 1710 - 2690 MHz
Services	2G: GSM 850/900 MHz GSM 1800/1900 MHz 3G: UMTS 4G: LTE-bands 1 – 10, 12 – 20, 23, 25 26 – 30 33 – 41, 44
Gain	min. 0 dBi, max. 3 dBi
Polarization	Linear vertical
Impedance	50 Ohm
Return loss	typ. > 10 dB
Input power	2 W
Diagnosis Resistor	10 kOhm

GNSS

Frequency range	GPS (L1): 1563 – 1587 MHz Galileo (E1): 1559 – 1591 MHz GLONASS (G1): 1593 – 1610 MHz
Center frequency	1590,0 ±5 MHz
Antenna gain	typ. 2 dBic (Gain of passive antenna element)
Polarization	right handed circular (RHCP)
Axial ratio	min: 2 dB (In zenith at center frequency)
Power supply	3,0 V - 5,5 V
Current consumption	typ. 35 mA ±3 mA
LNA gain	typ. 21 dB ±2 dB (Input and output 50 Ω)
Noise figure	≤ 3,0 dB, typ. 2,8 dB (Input and output 50 Ω)
P1dB output	≥ 11,5 dBm (F = 1575 MHz)
IP3 input	>2 dBm (Test tones: F1: 1590 MHz / -30 dBm F2: 1591 MHz / -30 dBm)
LNA stopband rejection 1590MHz ±60MHz	> 60 dBc (Input to output of LNA)
Isolation GNSS/ Cellular @ GNSS connector in the GNSS frequency ranges)	> 20 dB (S21 of active antenna from Cellular to GNSS)
Isolation GNSS / Cellular @ 2G/3G/4G Frequencies connector in the Cellular frequency ranges)	> 50 dB (S21 of active antenna from Cellular to GNSS)

CELLULAR (2G/3G/4G)/ GNSS SCREW ANTENNA

CGN 7026 SF S Pt no. 920-641-...


Output impedance	50 Ω
Output VSWR	≤ 1,5
Mechanical	
Round mounting hole diameter / mm	typ. 20 max. 20,5
Thickness holder mm	min. 0,5 max. 6,0
Radius of curvature / mm	min. 1500 max. planar
Free space under mounting place / mm	min. h=25 x Ø35
Nut	PA6.6 GF30 white
Thread bolt diameter	18 x 1.5 mm
Tightening torque / Nm	min. 6 max. 7
Connector pulling force	typ. > 80 N
Cable pulling force	typ. > 80 N
Weight	ca. 296 g
Dimensions	95 mm x 57 mm x 69 mm
Environmental	
Operation and storage temperature range	typ. -40 °C max. 80 °C
Humidity	Non-condensing 55 °C 95% RH
Protection levels	For all antenna parts placed outside of the vehicle: IP 6K9K (ISO 20653) For the cable inlet of the antenna: IP67
Scope of supply	Antenna with hexagonal nut

¹⁾ dBi: referenced to an isotropic radiator, circular polarization

²⁾ dBi: referenced to an isotropic radiator

Versions		Cable type	CELL		GNSS	
920-641-101	CGN 7026 SF S	RG 174	200 mm	FAKRAM, Code D	150 mm	FAKRAM, Code C

Block Diagram

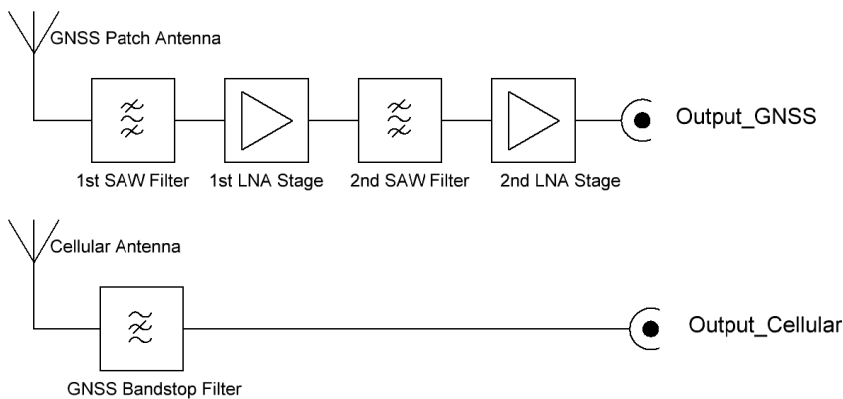

CELLULAR (2G/3G/4G)/ GNSS SCREW ANTENNA

CGN 7026 SF S Pt no. 920-641-...

Installation




Fig. 1



Fig. 2

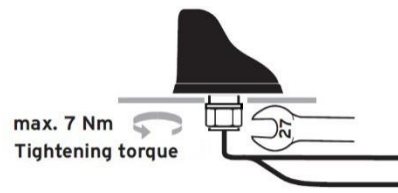


Fig. 3

Antenna Diagrams

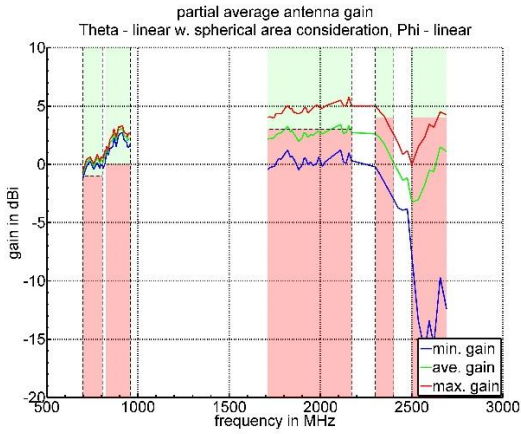


Fig. 1 4G,
Gain over frequency, ANTENNA GNSS/GSM

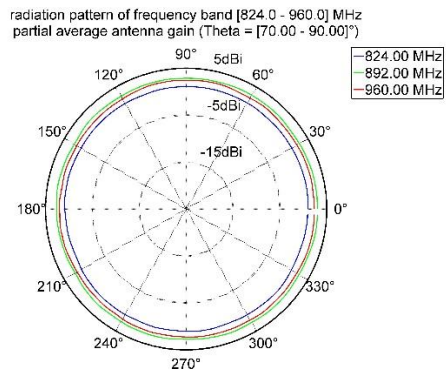
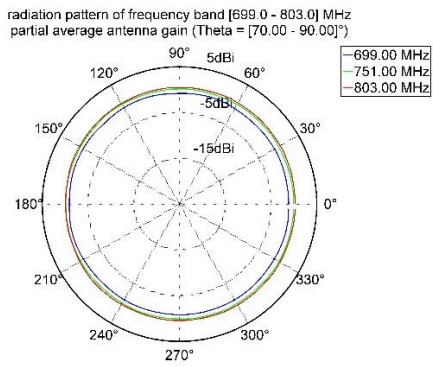


Fig. 2 4G,
Gain over phi, ANTENNA GNSS/GSM

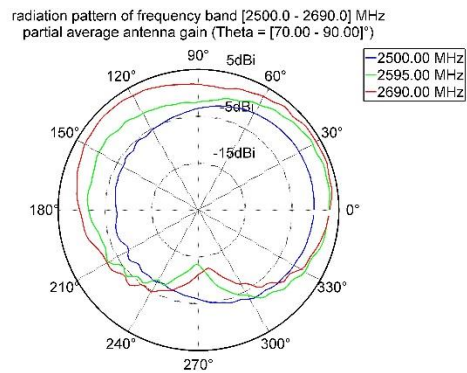
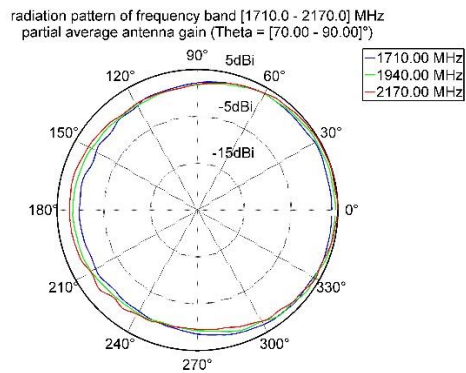


Fig. 3 4G,
Gain over phi,
ANTENNA GNSS/GSM

CELLULAR (2G/3G/4G)/ GNSS SCREW ANTENNA

CGN 7026 SF S Pt no. 920-641-...

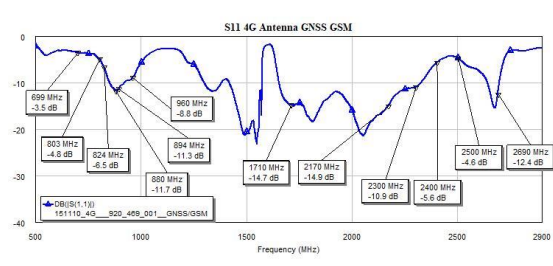


Fig. 4 4G,
S11, ANTENNA GNSS/GSM

www.te.com/hirschmann-mobility

hirschmann-mobility@te.com

TE, TE Connectivity, TE connectivity (logo), and EVERY CONNECTION COUNTS are trademarks. Hirschmann is a trademark.

LTE, GSM, UMTS, GLONASS and FAKRA are trademarks.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2019 TE Connectivity Ltd. family of companies All Rights Reserved.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Antennas](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[GAN30084EU](#) [930-033-R](#) [GW17.07.0250E](#) [1513563-1](#) [EXE902SM](#) [APAMPG-117](#) [MAF94383](#) [W3908B0100](#) [W6102B0100](#) [YE572113-30RSMM](#) [108-00014-50](#) [66089-2406](#) [SPDA17RP918](#) [A09-F8NF-M](#) [A09-F5NF-M](#) [RGFRA1903041A1T](#) [W3593B0100](#) [W3921B0100](#) [SIMNA-868](#) [SIMNA-915](#) [SIMNA-433](#) [W1044](#) [W1049B090](#) [A75-001](#) [WTL2449CQ1-FRSMM](#) [CPL9C](#) [EXB148BN](#) [0600-00060](#) [TRA9020S3PBN-001](#) [Y4503](#) [GD5W-28P-NF](#) [MA9-7N](#) [GD53-25](#) [GD5W-21P-NF](#) [C37](#) [MAF94051](#) [MA9-5N](#) [EXD420PL](#) [B1322NR](#) [QWFTB120](#) [MAF94271](#) [MAF94300](#) [GPSMB301](#) [FG4403](#) [AO-AGSM-OM54](#) [5200232](#) [MIKROE-2349](#) [WCM.01.0111](#) [MIKROE-2393](#) [MIKROE-2352](#)