





| REVISIONS | | | | | |
|-----------|-----|---------------|-----------|-----|------|
| P | LTR | DESCRIPTION | DATE | DWN | APVD |
| A | | ECR-21-000134 | 06JAN2021 | SS | RS |

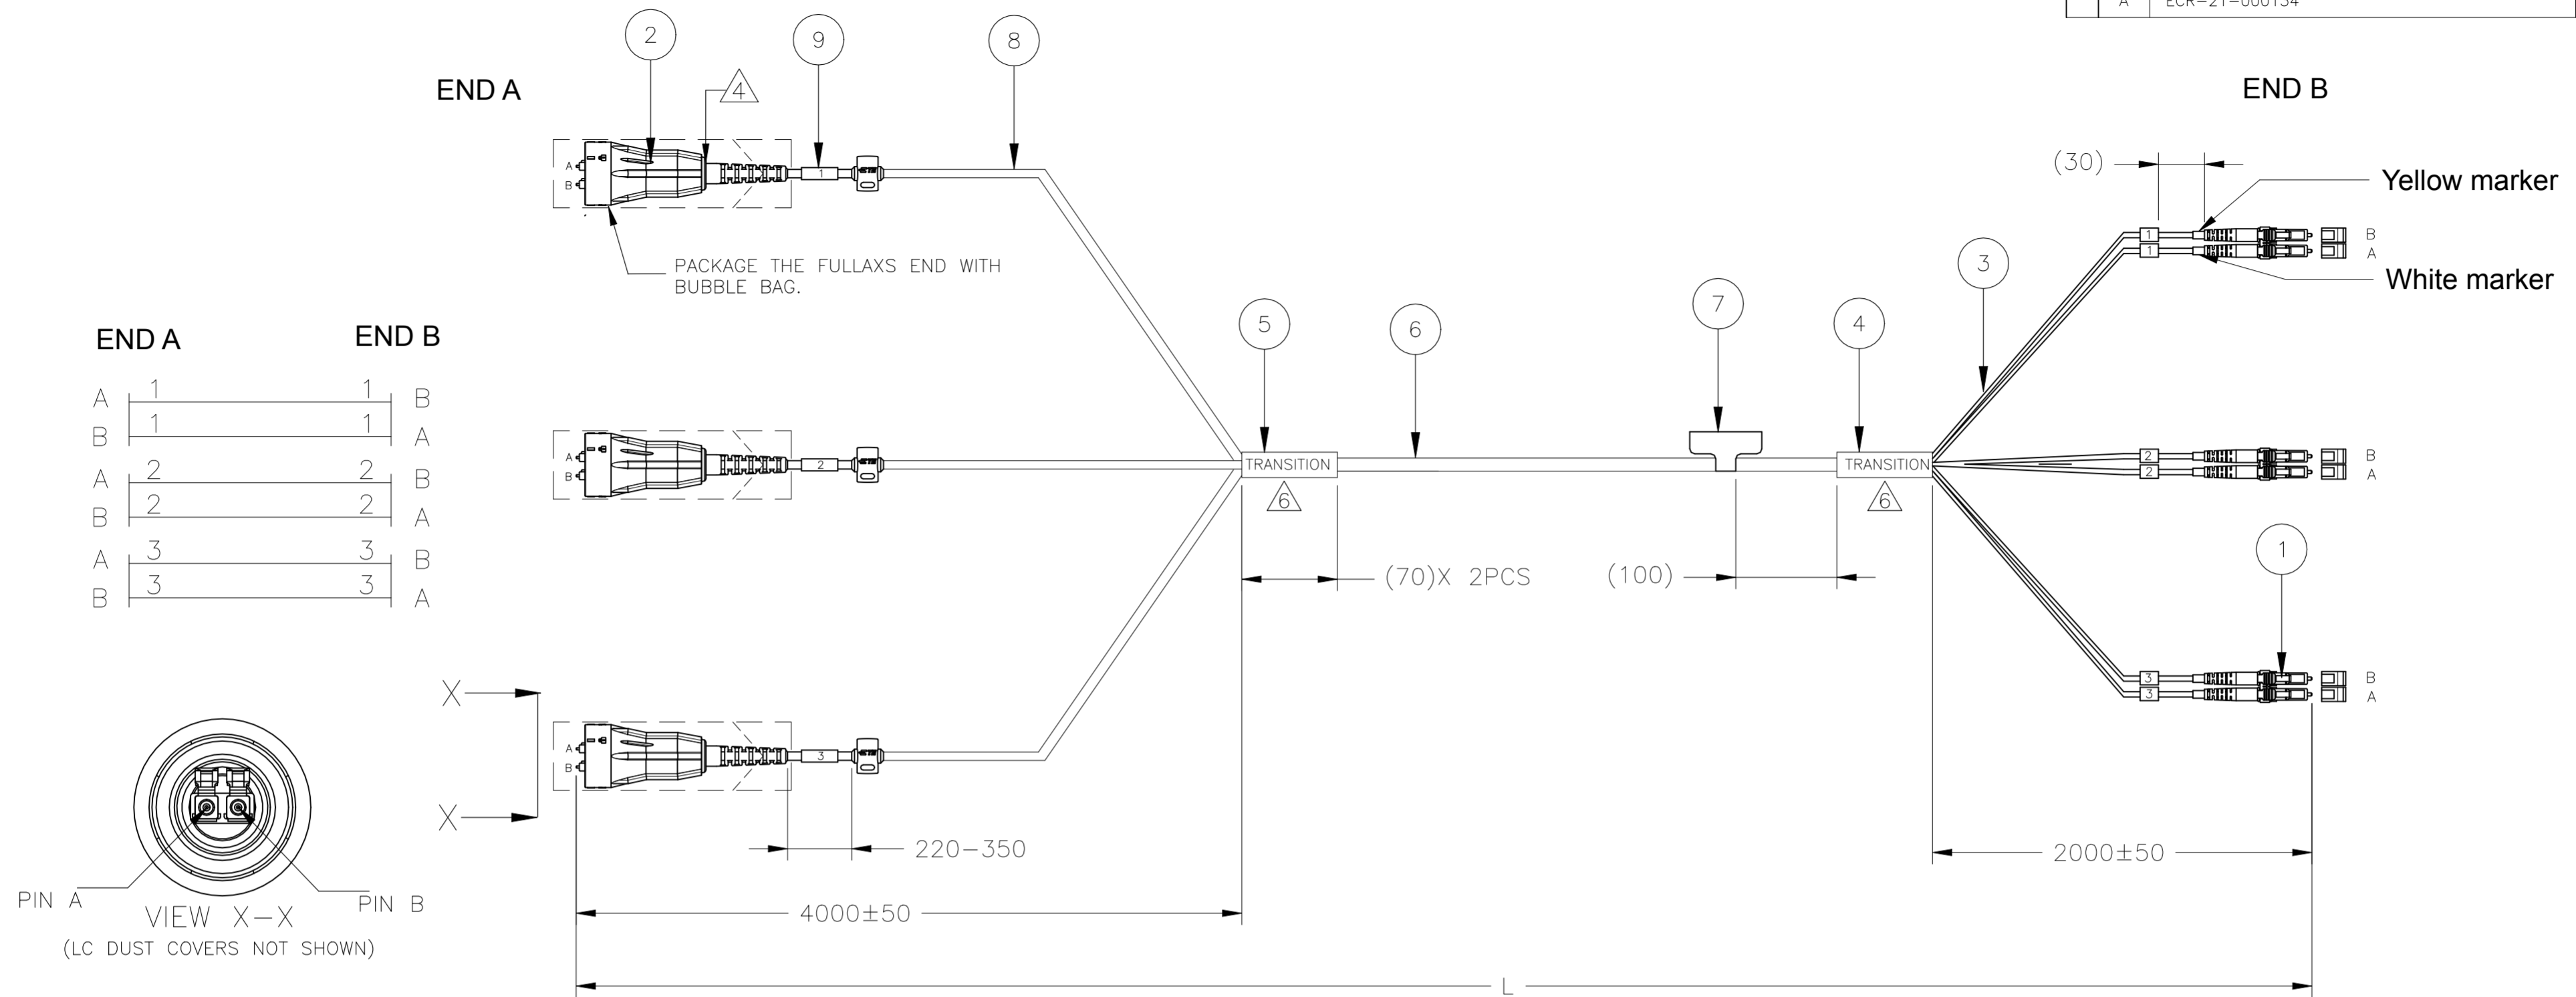

| END A | | END B | |
|-------|---|-------|---|
| A | 1 | 1 | B |
| B | 1 | 1 | A |
| A | 2 | 2 | B |
| B | 2 | 2 | A |
| A | 3 | 3 | B |
| B | 3 | 3 | A |

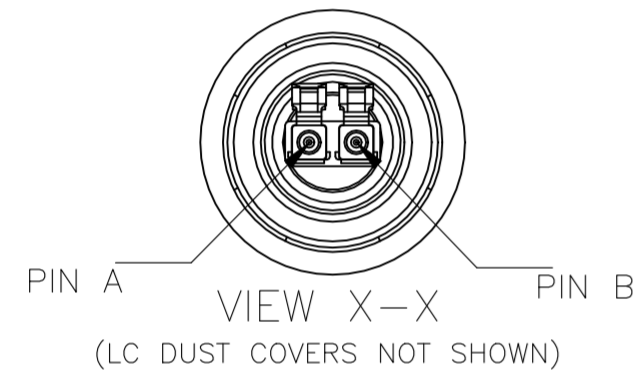

△ 3
DETAIL FOR REFERENCE ONLY

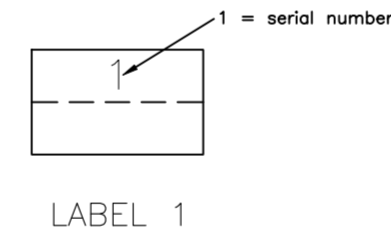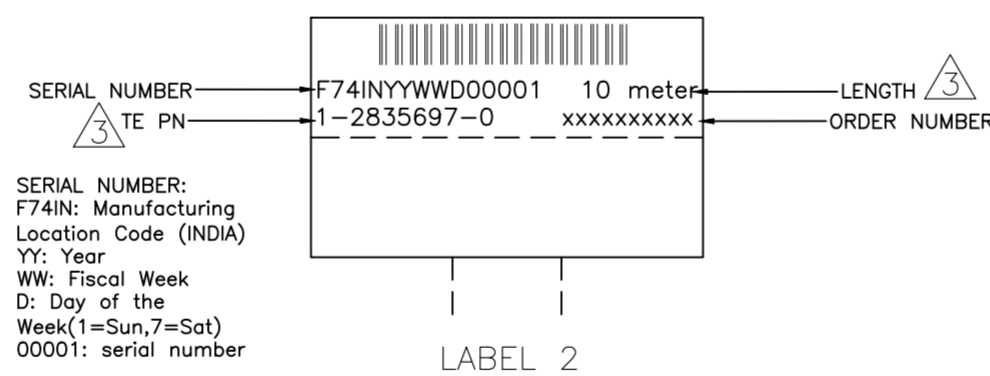

NOTES:

- 1 MAX. CONNECTOR ATTENUATION 0.3dB, MEASURED AT 1310 nm AND 1550 nm ACCORDING TO IEC 61300-3-4 INSERTION METHOD B
- 2 MIN. RETURN LOSS 50 dB, IN MATED CONDITION AGAINST REFERENCE CONNECTOR AT 1310 nm AND 1550 nm
- △ 3 INFORMATION ON LABEL, SEE DETAIL FOR EXAMPLE.
- △ 4 THE TAIL SEAL BETWEEN OUTER SHELL AND INNER BODY CAN MEET IP65 REQUIREMENT
- 5 CABLE INFORMATION:
 - CORE DIAMETER: 9/125um
 - OUTER JACKET DIAMETER: Ø5.8MM
 - OUTER JACKET COLOUR: BLACK
 - OUTER JACKET MATERIAL: LSZH
 - CABLE ATTENUATION:0.4dB/km @1310 nm OR 0.3dB/km @1550 nm
 - UL1666 & CPR: Dca-s2,d1,a1 COMPLIANCE
- △ 6 THE TRANSITION DEVICE MEETS IP67



| Qty | Description | Item |
|-----|---|------|
| 9 | MARKER LABEL 1 | 9 |
| L | Ø4.8MM PROTECTIVE TUBING, LSZH, BLACK | 8 |
| 1 | MARKER LABEL 2 | 7 |
| L | Ø5.8MM FO CABLE 6FIBER, SINGLE MODE G657A2, LSZH, BLACK | 6 |
| 1 | CABLE BRANCHING DEVICE, 3C | 5 |
| 1 | CABLE BRANCHING DEVICE, 6C | 4 |
| L | FLEXIBLE PROTECTION TUBE, LSZH, BLACK O.D 2 to 2.5mm | 3 |
| 3 | FULLAXS LC DUPLEX PLUG ASSEMBLY, BLACK | 2 |
| 3 | LC DUPLEX CONNECTOR, SINGLE MODE, BLUE | 1 |



| Description | | Item | |
|--|--|---|-----------|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | DWN | 20NOV2020 |
| | | CHK | 20NOV2020 |
| | | APVD | 20NOV2020 |
| DIMENSIONS: mm | | NAME: SIDDHARTH SINGH, HERBERT. ZHANG, ROGER SONG | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED: | | PRODUCT SPEC: - | |
| 0 PLC ± - | | APPLICATION SPEC: - | |
| 1 PLC ± - | | WEIGHT: - | |
| 2 PLC ± - | | SCALE: A2 | |
| 3 PLC ± - | | CAGE CODE: 00779 | |
| 4 PLC ± - | | DRAWING NO: C=2835697 | |
| ANGLES ± - | | RESTRICTED TO: - | |
| FINISH: - | | SHEET: 1 of 2 | |
| MATERIAL: - | | REV: A | |
| CUSTOMER DRAWING | | SCALE: NTS | |

REVISIONS

| P | LTR | DESCRIPTION | DATE | DWN | APVD |
|---|-----|-------------|------|-----|------|
| - | - | SEE SHEET 1 | - | - | - |

| LENGTH "L" IN MM | TOLERANCE |
|------------------|-----------|
| L ≤ 50000 | ±1% |
| L > 50000 | ±1% |

| PART NUMBER  | DESCRIPTION |  LENGTH (Meters) | REMARKS |
|---|-----------------------------------|---|---------|
| 1-2835697-0 | FOSM 6F FULLAXS LC-LC DUPLEX,10m | 10±0.10 | |
| 2-2835697-0 | FOSM 6F FULLAXS LC-LC DUPLEX,20m | 20±0.20 | |
| 3-2835697-0 | FOSM 6F FULLAXS LC-LC DUPLEX,30m | 30±0.30 | |
| 5-2835697-0 | FOSM 6F FULLAXS LC-LC DUPLEX,50m | 50±0.50 | |
| 7-2835697-0 | FOSM 6F FULLAXS LC-LC DUPLEX,70m | 70±0.70 | |
| 9-2835697-9 | FOSM 6F FULLAXS LC-LC DUPLEX,100m | 100±1.0 | |
| 9-2835697-8 | FOSM 6F FULLAXS LC-LC DUPLEX,150m | 150±1.5 | |
| 9-2835697-6 | FOSM 6F FULLAXS LC-LC DUPLEX,250m | 250±2.5 | |

| | | | | |
|---|-------------|---|---|--------------------|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | DWN SIDDHARTH SINGH 20NOV2020 |  TE Connectivity | |
| | | CHK HERBERT. ZHANG 20NOV2020 | | |
| | | APVD ROGER SONG 20NOV2020 | NAME FOSM 6F FULLAXS LC-LC DUPLEX | |
| DIMENSIONS: mm | | TOLERANCES UNLESS OTHERWISE SPECIFIED: | PRODUCT SPEC - | |
|  | | 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± - | APPLICATION SPEC - | |
| MATERIAL - | FINISH - | WEIGHT - | SIZE A2 | CAGE CODE 00779 |
| CUSTOMER DRAWING | | | DRAWING NO C=2835697 | RESTRICTED TO - |
| | | | SCALE NTS | SHEET 2 OF 2 |
| | | | REV A | |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fibre Optic Cable Assemblies](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[7-21002-9](#) [760-1518](#) [FA04390-50-M-72-LC-N](#) [MLB 501 V RED](#) [MLB 501 V YELLOW](#) [1-3636-600-5208](#) [2061529-7](#) [1-6693182-0](#)
[1754898-1](#) [21055-6](#) [FXBSCSCE2LM002](#) [3000005](#) [3-21053-2](#) [MLB 200/1 V BLACK](#) [MLB 2001 V RED](#) [MLB 2001 V YELLOW](#) [MLB 501](#)
[V BLACK](#) [5492011-6](#) [106284-7000](#) [5492011-5](#) [5492011-8](#) [5492011-9](#) [8-21007-5](#) [2123524-2](#) [2123524-1](#) [106386-4447](#) [DFSM-SCSC-2M](#)
[2123909-4](#) [2123909-8](#) [106273-0629](#) [2125046-1](#) [2821236-3](#) [2821310-2](#) [2821310-3](#) [2821313-4](#) [FX2ERLNLNSNM0.5](#) [CF-980062-074](#) [CF-](#)
[901200-394](#) [CF-980062-073](#) [CF-980062-071](#) [CF-980062-075](#) [CF-980062-072](#) [17-300310-100](#) [2821236-2](#) [2821313-1](#) [G-FC-FC-S-002.0-DX-](#)
[A-18-Y](#) [G-E2A-E2A-S-003.0-SX-A-18-Y](#) [956-322-502214](#) [FA04474](#) [1083665](#)