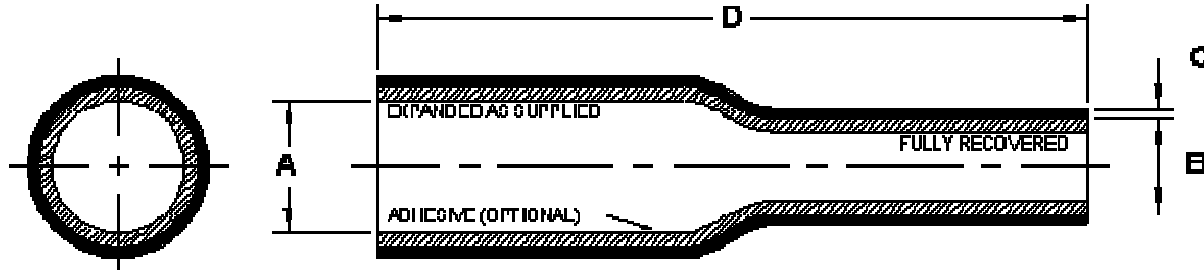


**URHT**  
**Ultra-high Ratio Heat-Shrink Tubing**



**Table 1: Dimensions, inch (mm)**

PART DESCRIPTION (See Adhesive)	(A) Min. Exp. ID	(B) Max. Rec'd. ID	(C) Ref. Rec'd. Wall Thickness	Unrestricted Full Recovered Length (D) ± .25 (6)
URHT-200	2.00 (51)	0.23 (6)	0.14 (3.5)	3, 4, 6, 10 (76, 102, 152, 254)
URHT-300	3.00 (76)	0.34 (9)	0.14 (3.5)	3, 4, 6, 10 (76, 102, 152, 254)

**Material:** Flame retarded, black, cross linked polyolefin.

**Adhesive (optional):** Factory hot melt adhesive may be applied. Specify adhesive type number /42 (e.g. URHT-200/4/42-0).

**Customer Drawing**

	Tyco Electronics Corporation 305 Constitution Drive Menlo Park, CA 94025 USA		<b>Raychem Tubing</b>	Title: <p style="text-align: center;"><b>URHT</b> <b>Ultra-High Ratio Heat-Shrink Tubing</b></p>		
	Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.			Document No. <p style="text-align: center;"><b>URHT-X</b></p>		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. METRIC DIMENSIONS ARE SHOWN IN BRACKETS.				Rev: E	Rev. Date: November 13, 2007	
DRAWN BY: U.NGUYEN	CAGE CODE: 06090	Org. Date: 01/09/02	File name: URHT-X.doc	SCALE: None	SIZE: A	SHEET: 1 of 2

**Table 2: Properties**

	<b>Property</b>	<b>Performance</b>	<b>Test Method</b>
<b>Physical</b>	Tensile Strength	1200 psi (8.3 Mpa) minimum	ASTM D-412
	Ultimate Elongation	250% minimum	ASTM D-412
	Specific Gravity	1.4 maximum	ASTM D-792
	Water Absorption	0.5% maximum	ASTM D-570 A
	Hardness	35 ± 5 Shore D	ASTM D-2240
	Flammability	Pass	ASTM D-635
	Corrosion Resistance	Pass	MIL-I-81765
	Low Temperature Flexibility 4 hours at -67 ± 2°F (-55 ± 1°C)	Pass	MIL-I-81765
	Heat Resistance 168 hours at 347 ± 2°F (175 ± 1°C)	Ultimate elongation, 200% minimum Tensile strength, 1000 psi (6.9 Mpa) minimum	MIL-I-81765
	Heat Shock 4 hours at 437 ± 5°F (225 ± 2°C)	No cracking, dripping or flowing	MIL-I-81765
<b>Elastic Memory</b>		275% minimum expansion to 4 inch (10 cm) of a fully recovered test specimen and 93% recovery of expanded specimen after oven conditioning for 1 minute at 302 ± 4°F (150 ± 2°C)	
<b>Electrical</b>	Dielectric Strength	200 v/mil (7880 v/mm) minimum	ASTM D-149
	Volume Resistivity	10 <sup>12</sup> ohm-cm minimum	ASTM D-257
<b>Chemical Fluid Resistance</b>		Ultimate elongation, 200% minimum Tensile strength, 750 psi (5.2 Mpa) minimum	MIL-I-81765
<b>Operating Temperature</b>		-131 to + 275°F (-55 to +135° C) without adhesive	

**Customer Drawing**

Rev. Date: November 13, 2007	Rev: E	Document No. <b>URHT-X</b>	Sheet: 2 of 2
---------------------------------	-----------	-------------------------------	------------------

If this document is printed it becomes uncontrolled. Check for the latest revision.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [TE Connectivity](#) manufacturer:*

Other Similar products are found below :

[D38999/24FJ4AN](#) [570416-000](#) [CLTEQ-M81CE-SSRELAY-4-20V](#) [4-1195131-0](#) [650069-000](#) [SMD100-2](#) [358838-000](#) [CB-1022B-78](#)  
[RM707012](#) [RP410012](#) [MMS42](#) [1-640426-8](#) [2EDL4CM](#) [DTS20W19-11PD-3028-LC](#) [RM202615](#) [NC6-P104-06](#) [MSPS103B](#) [DTS26F21-](#)  
[41HE-LC](#) [DTS26F21-41AE](#) [DTS26F21-41PE-LC](#) [DTS26F21-11SE-3028-LC](#) [30DCB6](#) [1932144-1](#) [293545-4](#) [LVR125S](#) [MS27466T25F4PB](#)  
[CKB-38-78010](#) [TR04AI-TINELLOCKRING](#) [1206SFF150F/63-2](#) [D38999/20JB35HA](#) [TE1500A2R2J](#) [D38999/20WC8BB](#) [DTS24F19-11SC-](#)  
[3028-LC](#) [D38999/24WG11HA](#) [D38999/24WG11HN](#) [MS27467T21F11H](#) [DJT16E21-11HA](#) [MS27467T21F35J](#) [MS27467T21F11J](#)  
[MS27467T21F16H-LC](#) [MS27467T21F35H](#) [MS27467T21F41H-LC](#) [1206SFH150F/24-2](#) [RP330024](#) [DJT16E21-11PA-LC](#) [DJT16E21-11HA-](#)  
[LC](#) [DJT16E21-11AA](#) [MS27467T21B11JA](#) [DJT16E21-11JA](#) [MS27467T21B11JA-LC](#)