

AM SERIES RECEPTACLES

LOCKING TYPE, WEATHERPROOF, LONG LASTING

KEY FEATURES

- Phosphor bronze contacts
- Thermal-set phenolic base
- UL recognized component
- Extremely reliable and versatile
- Meets ANSI C136.10

Our AM series offers a long life and weatherproof locking style receptacle. The AM Series is designed specifically for street, roadway and outdoor lighting applications.

This 3-pole, 3-wire locking type receptacle conforms to the ANSI, NEMA, and UL standards for lighting receptacles. The AM-1-A and AM-2-A includes mounting brackets.

Common uses for the AM Series Receptacles include roadway, park, and parking lighting.

Customers can count on consistent, high quality products, driven by TE's proven innovation and backed by our extraordinary customer support.




AM Series Receptacles


Figure A: Side profile

Figure B: Top View





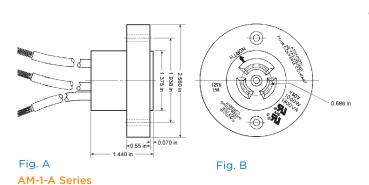

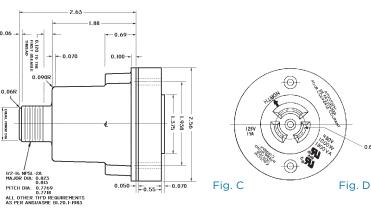

AM-2-A Series

Includes AM-1-A Series Figure above along with the Aluminum lower housing

Figure C: Side profile Figure D: Top View

SPECIFICATION - DIMENSIONS IN INCHES (MM)								
Physical	Dimensions: approx. 2.56" [65.02mm] x 1.44" [36.58mm] high (not including wires)							
	Designed to meet ANSI C136.10							
Nipple	1/2" - 14NPSL as per ANSI/ASME B1.20.1 (AM-2A and AM-2-A-NB)							
Housing	Aluminum Casting (AM-2-A and AM-2-A-NB)							
Bracket	Aluminum							
Lead Wires	#14 AWG, rated 105°C							

PRODUCT SELECTION INFORMATION - DIMENSIONS IN INCHES											
Description	Range (Volts)	Load Rating Ballast (VA)	Load Rating Ballast (Amps)	Flange Diameter	Receptacle Barrel Diameter	Overall Height	Lead Wire Length	Bracket (inches) Width Depth Height			
AM-1-A	120 - 480	1800	15.0	2 - 9/16	1 - 3/8	1 - 1/2	9	2.0	3	5 - 1/2	
AM-1-A-NB	120 - 480	1800	15.0	2 - 9/16	1 - 3/8	1 - 1/2	9	-	-	-	
AM-2-A	120 - 480	1800	15.0	2 - 9/16	-	3 - 1/4	6	2.0	3	5 - 1/2	
AM-2-A-NB	120 - 480	1800	15.0	2 - 9/16	-	3 - 1/4	6	-	_	-	



te.com/energy

©2019 TE Connectivity. All Rights Reserved. E354-0719-EN

Raychem, TE, TE Connectivity and the TE connectivity (logo) are trademarks of the TE Connectivity Ltd. Family of companies. Other logos, product and Company names mentioned herein may be trademarks of their respective owners. While TE has made every reasonable effort to ensure the accuracy of the information in this brochure, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this brochure are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications

FOR MORE INFORMATION: TE Technical Support Centers

USA: + 1 800 327 6996 + 33 380 583 200 France: UK: + 44 0870 870 7500 Germany: + 49 896 089 903 Spain: + 34 916 630 400 + 39 333 250 0915 Italy: Benelux: + 32 16 508 695 +1 (905) 475-6222 Canada: Mexico: + 52 (0) 55-1106-0800 Latin/S. America: + 54 (0) 11-4733-2200 China: + 86 (0) 400-820-6015



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Sensor Fixings & Accessories category:

Click to view products by TE Connectivity manufacturer:

Other Similar products are found below:

F03-01 SUS304 BINIL 8000-5130 FH-AP1 PH-1-10M PH-1-20M PH-2-30M AC201 R4 ADI-LC3S EC18-WELL PC-15015 K35-4 A-1923 SS-12143 STA12 AP4-T PH-1-50M R6 D01051301 43912557-020 MF-1 D=3.2 BGN-035 E39-L7 ZX-SB11 D01070602 606072 606075 Y92ES12PVC4A10ML Y92ES12PVC4S5ML SA9Z-F11 Z49-SF1 ZFV-XMF2 E4R-R12A-CS3M010 ZX-SW11E V3 CCS-PL-LDR2-70 E4R-R12A-CS3M020 BS-1T CHITAN F03-01 CHITAN CCS-PD2-1012 PH-2-90M PH-2-5M XMLZL008 AC244 28810-1 PH-1-40M SS-12225 32043-500 81532111 PH-2-60M ZG2-XC15CR