



Relays, Contactors & Switches > Switches > Slide Switches

Configuration (Pole-Throw): **Double Pole - Double Throw**

Mounting Angle: **Right Angle**

Contact Base Material: **Copper Alloy**

Number of Actuators: **Single**

Number of Positions: **2**

Features

Product Type Features

Threaded Case	Without
Grade	Telecom
Switch Type	Slide
Product Type	Switch
Switch Style	Auto-Insertable
Terminal Configuration	Standard
Actuator Style	Extended, Side

Configuration Features

Configuration (Pole-Throw)	Double Pole - Double Throw
Number of Actuators	Single
Number of Positions	2

Body Features

Actuator Material	Nylon
Actuator Color	White

Contact Features

Contact Base Material	Copper Alloy
Contact Current Rating	.3 A
Switch Contact Plating Material	Silver

Termination Features

Termination Type	PC
------------------	----

Mechanical Attachment

PCB Mount Retention	Without
---------------------	---------



Mounting Angle	Right Angle
----------------	-------------

Mounting Type	Surface Mount
---------------	---------------

Dimensions

Actuator Length	2.79 mm[.1098 in]
-----------------	-------------------

Width	7.37 mm[.2902 in]
-------	-------------------

Length	10.16 mm[.4 in]
--------	-----------------

Identification Marking

Stamped Marking	With
-----------------	------

Industry Standards

UL Flammability Rating	UL 94V-0
------------------------	----------

Packaging Features

Packaging Method	Tube
------------------	------

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Not Yet Reviewed
------------------------------	------------------

EU ELV Directive 2000/53/EC	Not Yet Reviewed
-----------------------------	------------------

China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
---	--------------------------------------

EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2019 (197) Candidate List Declared Against: JUN 2016 (169)
--	--

Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
-----------------	--

Solder Process Capability	Reflow solder capable to 245°C
---------------------------	--------------------------------

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE's information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) 'Guidance on requirements for substances in articles' (Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of 'complex object', the threshold for a SVHC must be applied to both the product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling

based on the new ECHA "Guidance on requirements for substances in articles" (June 2017, version 4.0) and will be updating its statements accordingly.

Also in the Series | [Alcoswitch ASE/F](#)




Slide Switches(63)

Customers Also Bought




TE Part #207612-7
SKT HDR ASSY, 10 P,
MMATE LF

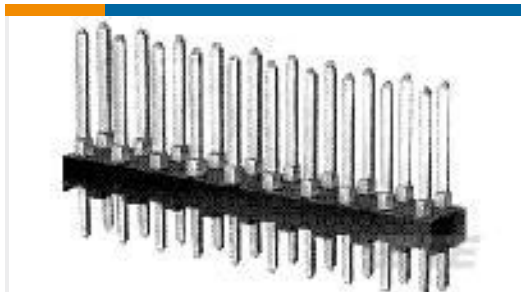


TE Part #1-87215-3
22 MODII HDR DRST
UNSHRD .100



TE Part #3-582340-9
TEST PROBE REC130H BI-
MT WHT GPBR



TE Part #5-1437581-9
ASF22GL=DPDT
AUTOSLIDE L BEND

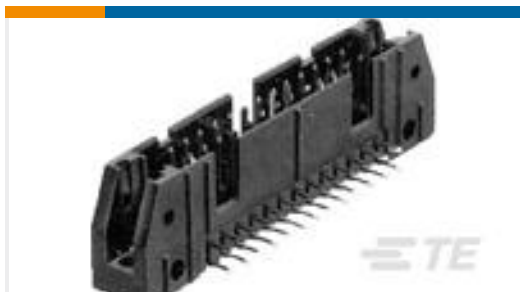

TE Part #1-102160-1
060 UNIV HDR RA 4S 30DP
STD



TE Part #1-1437597-1
2SKF231AEL01=NON UL
KEYLOCK



TE Part #747460-1
15 APFL RCPT RA 590



TE Part #2331373-1
DET SW3.50X2.8X1.5 JB
VERT. NO AG RL



TE Part #2331390-1
DET SW5.7X4.0X2.0 GW
HORZ. NC AG RL

Documents

[Product Drawings](#)
[ASE22RL=AUTOSLIDE DP](#)
English



[Product Environmental Compliance](#)

[TE Material Declaration](#)

English

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Slide Switches](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[6-1437581-1](#) [M43R](#) [MHS123K15D](#) [MHSS1104A](#) [MMD](#) [GH36W010001](#) [GH49S010001](#) [GH49WW00001](#) [1437576-8](#) [EPS1PC1](#) [1825074-1](#)
[1825160-3](#) [1825167-2](#) [25139NLDB](#) [25436NLDB](#) [25449NAH](#) [25536NA](#) [L101011ML04B](#) [SLB1240R45](#) [SLSA12004](#) [1825078-1](#) [1825080-](#)
[4](#) [1825081-1](#) [1825269-1](#) [1825270-2](#) [STS141RA04](#) [T2215BEN506](#) [GF-124-0204](#) [GH46P000001](#) [GH46W000001](#) [GH49P010001](#) [25339NA](#)
[25436NLDH](#) [CST91246FK](#) [TG36P000000](#) [TG36P000050](#) [47227LFE](#) [49331L](#) [MHSS1105A](#) [50208L](#) [HW4S-5LF22N3](#) [L202091MS02Q](#) [4-](#)
[1437581-7](#) [X2225CR-437W](#) [48BFSP3M2QT](#) [49329L](#) [1101M1S3ZB8E2](#) [1-1437581-1](#) [EG1218REDACTUATOR](#) [TG39W000000](#)