
SPECIFICATION CONTROL DRAWING

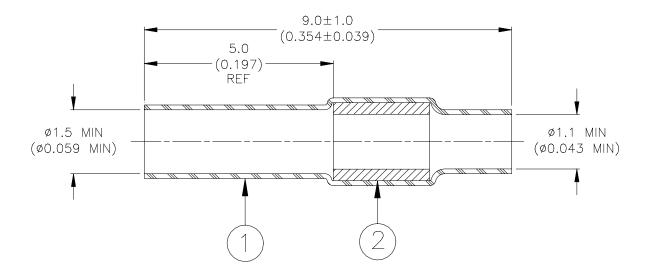


MATERIALS

- 1. INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked modified polyvinylidene fluoride.
- 2. MELTABLE SEALING RING: Thermally stabilized thermoplastic. Color clear.

APPLICATION

- 1. This device is used to terminate and seal the end of a cable or to terminate and seal a cable shield.
- 2. For installation, position the end of the cable half way inside the insert (item 2).
- 3. Heat with Miniray, IR 500 or IR 550 until insert melts.

For best results, prepare the cable as shown:

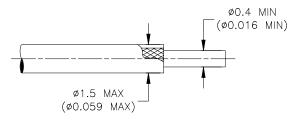

Electronics 307 Constitution Drive Menlo Park, CA 94025				Hai	ire and rnessing roducts	TIT	SEALING SLEEVE				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE BETWEEN BRACKETS.							DOCUMENT NO.: B-006-09				
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ROUGHNESS IN the s		drawing a	aychem reserves the right to amend this rawing at any time. Users should evaluate as suitability of the product for their oplication.			DCR NUMBER: D001344		REPLACES: N/A		
DRAWN BY: D. M. FORONDA		DAT	E: 18-Jan-0)1	PROD. REV. C		DOC ISSUE: 1	SCALE: None	SIZE:	SHEET: 1 of 1	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Solder Sleeves & Shield Tubing category:

Click to view products by TE Connectivity manufacturer:

Other Similar products are found below:

899170-000 620040N001 620069N003 CTA-0050-01 629624-000 6500750004 6501390002 CX0781-000 696396-000 697080-000 D-150-0331CS2902 D-181-1222-90/9CS2800 D-300-01CS1108 715325N001 908357N001 982127-1 D-436-0182CS246 D-436-37CS2651 D-436-61CS246 D-436-82-CS2621 D-659-0087 E53797N001 CB0213-000 CB0219-000 S200-2-01 S200-4-00CS2904 LSS-81-16AA-CS5575 ST18-2-00 FLX40-020-04-CS8651 325534-000 CTA-0025 D-108-07CS436 D-128-0010 D-141-0108CS404 D-144-41CS1371 D-150-0231-NRCS2896 D-150-1011 395947-000 427243N001 B-801-18-01 515-9 C67137-000 CB0220-000 D-436-0185CS1102 D-436-36CS2908 D-436-37CS2908 D-436-52CS246 D-436-83CS2705 D44133N001 LSS-26-8A