


CUSTOMER DRAWING

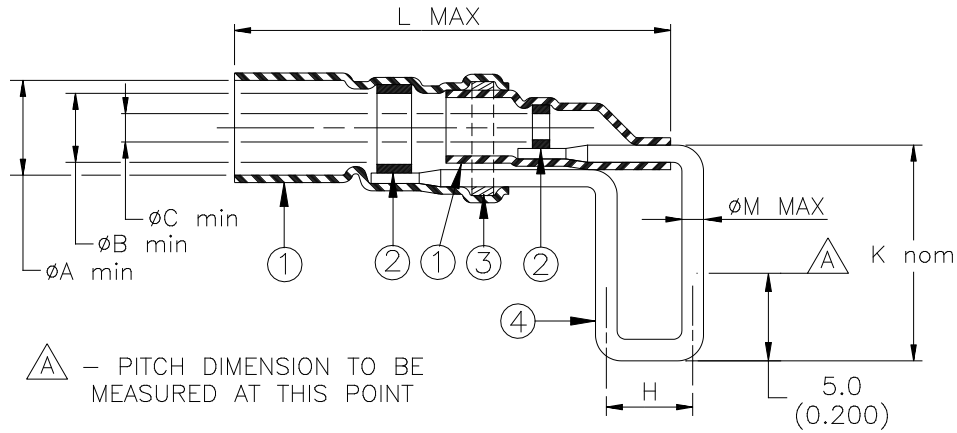

Pin Dimensions		Product Dimensions						Cable Dimensions		
$\phi M \text{ max} = 0.68$ (0.027)	$\phi M \text{ max} = 0.88$ (0.035)									
Product Name	Product Name	Pitch $H \pm 0.3$ ($H \pm 0.012$)	ϕA min	ϕB min	ϕC min	L max	K nom	ϕD	ϕE	ϕF min.
B-046-14-N		2.54(0.10)	3.4 (0.135)	2.3 (0.090)	0.8 (0.030)	28 (1.100)	14 (0.550)	1.7(0.065) to 3.4(0.135)	1.3(0.050) to 2.3(0.090)	0.3 (0.012)
B-046-10-N	B-046-11-N	5.08(0.20)								
B-046-12-N	B-046-13-N	6.35(0.25)								
B-046-15-N		2.54(0.10)	4.4 (0.175)	2.8 (0.110)	1.6 (0.060)	30 (1.180)	14 (0.550)	1.7(0.065) to 4.4(0.175)	1.5(0.060) to 2.8(0.110)	0.3 (0.012)
B-046-66-N	B-046-68-N	5.08(0.20)								
B-046-16-N	B-046-18-N	6.35(0.25)								


MATERIALS

- INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked modified polyvinylidene fluoride.
- SOLDER PREFORM WITH FLUX:
SOLDER: TYPE Sn63 per ANSI-J-STD-006.
FLUX: TYPE ROL0 per ANSI-J-STD-004.
- MELTABLE RING: Thermally stabilized thermoplastic. Color: clear.
- TERMINATION PIN: C51900 per ASTM B103. Plating: Tin-Lead Solder per SAE AMS-P-81728 55%Sn min.


APPLICATION

- These controlled soldering devices are designed for termination of coaxial cables to printed circuit boards. They will terminate the tin plated or silver plated copper center conductor and braid of a coaxial cable having an insulation rated for at least 125°C. The lead may need to be aligned prior to insertion into the board.
- Temperature range: -55°C to +150°C.
For installation, see RPIP-500-03.

For best results, prepare the cable as shown:

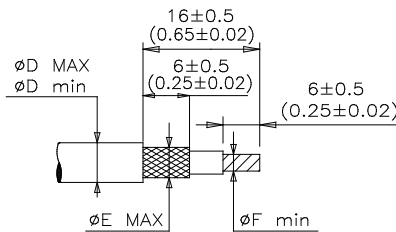

TE Connectivity, TE connectivity (logo), and Raychem are trademarks

		Raychem Products		TITLE: COAXIAL PINPAK					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE BETWEEN BRACKETS.				DOCUMENT NO.: B-046-XX-N					
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A		ANGLES: N/A ROUGHNESS IN MICRON		TE Connectivity reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		Revision: 8		Issue Date: March 2020	
DRAWN BY: M. FORONDA		DATE: 15-Apr-11		ECO: ECO-20-003566		DCR NUMBER: D010002		SCALE: None	
						SIZE: A		SHEET: 1 of 1	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Solder & Shield Tubing](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[CTC-0062-20-9/5-9](#) [CTC-0062-22-9/5-9](#) [650076N001](#) [680441-000](#) [D-150-0331CS2902](#) [D-181-1222-90/9CS2800](#) [D-300-01CS1108](#) [982127-1](#) [D-436-0127CS391](#) [D-436-0182CS246](#) [D-436-37CS2651](#) [D-436-58CS246](#) [D-436-61CS246](#) [D-436-82-CS2621](#) [D-659-0087](#) [D-750-0005CS2493](#) [E53797N001](#) [S200-2-01](#) [S200-4-00CS2904](#) [LSS-81-16AA-CS5575](#) [SO63-2-9036-22CS2677](#) [SO63-3-01CS293](#) [SO63-3-9036-20CS2677](#) [SO63-3-9036-22CS2677](#) [SO63-4-9036-20CS2677](#) [SO63-5-9036-22CS2677](#) [CC1525-000](#) [CTA-0025](#) [CTA-0025CS072](#) [D-108-01CS227](#) [D-108-07CS436](#) [D-128-0010](#) [D-141-0108CS404](#) [D-142-51-202-7754](#) [D-144-41CS1371](#) [D-150-0231-NRCS2896](#) [B-801-18-01](#) [B-801-58](#) [515-9](#) [C67137-000](#) [D-436-36CS2908](#) [D-436-37CS2908](#) [D-436-52CS246](#) [D-436-83CS2705](#) [D-438-0102](#) [LSS-26-8A](#) [427243-000](#) [D-106-2012](#) [D-300-08CS1108](#) [UWCS-2U/7.6-1C/5.8](#)