


CUSTOMER DRAWING

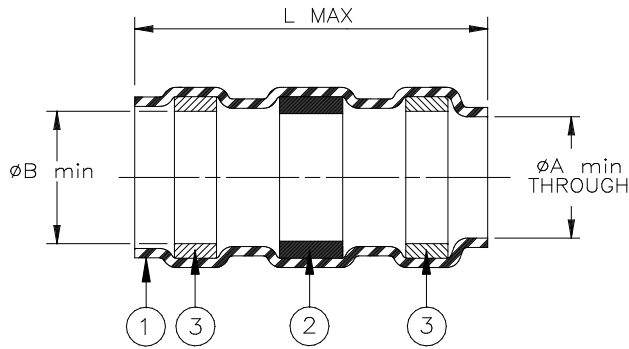

Product Name	Product Dimensions			Cable Dimensions					
	øA min	øB min	L max	D max	øE min	øF min	øG max	H±0.5 (H±0.020)	J±0.5 (J±0.020)
B-150-03	2.5 (0.098)	3.0 (0.118)	24.5 (0.964)	3.0 (0.118)	1.5 (0.059)	1.0 (0.039)	2.5 (0.098)	6.0 (0.236)	7.0 (0.275)
B-150-05	4.3 (0.169)	4.8 (0.189)	29.3 (1.153)	4.8 (0.189)	2.0 (0.078)	1.5 (0.059)	4.3 (0.169)	8.0 (0.315)	9.0 (0.354)
B-150-07	6.8 (0.267)	7.3 (0.287)	32.5 (1.279)	7.3 (0.287)	3.3 (0.130)	2.8 (0.110)	6.8 (0.267)	10.0 (0.393)	11.0 (0.433)
B-150-11	10.8 (0.425)	11.5 (0.452)	35.5 (1.397)	11.5 (0.452)	4.5 (0.177)	4.0 (0.157)	10.8 (0.425)	12.0 (0.472)	13.0 (0.512)
B-150-13	13.0 (0.512)	15.1 (0.594)	45.5 (1.79)	15.1 (0.594)	7.0 (0.275)	6.5 (0.256)	13.0 (0.512)	16.0 (0.630)	17.0 (0.669)
B-150-17	17.0 (0.669)	19.0 (0.748)	55.5 (2.165)	18.0 (0.748)	9.0 (0.354)	8.0 (0.315)	16.0 (0.630)	21.0 (0.827)	23.0 (0.905)
B-150-23	22.5 (0.885)	24.5 (0.964)	80.0 (3.149)	23.5 (0.925)	12.0 (0.472)	11.0 (0.433)	21.5 (0.846)	29.0 (1.142)	31.0 (1.220)
B-150-33	33.0 (1.299)	35.0 (1.380)	80.0 (3.149)	34.0 (1.338)	19.0 (0.748)	17.0 (0.689)	32.0 (1.259)	29.0 (1.142)	31.0 (1.220)


MATERIALS

- INSULATION SLEEVE: Heat-shrinkable, transparent clear, radiation cross-linked modified polyolefin.
- SOLDER PREFORM WITH FLUX.
SOLDER: TYPE Cd18 per ANSI-J-STD-006.
FLUX: TYPE ROM1 per ANSI-J-STD-004.
- MELTABLE SEALING RINGS: Thermally stabilized thermoplastic.

APPLICATION

- These controlled soldering devices are designed for termination of a bare or tin plated copper shield on a cable having an insulation rated for at least +85°C.
- Temperature range: -55°C to +125°C.
For installation procedure and application equipment, consult RPIP-688-00.

For best results, prepare the cable as shown:

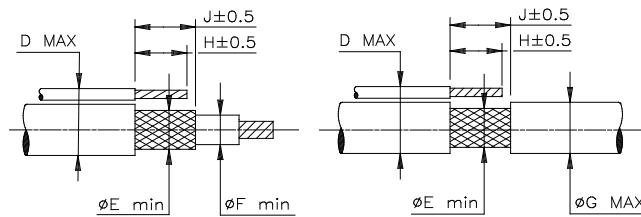

TE Connectivity, TE connectivity (logo), Raychem, Thermofit, and SolderSleeve are trademarks

		Raychem THERMOFIT DEVICES		TITLE: SOLDERSLEEVE DEVICE LOW-FIRE-HAZARD SHIELD TERMINATION LOW TEMPERATURE	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE BETWEEN BRACKETS.				DOCUMENT NO : B-150-XX	
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	TE Connectivity reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		Revision: 4	Issue Date: April 2020
DRAWN BY: M. FORONDA	DATE: 06/29/98	ECO: ECO-20-004959	SCALE: None	SIZE: A	SHEET: 1 of 1

Print Date: 21-Apr-20 If this document is printed it becomes uncontrolled. Check for the latest revision.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[D38999/24FJ4AN](#) [570416-000](#) [CLTEQ-M81CE-SSRELAY-4-20V](#) [4-1195131-0](#) [650069-000](#) [SMD100-2](#) [358838-000](#) [CB-1022B-78](#)
[RM707012](#) [RP410012](#) [MMS42](#) [1-640426-8](#) [2EDL4CM](#) [DTS20W19-11PD-3028-LC](#) [RM202615](#) [NC6-P104-06](#) [MSPS103B](#) [DTS26F21-](#)
[41HE-LC](#) [DTS26F21-41AE](#) [DTS26F21-41PE-LC](#) [DTS26F21-11SE-3028-LC](#) [30DCB6](#) [1932144-1](#) [293545-4](#) [LVR125S](#) [MS27466T25F4PB](#)
[CKB-38-78010](#) [TR04AI-TINELLOCKRING](#) [1206SFF150F/63-2](#) [D38999/20JB35HA](#) [TE1500A2R2J](#) [D38999/20WC8BB](#) [DTS24F19-11SC-](#)
[3028-LC](#) [D38999/24WG11HA](#) [D38999/24WG11HN](#) [MS27467T21F11H](#) [DJT16E21-11HA](#) [MS27467T21F35J](#) [MS27467T21F11J](#)
[MS27467T21F16H-LC](#) [MS27467T21F35H](#) [MS27467T21F41H-LC](#) [1206SFH150F/24-2](#) [RP330024](#) [DJT16E21-11PA-LC](#) [DJT16E21-11HA-](#)
[LC](#) [DJT16E21-11AA](#) [MS27467T21B11JA](#) [DJT16E21-11JA](#) [MS27467T21B11JA-LC](#)