


CUSTOMER DRAWING

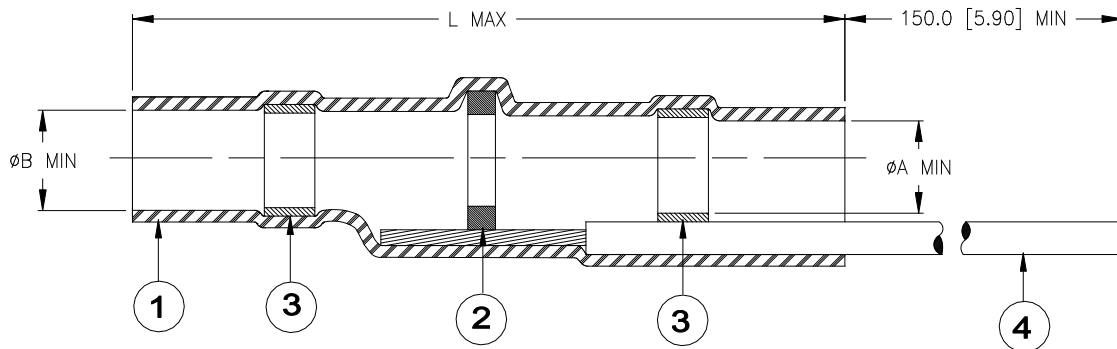

Part Name	Component Dimensions			Cable Dimensions					Qty: Item 2
	øA min	øB min	L max	øD max	øE min	øF min	øG max	J±0.5 [J±0.020]	
B-155-05-100-18-9	4.3 [0.169]	4.8 [0.189]	29.3 [1.154]	4.8 [0.189]	2.0 [0.079]	1.5 [0.059]	4.3 [0.169]	9.0 [0.354]	1
B-155-07-100-18-9	6.4 [0.250]	7.3 [0.290]	32.5 [1.280]	7.3 [0.290]	3.3 [0.130]	2.8 [0.110]	6.4 [0.250]	11.0 [0.435]	1
B-155-11-100-18-9	10.0 [0.395]	11.5 [0.450]	35.5 [1.395]	11.5 [0.450]	4.5 [0.175]	4.0 [0.155]	10.0 [0.395]	13.0 [0.510]	2
B-155-13-100-18-9	13.0 [0.510]	15.1 [0.595]	45.5 [1.790]	15.1 [0.595]	7.0 [0.275]	6.5 [0.255]	13.0 [0.510]	17.0 [0.670]	3
B-155-17-100-18-9	16.5 [0.650]	19.0 [0.750]	55.0 [2.165]	18.0 [0.710]	9.0 [0.355]	8.0 [0.315]	16.0 [0.630]	23.0 [0.905]	2


MATERIALS

- INSULATION SLEEVE: Heat-shrinkable, transparent clear, radiation cross-linked modified polyolefin.
- SOLDER PREFORM WITH FLUX Qty: see table (one solder washer shown).
 SOLDER: TYPE Sn42Bi58 per ANSI / J-STD-006.
 FLUX: TYPE ROM1 per ANSI / J-STD-004.
- MELTABLE SEALING RINGS: Thermally stabilized thermoplastic.
- GROUND LEAD: Tyco Electronics / Raychem Zerohal 100G0111-18-9 (AWG18), stranded tin-plated copper. Color: white.


APPLICATION

- These controlled soldering devices are designed for termination of a bare or tin-plated copper shield on a cable having an insulation rated for at least +85°C, and meeting the dimensional criteria listed in the table above.
- Temperature range: -55°C to +125°C.
- When installed properly, it will meet the performance requirements of Tyco Electronics / Raychem Specification RT-1404.
- For installation procedure and application equipment, consult RPIP-688-01.

For best results, prepare the cable as shown:

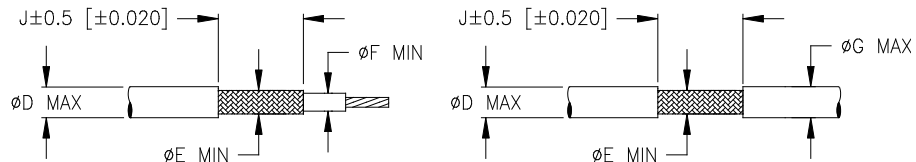

TE Connectivity, TE connectivity (logo), Raychem, and SolderSleeve are trademarks

		Raychem		TITLE: SOLDERSLEEVE SHIELD TERMINATOR, LEAD-FREE LOW-FIRE-HAZARD WITH PRE-INSTALLED LEAD					
Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets]				DOCUMENT NO.:					
				B-155-XX-100-18-9					
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A		ANGLES: N/A		TE Connectivity reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		Revision: 2		Issue Date : April 2020	
PREPARED BY: mforonda		CAGE CODE : 06090		DATE: 30-Jun-05		ECO: ECO-20-005386		SCALE: ---	
						SIZE: A		SHEET: 1 of 1	

Print Date: 17-Apr-20

© 2020 Tyco Electronics Corporation. All rights reserved.

If this document is printed it becomes uncontrolled. Check for the latest revision.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Solder Sleeves & Shield Tubing](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[899170-000](#) [620040N001](#) [620069N003](#) [CTA-0050-01](#) [629624-000](#) [6500750004](#) [6501390002](#) [CX0781-000](#) [696396-000](#) [697080-000](#) [D-150-0331CS2902](#) [D-181-1222-90/9CS2800](#) [D-300-01CS1108](#) [715325N001](#) [908357N001](#) [982127-1](#) [D-436-0182CS246](#) [D-436-37CS2651](#) [D-436-61CS246](#) [D-436-82-CS2621](#) [D-659-0087](#) [E53797N001](#) [CB0213-000](#) [CB0219-000](#) [S200-2-01](#) [S200-4-00CS2904](#) [LSS-81-16AA-CS5575](#) [ST18-2-00](#) [FLX40-020-04-CS8651](#) [325534-000](#) [CTA-0025](#) [D-108-07CS436](#) [D-128-0010](#) [D-141-0108CS404](#) [D-144-41CS1371](#) [D-150-0231-NRCS2896](#) [D-150-1011](#) [395947-000](#) [427243N001](#) [B-801-18-01](#) [515-9](#) [C67137-000](#) [CB0220-000](#) [D-436-0185CS1102](#) [D-436-36CS2908](#) [D-436-37CS2908](#) [D-436-52CS246](#) [D-436-83CS2705](#) [D44133N001](#) [LSS-26-8A](#)