


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

| LOC |    | DIST |     | REVISIONS       |         |     |      |
|-----|----|------|-----|-----------------|---------|-----|------|
| AD  | 00 | P    | LTR | DESCRIPTION     | DATE    | DWN | APVD |
|     |    | 0    |     | EC 0G3C-0114-04 | 23APR04 | BSV | MZ   |


### SPECIFICATIONS:

PLASTIC MATERIAL: PPO GLASS FILLED  
 (SELF EXTINGUISHING, NON-DRIP GROUP 1)  
 CONTACT MATERIAL: SOLDER TAGS AND SOLDER LUGS  
 Au OVER Ni ON Sn-Bz  
 CONTACT SPACING: 5,9 AND 12 POLES=.100(2.54)  
 11 POLES=.079(2.00)  
 CONTACT LOAD: 1A  
 OPERATING VOLTAGE: 40V  
 CONTACT RESISTANCE: <15mOhm  
 INSULATION RESISTANCE: >10 Ohm  
 TEST VOLTAGE: 500VAC<sup>12</sup>  
 PERMISSIBLE AMBIENT TEMPERATURE: -40° TO +100°  
 INSERTION FORCE PER CONTACT: APPROX. 2N  
 WITHDRAWAL FORCE PER CONTACT: APPROX. 1.8N  
 PLUGGING FREQUENCY: AFTER 100 PLUGGING ACTIONS  
 TECHNICAL VALUES ARE ALL WITHIN LIMITS.

NOTES: B9LS/5-PIN TERMINALS ARE LOCATED IN  
 ODD NUMBERED POSITIONS ONLY (1,3,5,7,9)  
 WITH .200 SPACE CENTER TO CENTER.  
 (5.08)

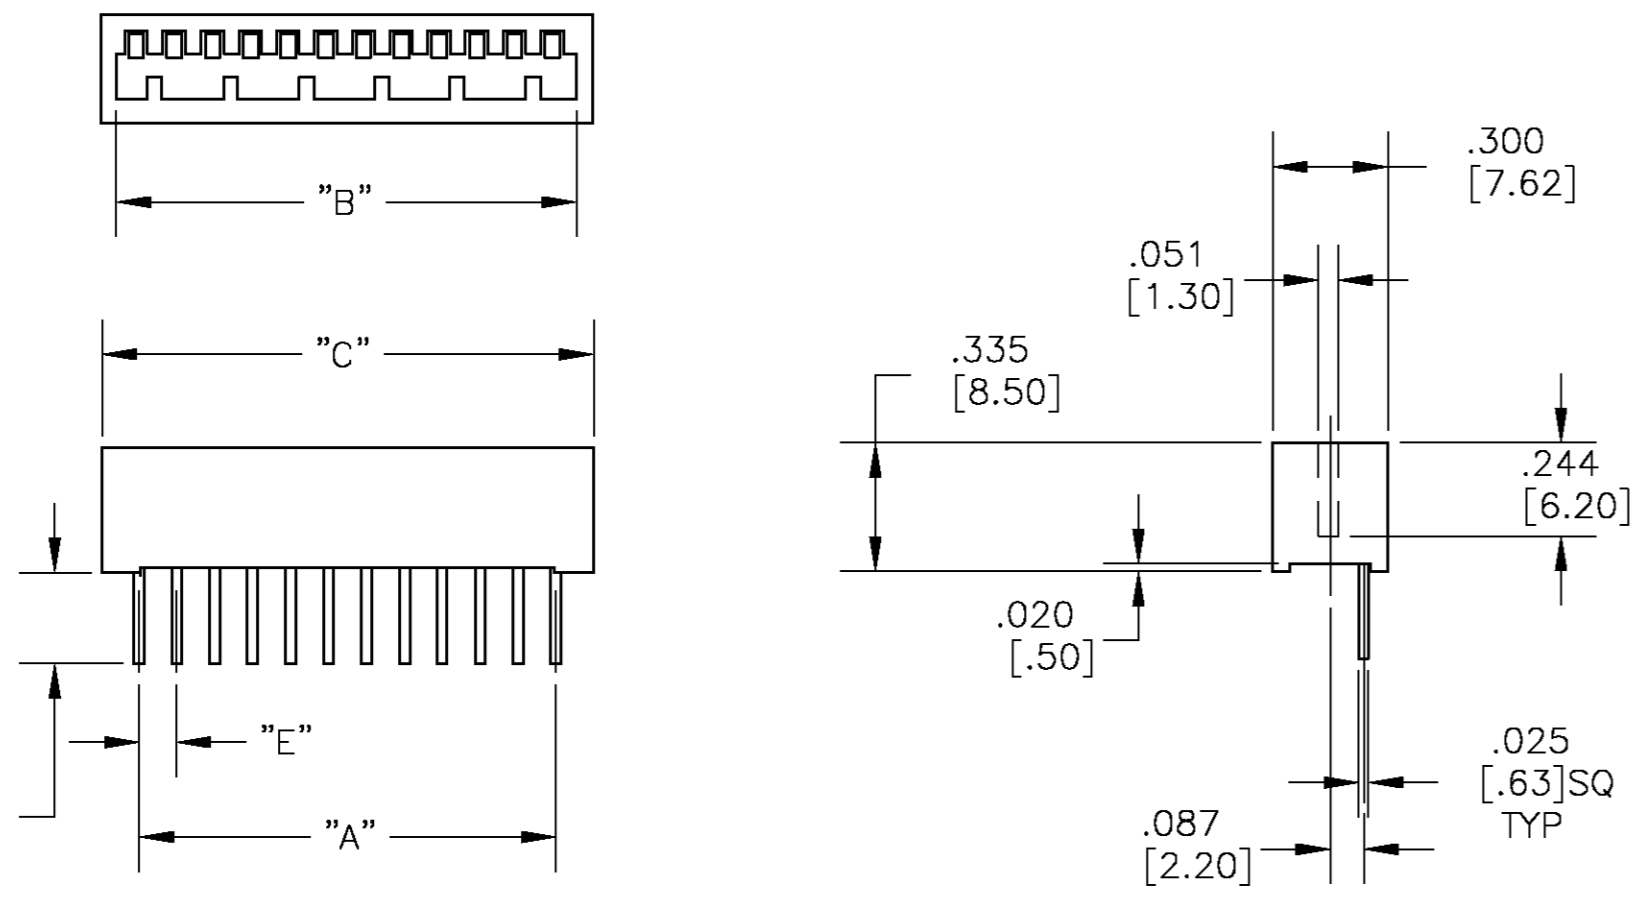

LS TERMINAL TYPE

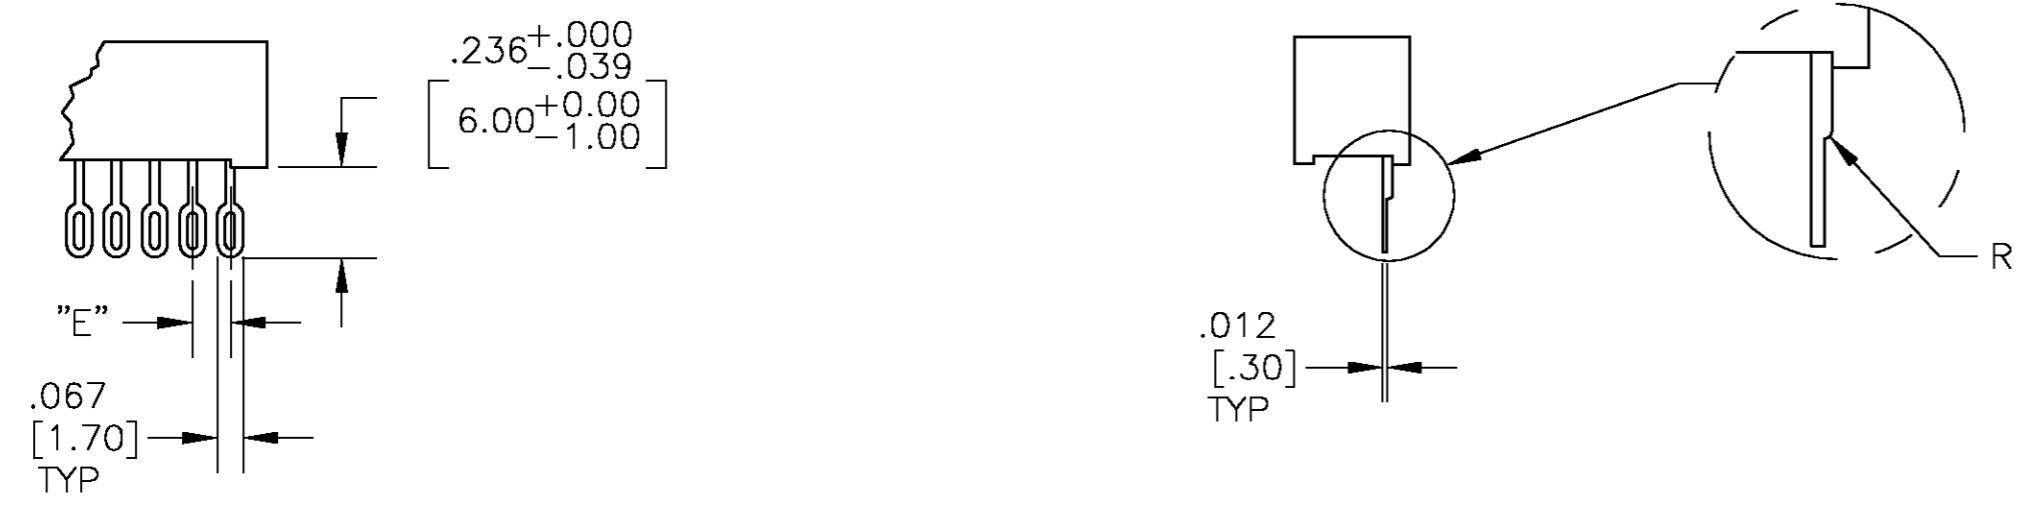

L TERMINAL TYPE

| PART NUMBER | MODEL No.      | No. OF POLES | DIM "A"       | DIM "B"      | DIM "C"       | DIM "E"     |
|-------------|----------------|--------------|---------------|--------------|---------------|-------------|
| 1437606-3   | B12LS          | 12           | 1.100 (27.94) | 1.201 (30.5) | 1.299 (33.00) | .100 (2.54) |
| 1437606-2   | B12L           | 12           | 1.100 (27.94) | 1.201 (30.5) | 1.299 (33.00) | .100 (2.54) |
| 1437606-1   | B11LS          | 11           | .787 (20.0)   | .874 (22.20) | .945 (24.00)  | .079 (2.00) |
| 1437606-9   | B9LS/<br>5 PIN | (SEE NOTE)   | .800 (20.32)  | .874 (22.20) | .940 (24.00)  | .200 (5.08) |
| 1437606-8   | B9LS           | 9            | .800 (20.32)  | .874 (22.20) | .945 (24.00)  | .100 (2.54) |
| 1437606-6   | B9L            | 9            | .800 (20.32)  | .874 (22.20) | .945 (24.00)  | .100 (2.54) |
| 1437606-5   | B5LS           | 5            | .400 (10.16)  | .559 (14.20) | .598 (15.20)  | .100 (2.54) |
| 1437606-4   | B5L            | 5            | .400 (10.16)  | .559 (14.20) | .598 (15.20)  | .100 (2.54) |

|   |  |                      |   |                 |
|---|--|----------------------|---|-----------------|
| THIS DRAWING IS A CONTROLLED DOCUMENT.  |  | DWN BSV 23APR04      | Tyco Electronics Corporation<br>Harrisburg, Pa 17105-3808 |                 |
| DIMENSIONS: INCHES  |  | CHK M ZITTO 27APR04  |   |                 |
| TOLERANCES UNLESS OTHERWISE SPECIFIED:  |  | APVD M ZITTO 27APR04 | NAME CONNECTORS B SERIES                                  |                 |
| 0 PLC ± -<br>1 PLC ± -<br>2 PLC ± -<br>3 PLC ± .010<br>4 PLC ± -<br>ANGLES ± 1° |  | PRODUCT SPEC         | RESTRICTED TO   |                 |
| MATERIAL  |  | APPLICATION SPEC     | SIZE A2   | CAGE CODE 00779 |
| FINISH  |  | WEIGHT               | DRAWING NO. 1437606-2                                     |                 |
|   |  | CUSTOMER DRAWING     | SCALE 2:1   | SHEET 1 OF 1    |

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Thumbwheel Switches & Pushwheel Switches](#) category:*

*Click to view products by [TE Connectivity](#) manufacturer:*

Other Similar products are found below :

[PICOD131ALULS2](#) [A7SS-107-PM](#) [DGAN-031-B](#) [1437603-2](#) [DPS10131AL2](#) [DPS10301AK](#) [DPS8111AK](#) [DPS8137AK2](#) [1437603-7](#) [A7M-1P](#) [B5LS](#) [B5LS](#) [3-1437603-8](#) [DGBN-036-B](#) [DPS10131AK](#) [DPS910A2](#) [1-1437602-8](#) [SH6G137AKLS2](#) [DPS9L2](#) [1-1437603-1](#) [SMCL2](#) [SMCD137AK](#) [SP1.5](#) [DPS8111AK2](#) [TW01RED14](#) [TW01BLK14](#) [84212014](#) [84212013](#) [HTWF-1A12A21](#) [301419100](#) [302109002](#) [302329N00](#) [311100001](#) [312100100](#) [312300000](#) [332300003](#) [337100000](#) [342300001](#) [311100000](#) [312100000](#) [313100000](#) [313110003](#) [321400100](#) [322300000](#) [323100000](#) [332100100](#) [333100110](#) [347100000](#) [301119000](#) [303109101](#)