


SPECIFICATION CONTROL DRAWING

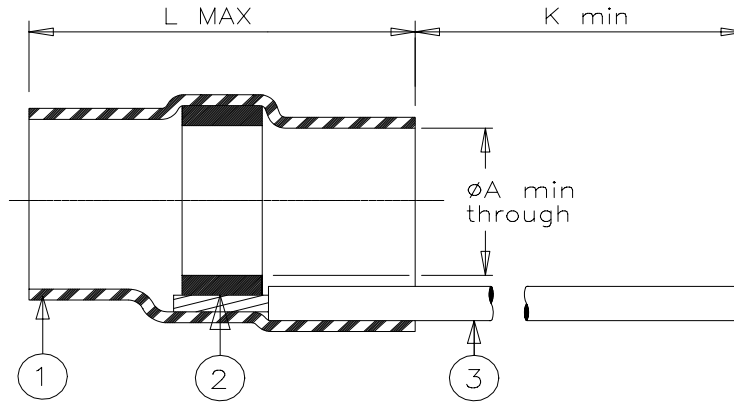


Product Revision		Product Dimensions			Cable Dimensions	
Product Name		L max	A min	K min	F max	C nom
B-801-68-05-02	A	7.1 (0.280)	1.4 (0.055)	70 (2.760)	1.2 (0.050)	4.5 (0.180)

MATERIAL

- INSULATION SLEEVE: Heat-shrinkable, radiation cross-linked modified polyvinylidene fluoride. Transparent blue.
- SOLDER PREFORM WITH FLUX:
SOLDER: TYPE Sn96 per ANSI J-STD-006.
FLUX: TYPE ROM1 per ANSI J-STD-004.
- CONDUCTOR LEAD: RAYCHEM 55A0111-28 in accordance with MIL-W-22759/32 AWG28 stranded tin plated copper wire. Color: blue.

APPLICATION

- These parts are designed to provide an environment protection shield termination on cables, rated for 150°C minimum, meeting the dimensional criteria listed and having nickel coated pins.
- Temperature range: -55°C to +175°C.
- Install using Raychem approved convection or infrared tools in accordance with Raychem installation procedure RCPS-200-12.

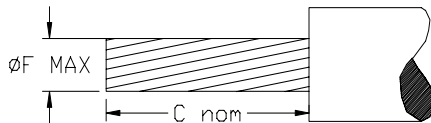

*A trademark of Raychem Corporation.

Raychem		THERMOFIT DEVICES	Raychem Corporation 300 Constitution Drive Menlo Park, CA 94025 USA	SOLDERSLEEVE* DEVICE WITH PRE-INSTALLED LEAD HIGH TEMPERATURE			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE BETWEEN BRACKETS.				DOCUMENT NO: B-801-68-05-02			
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A	ROUGHNESS IN MICRON	Raychem reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.	DCR NUMBER: D980555	REPLACES: 80168052		
DRAWN BY: R. MAPALO	DATE: 07/06/98	REV.: SEE TABLE	DOC ISSUE: 3	SCALE: NONE	SIZE: A	SHEET: 1 of 1	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Solder Sleeves & Shield Tubing](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[899170-000](#) [620040N001](#) [620069N003](#) [CTA-0050-01](#) [629624-000](#) [6500750004](#) [6501390002](#) [CX0781-000](#) [696396-000](#) [697080-000](#) [D-150-0331CS2902](#) [D-181-1222-90/9CS2800](#) [D-300-01CS1108](#) [715325N001](#) [908357N001](#) [982127-1](#) [D-436-0182CS246](#) [D-436-37CS2651](#) [D-436-61CS246](#) [D-436-82-CS2621](#) [D-659-0087](#) [E53797N001](#) [CB0213-000](#) [CB0219-000](#) [S200-2-01](#) [S200-4-00CS2904](#) [LSS-81-16AA-CS5575](#) [ST18-2-00](#) [FLX40-020-04-CS8651](#) [325534-000](#) [CTA-0025](#) [D-108-07CS436](#) [D-128-0010](#) [D-141-0108CS404](#) [D-144-41CS1371](#) [D-150-0231-NRCS2896](#) [D-150-1011](#) [395947-000](#) [427243N001](#) [B-801-18-01](#) [515-9](#) [C67137-000](#) [CB0220-000](#) [D-436-0185CS1102](#) [D-436-36CS2908](#) [D-436-37CS2908](#) [D-436-52CS246](#) [D-436-83CS2705](#) [D44133N001](#) [LSS-26-8A](#)