


Type CB10 Series

Key Features

- Low Cost
- Robust Enclosed Construction
- Spindle Adjust Versions
- Flame Retardant
- Arrow Position Indicator
- Top, Bottom and Side Adjust Styles
- Stable in High Humidity
- Edgewise Operation Style

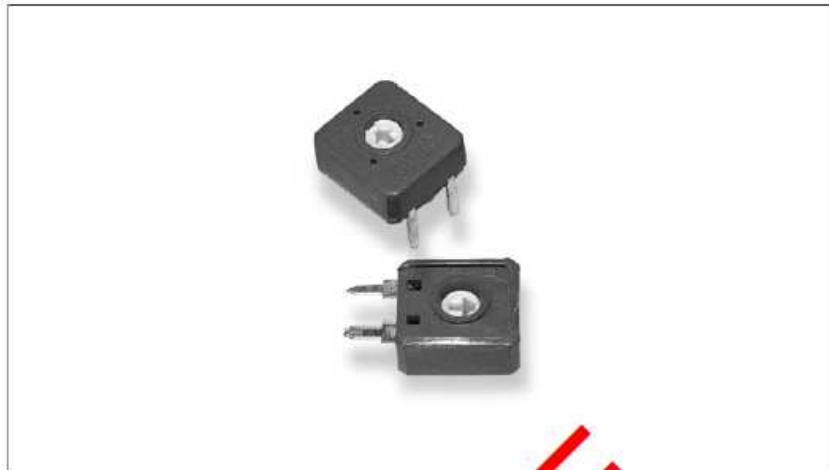

Low price, versatility and stable environmental characteristics are important benefits of this product. Featuring an innovative carbon resistive element mounted on film in a fully enclosed package, this potentiometer style is normally chosen for a wide range of applications in industrial, professional and consumer equipment.

Characteristics - Electrical

| | |
|--------------------------|---|
| Resistance Range: | 100R to 10M Linear, 1K to 1M Non-Linear |
| Resistance Values: | 1, 2.2 & 4.7 in each decade |
| Resistance Tolerance: | ± 20% (± 30% above 1 Megohms) |
| End Resistance: | < 3% |
| Power Rating @ 40°C: | 0.15 Watts (derating to zero at 70°C) |
| Maximum Voltage: | Lin. 200V DC / Log. 150V DC |
| Rotational Noise (dRV): | < 5% of Rn nominal |
| Temperature Coefficient: | ± 500 ppm/°C (< 100K ohms) |
| Slider Current: | 50mA |
| Resolution: | Essentially Infinite |
| Electrical Adjustment: | 240° Nominal 1 Turn |

Characteristics - Mechanical

| | |
|------------------------|----------------|
| End Torque: | 50 mNm maximum |
| Starting Torque: | 4 to 20 mNm |
| Mechanical Adjustment: | 295° nominal |
| Weight: | 0.8 grams |

Characteristics - Environmental

| | |
|----------------------|--|
| Temperature Range: | -25°C to +70°C |
| Temperature Storage: | 1000 hours at 100°C |
| Rotational Life: | 500 cycles, minimum (10000 cycles-extended life versions) |
| Load Life at 40°C: | ΔR < 10% after 1000 hours |
| Sealing: | Dust proof IP level 5 |
| Climate Category: | 25/70/21 |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Potentiometer Tools & Fixings](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[7071](#) [7071E](#) [7072E](#) [FKS-1/4](#) [H-38-3](#) [1220A](#) [ACCPOTDBB173190100](#) [H-858](#) [H-137-000](#) [H-37-5](#) [H-38-1](#) [7090E](#) [7074E](#) [RK14K1240A4S](#)
[HARDWARE](#) [H-862](#) [100P8](#) [H-80-1](#) [RKZ00020NA](#) [34-1032-1A](#) [006-1-0](#) [1-150](#) [T4845 09](#) [T4845 26](#) [H-38-2](#) [H-37-1](#) [DA-01](#) [P0700-21](#)
[P0700-7](#) [DA-02](#) [008T000](#) [T4845 13](#) [T4845 18](#) [T4857](#) [GSD-675](#) [H-114P](#) [H-83P](#) [H-90](#) [H-91](#) [DA-83](#) [6533E](#) [6591E](#) [7070E](#) [7091E](#) [5465](#)
[RKZ00023UA](#) [ZB4BD912](#) [T4844](#) [T4847](#) [T4847 0](#) [T4856](#)