
THIS DRAWING AND THE INFORMATION SET FORTH HEREON ARE TH PROPERTY OF TYCO ELECTRONICS CORPORATION AND ARE TO BE HELD IN TRUST AND CONFIDENCE. PUBLICATION, DUPLICATION, DISCLOSURE OR USE FOR ANY PURPOSE NOT EXPRESSLY AUTHORIZED IN WRITING BY TYCO ELECTRONICS CORPORATION IS

| REVISION | | | | |
|----------|---------------------------------|---------|--|--|
| REV | DESCRIPTION | DATE | | |
| F | REVISED PER DCR NUMBER MP060008 | 4/17/06 | | |

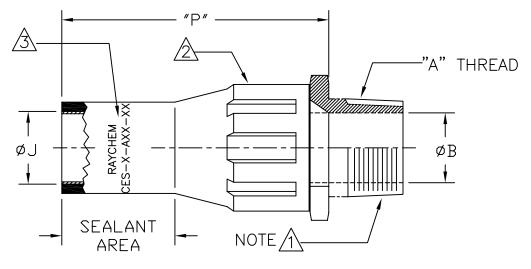

| PART | DART A ØJ | | SJ. | ØΒ | Р |
|---------------|-------------------------|-----------------|----------------|-----------------|-----------------|
| NUMBER | NATIONAL PIPE THREAD | EXP MIN | REC MAX | ±.02 | REC REF |
| CES-1-A50-XX | 1/2-14 | .50 [12,70] | .17 [4,31] | .50 [12,7] | 2.45 [62,23] |
| CES-2-A50-XX | 1/2-14 | .75 [19,05] | .25 [6,35] | .50 [12,7] | 2.45 [62,23] |
| CES-2-A75-XX | 3/4-14 | .75 [19,05] | .25 [6,35] | .75 [19,05] | 2.45 [62,23] |
| CES-2-A100-XX | 1-11 1/2 | .75 [19,05] | .25 [6,35] | .75 [19,05] | 2.45 [62,23] |
| CES-3-A100-XX | 1-11 1/2 | 1.20 [30,48] | .50 [12,70] | 1.01 [25,66] | 3.55 [90,17] |
| CES-3-A150-XX | 1 1/2-11 1/2 | 1.20 [30,48] | .50 [12,70] | 1.10 [27,94] | 3.55 [90,17] |
| CES-4-A150-XX | 1 1/2-11 1/2 | 1.60 [40,64] | .75 [14,28] | 1.48 [37,59 | 3.85 [97,79] |

NOTES:

/1\ THE LAST "XX" IN THE PART NUMBER DESIGNATES MATERIAL AS SHOWN BELOW: "AL": ALUMINUM 6061 T-6 WITH FINISH OF HARD ANODIZE PER MIL-A-8625, TYPE III, CLASS 2, DYED BLACK.

"SS": STAINLESS STEEL TYPE 316, WITH FINISH OF PASSIVATE PER QQ-P-35, OR MIL-S-5002 FOR STANDARD BLACK NYLON MATERIAL, DMIT THE LAST "X" IN THE PART NUMBER.

/2\ HEAT SHRINKABLE BOOT MATERIAL IN ACCORDANCE WITH -3 POLYOLEFIN

/3\ PART IS TO BE MARKED AS SHOWN, REPLACE X'S WITH APPROPRIATE CHARACTERS. THE FIRST "X" IN THE PART NUMBER IS SUBSTITUTED BY THE SIZE 1-5, THE SECOND SET OF "X's" REFERS TO NPT SIZE.

4. FACTORY APPLIED HOT MELT ADHESIVE IS STANDARD.

| | SPECIFICATION CONTROL DRAWING | | | | | | | |
|---|--|---|---------------|---------|--|--|--|--|
| | 300 Co | ectronics Corporation nstitution Drive ark, CA. USA 94025 | Product Brand | Raychem | | | | |
| CABLE ENTRY SEAL, SIZE 1-4 SINGLE ENTRY, NPT THREADED | | | | | | | | |
| | © 2006 Tyco Electronics Corparation. All rights reserved | | | | | | | |
| SIZE | CODE IDENT, NO. | DVG. ND. | | | | | | |
| A | 06090 | CES-X-AXXX-XX | | | | | | |
| DO NOT SCALE THIS DRAWING SHEET 1 OF 1 | | | | | | | | |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Heat Shrink Cable Boots & End Caps category:

Click to view products by TE Connectivity manufacturer:

Other Similar products are found below:

577159N001 645494-000 CX4132-000 687025-000 705331-000 718446-000 725666N001 729257-000 F27131-000 F85868-000 770003S106W2 770-013210W1 770-013311 770-013312 806542N001 807507-000 808059-000 808362-000 808618-000 809125-000 809130000 809218-000 812014-000 812047-000 813166-000 813767N002 814741-000 819117N001 823026-000 823070-000 825002-000
841189N001 861471-000 866647-000 879515-000 937577-000 957073-000 982033-2 A77813-000 R280576000 D96192-000 163549-000
MTPSRBCL-C 1954015-1 200W531-3-0 202A163-4-0-CS5067 202A343-3-00-0 202B221-13-0 202B231-13-0 202B563-25-07-0