


### Type CJT Series

#### Key Features

- Modular versions available
- Environmental protection to IP54
- Up to 2000W power rating
- Aluminium enclosure
- Vibration resistant

#### Applications

- Power supplies
- Inverters
- Servo systems
- Electrical systems in difficult environments

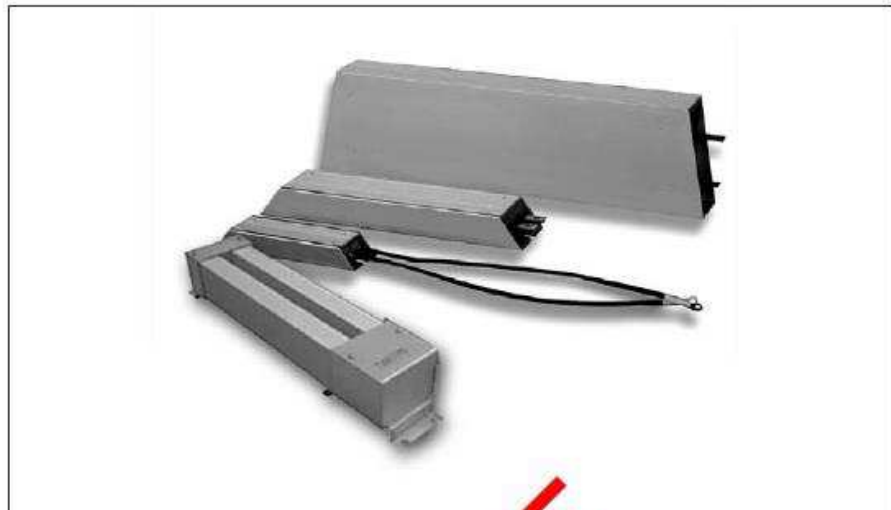

TE Connectivity (TE) is a leading supplier of standard and custom-designed power resistors for industrial, control and general-purpose applications. The CJT Series of resistors are advantageous to conventional ceramic resistors in the terms of weather proofing, oscillation-resistance and safety. They are widely applied to a range of electrical circuits including power supplies, inverters and servo systems. With easy airtight fitting and the ability to fit a heatsink the resistor is highly suited to challenging environmental conditions.


#### Characteristics - Electrical

| Type  | CJT60                 | CJT80 | CJT100 | CJT120 | CJT150 | CJT200 | CJT300 |
|---|-----------------------|-------|--------|--------|--------|--------|--------|
| Rated Power in Free Air (W)                     | 60                    | 80    | 100    | 120    | 150    | 200    | 300    |
| Ohmic Value - Min                               | 1R0                   |       |        |        |        |        |        |
| Ohmic Value Max                                 | 2K7                   |       |        |        |        |        |        |
| Tolerance                                       | 5%                    |       |        |        |        |        |        |
| Temp. Coefficient of Resistance                 | 440ppm                |       |        |        |        |        |        |
| Resistor Element Max Working Voltage            | 1kV                   |       |        |        |        |        |        |
| Dielectric Voltage                              | AC2.5kV/1min 50Hz     |       |        |        |        |        |        |
| Insulation Resistance (Megohm)                  | R <sub>i</sub> ≥100MΩ |       |        |        |        |        |        |
| Max. Surface Temp. at Rated Power Free Air (°C) | 206°C                 | 221°C | 254°C  | 267°C  | 286°C  | 306°C  | 334°C  |
| Weight  | 150g                  | 185g  | 240g   | 280g   | 300g   | 445g   | 600g   |
| Termination                                     | Lead                  |       |        |        |        |        |        |
| Lead Length                                     | 500mm                 |       |        |        |        |        |        |
| Lead Diameter                                   | 1.5mm                 |       |        |        |        |        |        |
| Terminal Creep Distance                         | n/a                   |       |        |        |        |        |        |


| Type  | CJT400                | CJT500 | CJT800 | CJT1000       | CJT1200 | CJT1500 | CJT2000 |
|---|-----------------------|--------|--------|---------------|---------|---------|---------|
| Rated Power in Free Air (W)                     | 400                   | 500    | 800    | 1000          | 1200    | 1500    | 2000    |
| Ohmic Value - Min                               | 1R0                   |        |        |               |         |         |         |
| Ohmic Value Max                                 | 2K7                   |        |        |               |         |         |         |
| Tolerance                                       | 5%                    |        |        |               |         |         |         |
| Temp. Coefficient of Resistance                 | 440ppm                |        |        |               |         |         |         |
| Resistor Element Max Working Voltage            | 1kV                   |        |        |               |         |         |         |
| Dielectric Voltage                              | AC2.5kV/1min 50Hz     |        |        |               |         |         |         |
| Insulation Resistance (Megohm)                  | R <sub>i</sub> ≥100MΩ |        |        |               |         |         |         |
| Max. Surface Temp. at Rated Power Free Air (°C) | 370°C                 | 358°C  | 311°C  | 372°C         | 406°C   | 419°C   | 453°C   |
| Weight  | 765g                  | 965g   | 1.18kg | 3.46kg        | 3.885kg | 4.31kg  | 4.89kg  |
| Termination                                     | Lead                  |        |        | Lead/Terminal |         |         |         |
| Lead Length                                     | 500mm                 |        |        |               |         |         |         |
| Lead Diameter                                   | 1.5mm                 |        |        | 4mm           |         |         |         |
| Terminal Creep Distance                         | n/a                   |        | 30mm   | 42mm          | 42mm    | 42mm    | 42mm    |

**Type CJT Series**


**Derating Curve**

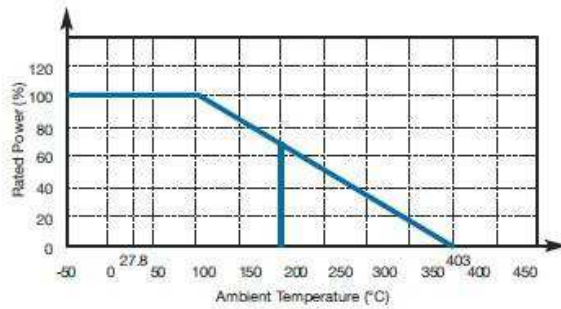

**Temperature Rise**

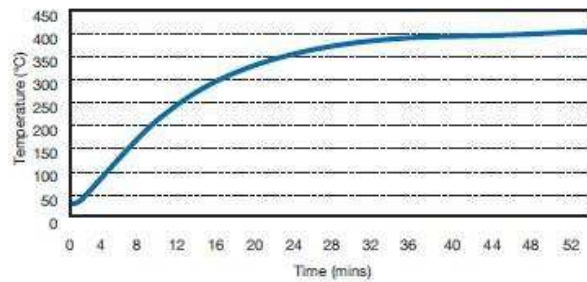


**Dimensions - CJT Series**

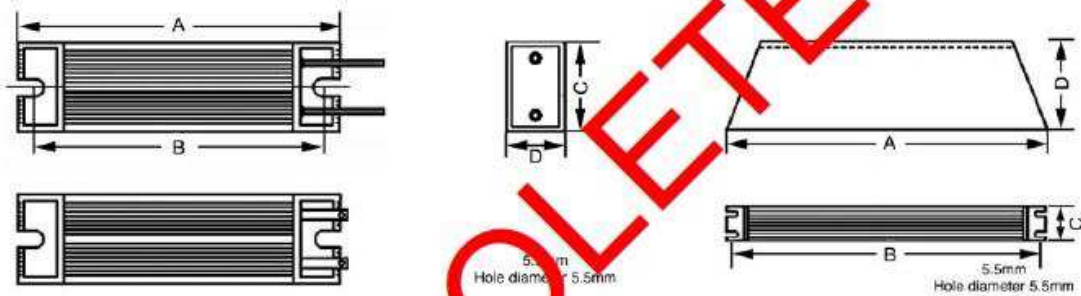

| Rated Power (W) | Dimensions (mm) |    |     |
|-----------------|-----------------|----|-----|
|                 | B               | C  | D   |
| 60              | 115             | 40 | 20  |
| 80              | 120             | 40 | 20  |
| 100             | 125             | 40 | 20  |
| 120             | 130             | 40 | 20  |
| 150             | 135             | 40 | 20  |
| 200             | 145             | 60 | 30  |
| 300             | 165             | 60 | 30  |
| 400             | 185             | 60 | 30  |
| 500             | 205             | 60 | 30  |
| 800             | 305             | 61 | 59  |
| 1000            | 335             | 50 | 107 |
| 1200            | 365             | 50 | 107 |
| 1500            | 405             | 50 | 107 |
| 2000            | 475             | 50 | 107 |

Type CJT Series

Dimensions - CJTM Series

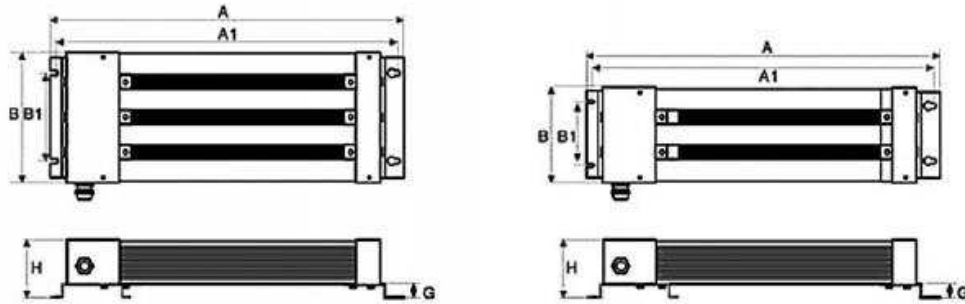

| Type   | Rated Power (W) | Resistance (Ω) |      | Dimensions (mm) |     |     |     |    |    | Connecting Wire (mm <sup>2</sup> ) | Lead Length (mm) |
|--------|-----------------|----------------|------|-----------------|-----|-----|-----|----|----|------------------------------------|------------------|
|        |                 | Min            | Max  | A               | A1  | B   | B1  | G  | H  |                                    |                  |
| CJTM1U | 200             | 1              | 2K7  | 268             | 253 | 64  | 30  | 20 | 84 | 2.5                                | 500              |
| CJTM1U | 300             | 1              | 2K7  | 318             | 303 | 64  | 30  | 20 | 54 | 2.5                                | 500              |
| CJTM1U | 400             | 1              | 2K7  | 368             | 353 | 64  | 30  | 20 | 54 | 2.5                                | 500              |
| CJTM1U | 500             | 1              | 2K7  | 438             | 423 | 64  | 30  | 20 | 54 | 2.5                                | 500              |
| CJTM1U | 600             | 1              | 2K7  | 503             | 488 | 64  | 30  | 20 | 54 | 2.5                                | 500              |
| CJTM2U | 800             | 2              | 5K4  | 372             | 355 | 84  | 49  | 20 | 84 | 2.5                                | 500              |
| CJTM2U | 1000            | 2              | 5K4  | 442             | 425 | 84  | 49  | 20 | 84 | 2.5                                | 500              |
| CJTM2U | 1200            | 2              | 5K4  | 507             | 490 | 84  | 49  | 20 | 84 | 2.5                                | 500              |
| CJTM3U | 1200            | 3              | 8K1  | 372             | 355 | 134 | 75  | 20 | 84 | 2.5                                | 500              |
| CJTM3U | 1500            | 3              | 8K1  | 442             | 425 | 134 | 75  | 20 | 84 | 2.5                                | 500              |
| CJTM3U | 1800            | 3              | 8K1  | 507             | 490 | 134 | 75  | 20 | 84 | 2.5                                | 500              |
| CJTM4U | 1600            | 4              | 10K8 | 372             | 355 | 134 | 125 | 20 | 84 | 2.5                                | 500              |
| CJTM4U | 2000            | 4              | 10K8 | 442             | 425 | 134 | 125 | 20 | 84 | 4                                  | 500              |
| CJTM4U | 2400            | 4              | 10K8 | 507             | 490 | 134 | 125 | 20 | 84 | 4                                  | 500              |
| CJTM5U | 2000            | 5              | 13K5 | 372             | 355 | 234 | 175 | 20 | 84 | 4                                  | 500              |
| CJTM5U | 2500            | 5              | 13K5 | 442             | 425 | 234 | 175 | 20 | 84 | 4                                  | 500              |
| CJTM5U | 3000            | 5              | 13K5 | 507             | 490 | 234 | 175 | 20 | 84 | 4                                  | 500              |

How to Order

**CJT**

|   |   |  |                             |   |
|---|---|--|-----------------------------|---|
| <b>Common Part</b><br>CJT - Single Aluminium Housed Power Resistors | <b>Power Rating</b><br>60 - 60 Watt<br>80 - 80 Watt<br>100 - 100 Watt<br>120 - 120 Watt<br>etc. | <b>Resistance Value</b><br>1 Ohm (1000 Milliohms) 1R0<br>10 Ohms (10 Ohms) 10R<br>100R Ohms (100 Ohms) 100R<br>1k Ohms (1000 Ohms) 1K0 | <b>Tolerance</b><br>J - ±5% | <b>Connection</b><br>M - Terminal<br>J - Lead |
|---|---|--|-----------------------------|---|

**CJTM**

|   |  |  |  |   |
|---|--|--|--|---|
| <b>Common Part</b><br>CJTM - Multi Aluminium Housed Power Resistors | <b>No. of Units</b><br>1U - 1 Unit<br>2U - 2 Units<br>3U - 3 Units<br>4U - 4 Units<br>5U - 5 Units | <b>Power Rating</b><br>200 to 3000 Watts | <b>Resistance Value</b><br>1 Ohm (1000 Milliohms) 1R0<br>10 Ohms (10 Ohms) 10R<br>100R Ohms (100 Ohms) 100R<br>1k Ohms (1000 Ohms) 1K0 | <b>Tolerance</b><br>J - ±5%<br>K - ±10% |
|---|--|--|--|---|

TE Connectivity, TE connectivity (logo) and TE (logo) are trademarks. Other logos, product and Company names mentioned herein may be trademarks of their respective owners.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Wirewound Resistors - Chassis Mount](#) category:*

*Click to view products by [TE Connectivity](#) manufacturer:*

Other Similar products are found below :

[HD300HLR71J](#) [RER50F18R7RC02](#) [RER50F7R50RC02](#) [RER75F4991MC02](#) [RH0055R000FC02W09](#) [2-1623821-6](#) [FVT200-500](#)  
[RDSF010015R00JDBNI](#) [RER60F34R8RC02](#) [RER60F51R1MC0230](#) [RER65F1R50PC02](#) [RER70F62R5PC02](#) [VK100NA-200](#) [VK100NA-50](#)  
[VK100NA-750](#) [40/70MJ2K00BE](#) [VP10FA-3K](#) [VP50KA-20K](#) [VPR10F1](#) [VPR10F-13.5K](#) [VPR10F-4500](#) [VPR10F-4.5K](#) [VPR10F-4K](#)  
[VPR10F-700](#) [VPR10F-7.5K](#) [VPR20H150](#) [VPR5F-22.5K](#) [L75J1K0E](#) [VRH320 3K3 K](#) [RER65F2940PC02](#) [RER75F1R00RC02](#)  
[RER70F27R4P](#) [VPR5F-600](#) [VPR5F250](#) [VPR10F-8K](#) [VPR10F-6K](#) [VPR10F225](#) [VPR10F-1.75K](#) [VPR10F-1.25K](#) [VPR10F-125](#) [VPR10F10](#)  
[VP50KA-12K](#) [VP50KA-100K](#) [VP25KA-5000](#) [VK100NA250](#) [VK100NA-15](#) [620-5R00-FBW](#) [L100J150E-MT1](#) [L50J500E-MT1](#) [VPR10F-](#)  
[8.5K](#)