

# SPECIFICATION CONTROL DRAWING


55PC2126

TITLE TWO CONDUCTOR CABLE, FLAT BRAID SHIELDED, 600 VOLT

Date 03-05-02

Revision D

This specification sheet forms a part of the latest issue of Raychem Specification 55PC.

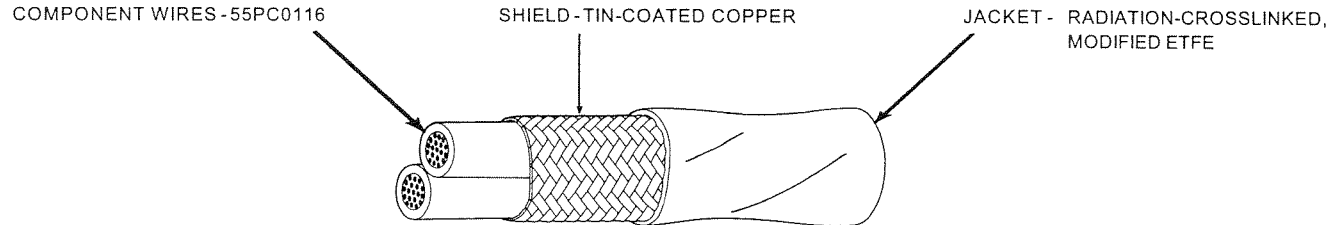

### CONSTRUCTION DETAILS

| PART NUMBER   | CONDUCTOR SIZE (AWG) | SHIELD STRAND THICKNESS (± .0004 in.) | JACKET THICKNESS (in.) |             | DIAMETER (in.)   |              |                  | WEIGHT (lbs/1000 ft.) |                  |
|---------------|----------------------|---------------------------------------|------------------------|-------------|------------------|--------------|------------------|-----------------------|------------------|
|               |                      |                                       | LOWER SPEC LIMIT       | TARGET WALL | LOWER SPEC LIMIT | TARGET VALUE | UPPER SPEC LIMIT | TARGET VALUE          | UPPER SPEC LIMIT |
| 55PC2126-26-* | 26                   | .0015                                 | .0060                  | .0075       | .078             | .083         | .087             | 4.96                  | 5.38             |
| 55PC2126-24-* | 24                   | .0015                                 | .0060                  | .0075       | .088             | .093         | .097             | 6.48                  | 6.95             |
| 55PC2126-22-* | 22                   | .0015                                 | .0060                  | .0075       | .100             | .105         | .109             | 8.68                  | 9.20             |
| 55PC2126-20-* | 20                   | .0015                                 | .0060                  | .0080       | .117             | .122         | .126             | 12.24                 | 12.86            |
| 55PC2126-18-* | 18                   | .0015                                 | .0060                  | .0080       | .136             | .141         | .145             | 17.29                 | 18.09            |
| 55PC2126-16-* | 16                   | .0015                                 | .0060                  | .0080       | .150             | .156         | .161             | 21.36                 | 22.25            |

### CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 150°C  
 Maximum continous conductor temperature  
 VOLTAGE RATING: 600 volts (rms)  
 CROSSLINK VERIFICATION: 300 ± 3°C for 1 hour  
 DIELECTRIC WITHSTAND: 1500 volts (rms), 60 Hz  
 JACKET COLOR: White preferred  
 JACKET ELONGATION AND TENSILE STRENGTH:  
 Elongation, 50% (minimum)  
 Tensil Strength, 5000 lbf/in<sup>2</sup> (minimum)  
 JACKET FLAWS:  
 Spark Test, 1000 volts (rms), 100% test  
 Impulse Dielectric Test, 6.0 kV (peak), 100% test

SHIELD COVERAGE: 85% (minimum)  
 VOLTAGE WITHSTAND TEST (POST ENVIRONMENTAL):  
 1000 volts (rms), 60 Hz, 1 minute

PART NUMBER:  
 The "\*" in the part numbers above shall be replaced by a color code designator with a slash separating the component wire colors and a dash separating the component wire colors from the jacket color.  
 Example: AWG 22, red and blue component wires; white jacket: 55PC2126-22-2/6-9

COLOR AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Hook-up Wire](#) category:*

*Click to view products by [TE Connectivity](#) manufacturer:*

Other Similar products are found below :

[8918-BRN-1000](#) [8920-DK-BLU-1000](#) [CR6328-000](#) [01776.38.01](#) [M22759/16-14-5-500FT](#) [7053-RED-1000](#) [7053-SLATE-1000](#) [F25935-000](#)  
[F60898-000](#) [8055](#) [81044/12-18-9CS3209](#) [82A0811-4-9-G110](#) [83004-ORG-1000](#) [83005-LT-BLU-1000](#) [83025-VIO-1000](#) [8523-RED-100](#)  
[8524-WHT-100](#) [8525-ORG-1000](#) [8530-BLK-1000](#) [8530-LT-BLU-100](#) [8538-009-1000](#) [8597-LT-BLU-100](#) [8898-BLK-100](#) [138498-000](#)  
[E76065-000](#) [EPD50886A-20-9](#) [BFWUL3239-24-PINK](#) [C2015A.12.04](#) [C2015A.12.05](#) [C2015A.12.08](#) [C2015A.12.10](#) [C2015A.12.19](#)  
[C2016A.12.05](#) [C2016A.12.07](#) [C2065A.12.02](#) [C77653-000](#) [220368-001](#) [8916-GRY-500](#) [8918-RED-100](#) [8919-DK-BLU-1000](#) [8919-YEL-100](#)  
[8920-YEL-100](#) [9242833001](#) [933205-000](#) [2841/7-YELLOW-1000](#) [2842/7-ORANGE-100](#) [2842/7-RED-1000](#) [2843/19-BLUE-100](#) [2843/1-](#)  
[YELLOW-100](#) [2843/7-GREEN-100](#)