
SPECIFICATION CONTROL DRAWING

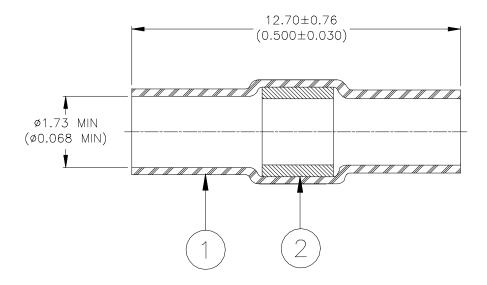

MATERIALS

- 1. INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked modified polyvinylidene fluoride.
- 2. SOLDER PREFORM WITH FLUX:

SOLDER: TYPE Sn63 per ANSI-J-STD-006. FLUX: TYPE ROL1 per ANSI-J-STD-004.

APPLICATION

- 1. This part is designed to make a 1 to 1 and 2 to 1 in-line splices with 26 AWG tin or silver plated wires having insulations rated for at least 125°C.
- 2. Wires are to be stripped 6.35 (0.250) and overlapped under the solder preform.
- 3. Part may be installed with either convection or infrared heaters.

TUCO/Electronics/Raychem 307 Constitution Drive Menlo Park, CA 94025, USA					Wire and Harnessing Products	SOLDERSLEEVE WIRE SPLICE			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE BETWEEN BRACKETS.						DOCUMENT NO.: D-110-0073			
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ROUGHNESS IN		Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		DCR NUMBER: D010095		REPLACES: N/A		
DRAWN BY: M. FORONDA		DATE: 04-Apr01			PROD. REV. A	DOC ISSUE:	SCALE: None	SIZE:	SHEET: 1 of 1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Solder Sleeves & Shield Tubing category:

Click to view products by TE Connectivity manufacturer:

Other Similar products are found below:

899170-000 620040N001 620069N003 CTA-0050-01 629624-000 6500750004 6501390002 CX0781-000 696396-000 697080-000 D-150-0331CS2902 D-181-1222-90/9CS2800 D-300-01CS1108 715325N001 908357N001 982127-1 D-436-0182CS246 D-436-37CS2651 D-436-61CS246 D-436-82-CS2621 D-659-0087 E53797N001 CB0213-000 CB0219-000 S200-2-01 S200-4-00CS2904 LSS-81-16AA-CS5575 ST18-2-00 FLX40-020-04-CS8651 325534-000 CTA-0025 D-108-07CS436 D-128-0010 D-141-0108CS404 D-144-41CS1371 D-150-0231-NRCS2896 D-150-1011 395947-000 427243N001 B-801-18-01 515-9 C67137-000 CB0220-000 D-436-0185CS1102 D-436-36CS2908 D-436-37CS2908 D-436-52CS246 D44133N001 LSS-26-8A 626168-000