


SPECIFICATION CONTROL DRAWING

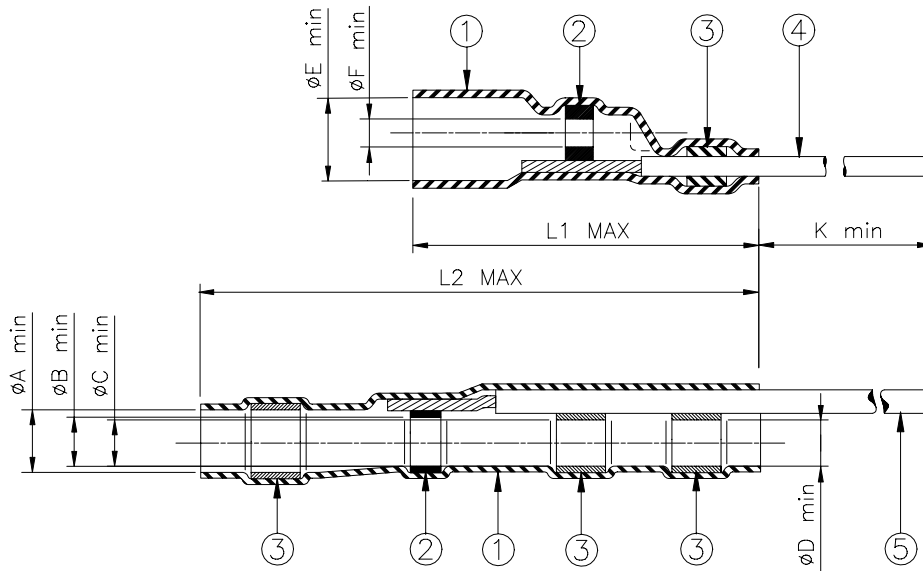

Product Revision		GA = WIRE GAUGE (AWG)									
Product Name		Product Dimensions									
		øA min	øB min	øC min	øD min	øE min	øF min	L1 max	L2 max	K min	AWG
D-181-2220-90/9	F										20
D-181-2222-90/9	F	4.50	4.00	3.45	2.90	3.00	1.10	17.00	22.7	150	22
D-181-2224-90/9	F	(0.180)	(0.160)	(0.135)	(0.115)	(0.120)	(0.045)	(0.670)	(0.895)	(5.900)	24
D-181-2226-90/9	F										26


MATERIALS

- INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked modified polyvinylidene fluoride.
- SOLDER PREFORM WITH FLUX:
SOLDER: TYPE Sn63 per ANSI-J-STD-006.
FLUX: TYPE ROL1 per ANSI-J-STD-004.
- MELTABLE RINGS: Thermally stabilized thermoplastic. Color: gray.
- GROUND LEAD: Raychem 55A0111-GA-9 in accordance with MIL-W-22759/32, AWG GA (see table), stranded tin plated. Color: white
- GROUND LEAD: Raychem 55A0111-GA-90 in accordance with MIL-W-22759/32, AWG GA (see table), stranded tin plated. Color: white with black stripe.

APPLICATION

- These parts are designed to provide an environment protected coaxial termination on cables, rated for 125°C minimum, meeting the dimensional criteria listed, having a tin or silverplated copper shields.
- Temperature range: -55°C to +150°C. Install using Raychem-approved convection or infrared heating tools in accordance with Raychem process standard RCPS-200-36.

For best results, prepare the cable as shown:

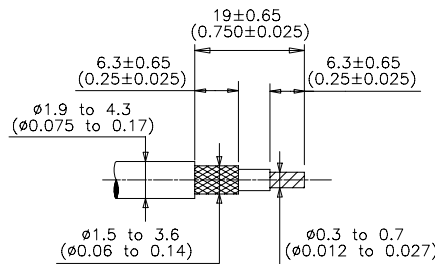

SolderSleeve is a trademark of Tyco Electronics Corporation.

tyco Electronics		Tyco Electronics Corporation 300 Constitution Drive, Menlo Park, CA. 94025, U.S.A.		Raychem		TITLE: COAXIAL SOLDERSLLEEVE DEVICE WITH PRE-INSTALLED LEAD	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE BETWEEN BRACKETS.						DOCUMENT NO.: D-181-22GA-90/9	
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A	Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.				DATE: Jun. 15, 1998	DOC ISSUE: 3
DRAWN BY: M. FORONDA	CAGE CODE: 06090	REPLACES: D18122XX	DCR NUMBER: D981012	PROD. REV.: SEE TABLE	SCALE: None	SIZE: A	SHEET: 1 of 1

If this document is printed it becomes uncontrolled. Check for the latest revision.

© 2004 Tyco Electronics Corporation. All rights reserved

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Solder Sleeves & Shield Tubing](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[899170-000](#) [620040N001](#) [620069N003](#) [CTA-0050-01](#) [629624-000](#) [6500750004](#) [6501390002](#) [CX0781-000](#) [696396-000](#) [697080-000](#) [D-150-0331CS2902](#) [D-181-1222-90/9CS2800](#) [D-300-01CS1108](#) [715325N001](#) [908357N001](#) [982127-1](#) [D-436-0182CS246](#) [D-436-37CS2651](#) [D-436-61CS246](#) [D-436-82-CS2621](#) [D-659-0087](#) [E53797N001](#) [CB0213-000](#) [CB0219-000](#) [S200-2-01](#) [S200-4-00CS2904](#) [LSS-81-16AA-CS5575](#) [ST18-2-00](#) [FLX40-020-04-CS8651](#) [325534-000](#) [CTA-0025](#) [D-108-07CS436](#) [D-128-0010](#) [D-141-0108CS404](#) [D-144-41CS1371](#) [D-150-0231-NRCS2896](#) [D-150-1011](#) [395947-000](#) [427243N001](#) [B-801-18-01](#) [515-9](#) [C67137-000](#) [CB0220-000](#) [D-436-0185CS1102](#) [D-436-36CS2908](#) [D-436-37CS2908](#) [D-436-52CS246](#) [D44133N001](#) [LSS-26-8A](#) [626168-000](#)